PVC Marking Tape, Green (RAL 6029), 10 cm x 30 m



AT A GLANCE

- PVC marking tape, green (RAL 6029).
- 10 cm x 30 m, 0.6 kg.
- Green per ASR A1.3: escape routes and first aid.
- Abrasion-resistant backing, tears by hand.

Product code	**ATO 8250-G**
Category	**Adhesive and Warning Tapes**
Weight	**0.6 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/banda-adeziva-de-marcare-din-pvc-verde-ral-6029-10-cm-x-30-m

Technical specifications

Type	Adhesive floor marking tape
Material	PVC, abrasion-resistant backing
Width	10 cm
Length	30 m
Color	Green (RAL 6029)
Use	Escape routes, first aid, assembly points (ASR A1.3)
Application	On a clean, dry floor free of dust or oil; press it down firmly, especially at the ends; tears by hand
Duration	For temporary markings

Description

The ATO 8250-G has the same RAL 6029 shade but is 10 cm wide. In ASR A1.3 green means a safe condition, so the wide tape marks escape routes in large halls, assembly points and first-aid areas that must be seen from a distance.

Technical data

- width: 10 cm;
- length: 30 m per roll;
- material: PVC;
- colour: green RAL 6029;
- weight: 0.6 kg.

The colour under ASR A1.3

The tape's shade is RAL 6029. For the safety green, ASR A1.3 refers to ISO 3864-4, usually RAL 6032. For ordinary traffic routes, the same rule recommends white or yellow lines at least 5 cm wide.

How much you need

A 15 m escape route marked on both sides uses 30 m, which is one roll.

Applying it

Clean and dry the floor, then lay the tape along a chalk line and press it down firmly along its length and at the corners. It tears by hand, no scissors needed. The PVC backing resists abrasion, but the tape is made for temporary markings.

Other versions

Narrower, at 5 cm, is the ATO 8200-G. For firefighting equipment, the 10 cm red is the ATO 8250-R.


Drawings and details · 1/3

Dimensiuni
Dimensions

ATO 8250-G



Rolă de 30 m · 0,6 kg
30 m roll · 0.6 kg

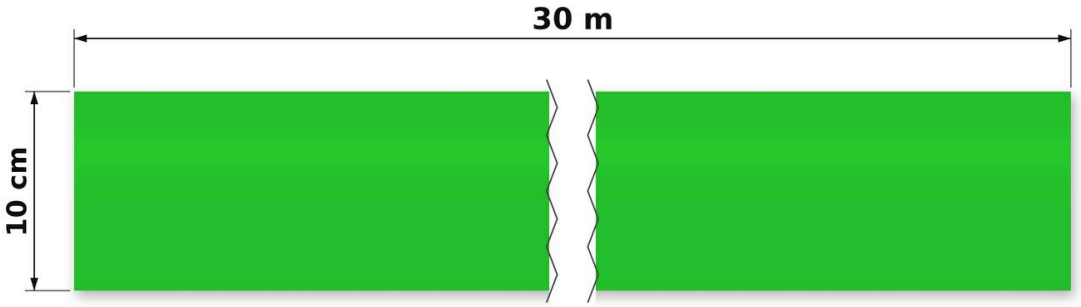

lățimea benzii la scară, lungimea întreruptă
tape width to scale, length broken

ATO 8250-G dimensions

Drawings and details · 2/3

Aplicare și culoare
Application and colour

ATO 8250-G

Ce marchează culoarea
What the colour marks

Căi de evacuare, prim ajutor, puncte de adunare (ASR A1.3)

Escape routes, first aid, assembly points (ASR A1.3)

Culoare
Colour

Verde (RAL 6029)

Green (RAL 6029)

Material
Material

PVC, suport rezistent la abraziune

PVC, abrasion-resistant backing

Aplicare
Application

Pe pardoseală curată, uscată, fără praf sau ulei; se apasă ferm, mai ales la capete; se rupe cu mâna

On a clean, dry floor free of dust or oil; press it down firmly, especially at the ends; tears by hand

Durată
Duration

Pentru marcaje temporare

For temporary markings

Cât îți trebuie
How much you need

Un dreptunghi de 1 x 1,5 m cere 5 m de bandă: o rolă de 30 m ajunge pentru 6 asemenea zone.


A 1 x 1.5 m rectangle takes 5 m of tape: one 30 m roll is enough for 6 such areas.

ATO 8250-G application

Drawings and details · 3/3

Utilizare: zonă marcată pe pardoseală (vedere de sus) **ATO 8250-G**

Use: an area marked on the floor (seen from above)

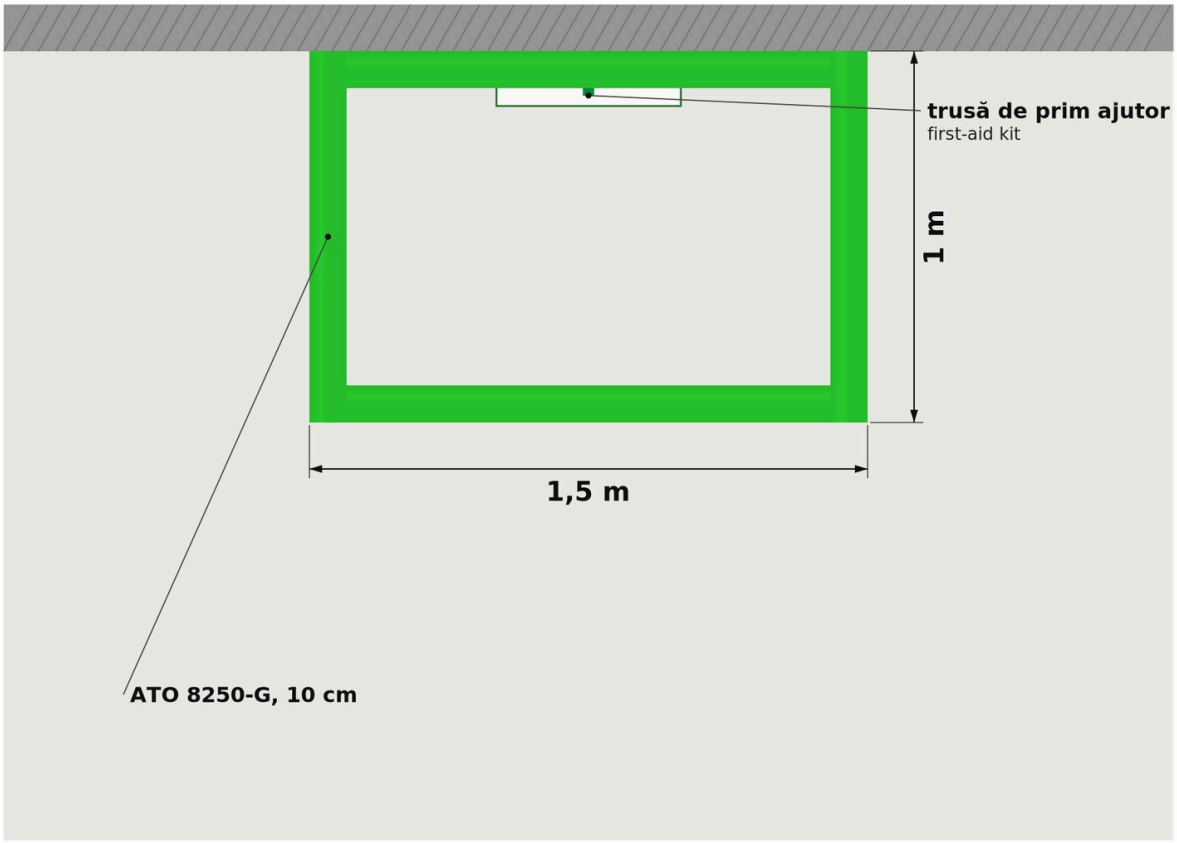

Verde (RAL 6029): căi de evacuare, prim ajutor, puncte de adunare (ASR A1.3).
Green (RAL 6029): escape routes, first aid, assembly points (ASR A1.3).

Zona de 1 x 1,5 m are 5 m de contur: o rolă de 30 m ajunge pentru 6 asemenea zone.
The 1 x 1.5 m area has a 5 m outline: one 30 m roll is enough for 6 such areas.

Where ATO 8250-G is used