Reflective Adhesive Tape, Yellow-Black, 5 cm x 46 m



AT A GLANCE

- Reflective adhesive tape, yellow-black stripes.
- 5 cm x 46 m, 0.5 kg.
- For permanent obstacles (ASR A1.3).
- Apply at +5 °C or above; not on asphalt.

Product code	**ATO 8402**
Category	**Adhesive and Warning Tapes**
Weight	**0.5 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/banda-adeziva-reflectorizanta-galben-negru-5-cm-x-46-m

Technical specifications

Type	Reflective adhesive tape for obstacles
Width	5 cm
Length	46 m
Color	Yellow and black, diagonal stripes
Application temperature	At least +5 °C
Surface	Smooth, clean and dry: metal, plastic, painted wood, finished concrete; not on asphalt
Drying time	None; ready to use once pressed down
Use	Permanent obstacles and dangerous spots (ASR A1.3): columns, low beams, ramps, docks, thresholds

Description

Under ASR A1.3, yellow-black marks permanent obstacles and dangerous spots: places where you can bump into something, get caught or fall. The ATO 8402 adds reflection, so a low beam at the entrance to an underground garage, the edge of a loading dock or a column in the middle of an aisle also shows in headlights.

Technical data

- width: 5 cm;
- length: 46 m per roll;
- colour: yellow and black, diagonal stripes;

- weight: 0.5 kg.

The colour under ASR A1.3

The stripes are diagonal. ASR A1.3 asks for them at about 45° and equally wide, over the whole size of the obstacle. For temporary hazards, the same rule recommends red-white.

Applying it

Apply the tape at +5 °C or above, on a smooth, clean and dry surface: metal, plastic, painted wood or finished concrete. It does not go on asphalt. Once pressed down well, it is ready to use.

Where it is used

In underground car parks, warehouses, workshops and logistics centres: on columns, low beams, ramp and dock edges, thresholds and machine corners.

Other versions

Wider, at 10 cm, is the ATZ R04. In red-white, for temporary obstacles, 5 cm, there is the ATZ R01. For a non-reflective floor marking, see the PVC tape ATO 8200-YBK.


Drawings and details · 1/3

Dimensiuni
Dimensions

ATO 8402



Rolă de 46 m · 0,5 kg
46 m roll · 0.5 kg

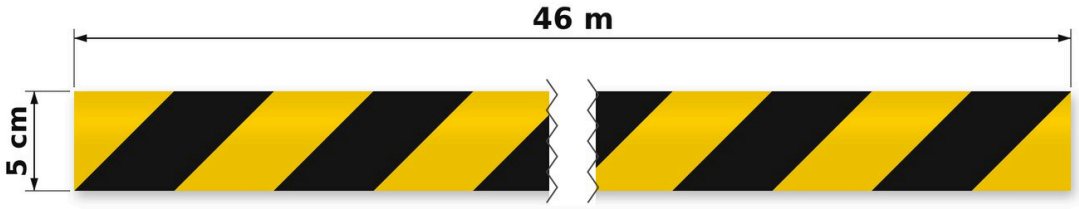

lățimea benzii la scară, lungimea întreruptă
tape width to scale, length broken

ATO 8402 dimensions

Drawings and details · 2/3

Aplicare
Application

ATO 8402

Tip
Type

Bandă adezivă reflectorizantă pentru obstacole

Reflective adhesive tape for obstacles

Temperatura de aplicare
Application temperature

Minimum +5 °C

At least +5 °C

Suprafață
Surface

Netedă, curată și uscată: metal, plastic, lemn vopsit, beton finisat; nu pe asfalt

Smooth, clean and dry: metal, plastic, painted wood, finished concrete; not on asphalt

Timp de uscare
Drying time

Nu are; e gata de folosit după ce a fost apăsată

None; ready to use once pressed down

Unde se pune
Where it goes

Obstacole și locuri periculoase permanente (ASR A1.3): stâlpi, grinzi joase, rampe, docuri, praguri

Permanent obstacles and dangerous spots (ASR A1.3): columns, low beams, ramps, docks, thresholds

Culoare
Colour

Galben și negru, dungi în diagonală


Yellow and black, diagonal stripes

ATO 8402 application

Drawings and details · 3/3

Utilizare: intrare în parcare, grindă joasă și stâlpi **ATO 8402**

Use: car park entrance, low beam and columns

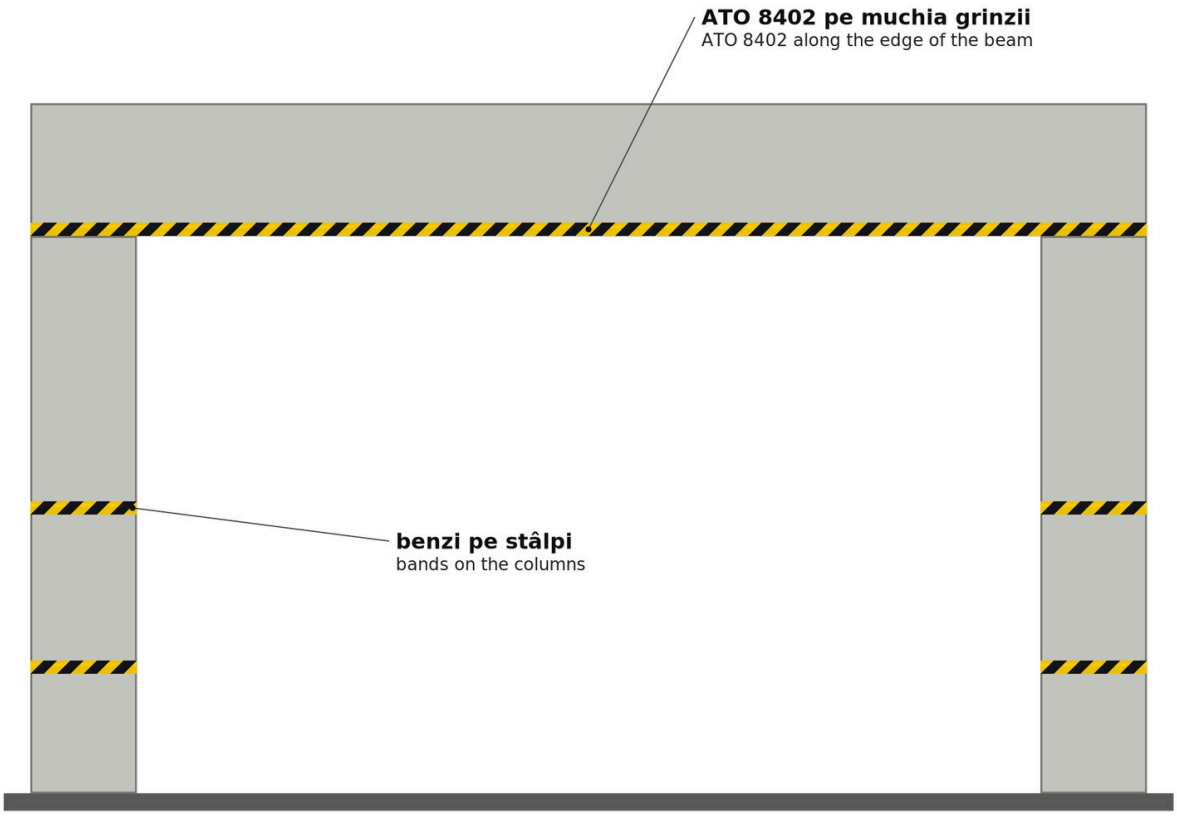

Galben-negru după ASR A1.3: obstacole și locuri periculoase permanente, în care te poți lovi, prinde sau cădea.
Yellow-black under ASR A1.3: permanent obstacles and dangerous spots, where you can bump into something, get caught or fall.
Se lipește la minimum +5 °C, pe o suprafață netedă, curată și uscată: metal, plastic, lemn vopsit, beton finisat; nu pe asfalt.
Apply it at +5 °C or above, on a smooth, clean and dry surface: metal, plastic, painted wood, finished concrete; not on asphalt.
Timp de uscare: nu are; e gata de folosit după ce a fost apăsată.
Drying time: none; ready to use once pressed down.

Where ATO 8402 is used