Barrier Tape, Yellow-Black, 6 cm x 200 m



AT A GLANCE

- Yellow-black barrier tape, non-adhesive.
- 6 cm x 200 m, 0.4 kg.
- Polyethylene, at least 60 microns thick.
- Yellow-black per ASR A1.3: permanent hazards.

Product code	**ATO 8120**
Category	**Adhesive and Warning Tapes**
Weight	**0.4 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/banda-de-delimitare-galben-negru-6-cm-x-200-m

Technical specifications

Type	Barrier tape, non-adhesive
Material	Polyethylene (PE)
Thickness	At least 60 µm
Width	6 cm
Length	200 m
Color	Yellow and black, diagonal stripes
Installation	Tied to posts, cones, fences or trees and stretched between them; leaves no marks

Description

Under ASR A1.3, yellow-black marks permanent hazards: places where you can bump into something, get caught or fall. The ATO 8120 is run around such areas where there is no fixed barrier: a crane's working area, the perimeter of a press or a robot, the edge of a ramp or of an area with a fall risk.

Technical data

- width: 6 cm;
- length: 200 m per roll;
- material: polyethylene (PE), at least 60 microns thick;
- colour: yellow and black, diagonal stripes;
- weight: 0.4 kg.

How it is used

The tape has no adhesive: tie it to posts, racking, railings or cones and run it around the area. You can take it down at any time, with nothing left on the floor.

Where it is used

In factories, warehouses, workshops, industrial yards and underground car parks, and outdoors too, along the edge of an area with a fall risk.

Other versions

For temporary hazards, such as an open pit, road works or a building site, ASR A1.3 recommends red-white: the ATO 8020, 200 m, or the ATZ R12, 500 m. For a marking stuck to the floor, see the ATO 8200-YBK yellow-black adhesive tape.


Drawings and details · 1/3

Dimensiuni
Dimensions

ATO 8120



Rolă de 200 m · 0,4 kg
200 m roll · 0.4 kg

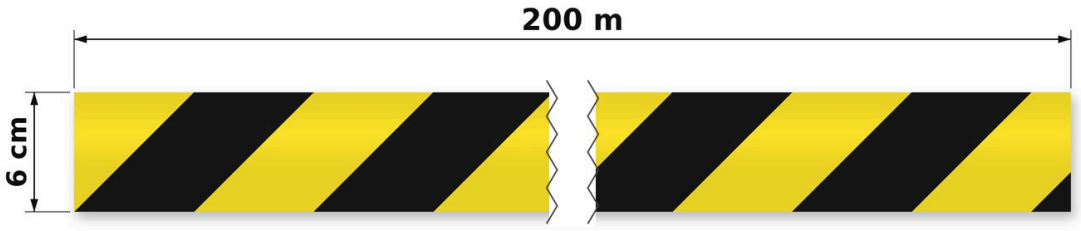

lățimea benzii la scară, lungimea întreruptă
tape width to scale, length broken

ATO 8120 dimensions

Drawings and details · 2/3

Material și montaj
Material and installation

ATO 8120

Tip
Type

Bandă de delimitare, fără adeziv

Barrier tape, non-adhesive

Material
Material

Polietilenă (PE)

Polyethylene (PE)

Grosime
Thickness

Minimum 60 µm

At least 60 µm

Culoare
Colour

Galben și negru, dungi în diagonală

Yellow and black, diagonal stripes

Montaj
Installation

Se leagă de stâlpi, conuri, garduri sau copaci și se întinde între ele; nu lasă urme

Tied to posts, cones, fences or trees and stretched between them; leaves no marks

Cât îți trebuie
How much you need

O zonă de 30 x 20 m are 100 m de contur: o rolă de 200 m ajunge pentru 2 asemenea zone.

A 30 x 20 m area has a 100 m perimeter: one 200 m roll is enough for 2 such areas.

ATO 8120 material and installation

Drawings and details · 3/3

Utilizare: zonă închisă cu stâlpi mobili

ATO 8120

Use: an area closed off with portable posts



Galben-negru după ASR A1.3: pericole permanente, ca zona de lucru a unei macarale sau perimetrul unei prese.
Yellow-black under ASR A1.3: permanent hazards, such as a crane's working area or the perimeter of a press.

Se leagă de stâlpi, conuri, garduri sau copaci și se întinde între ele; nu lasă urme.
Tied to posts, cones, fences or trees and stretched between them; leaves no marks.

O zonă de 30 x 20 m are 100 m de contur: o rolă de 200 m ajunge pentru 2 asemenea zone.
A 30 x 20 m area has a 100 m perimeter: one 200 m roll is enough for 2 such areas.

Stâlpii se comandă separat.
The posts are ordered separately.

Where ATO 8120 is used