ECE 104 Class C Reflective Tape, White, 5 cm x 46 m



AT A GLANCE

- ECE 104 class C reflective tape, white.
- 5 cm x 46 m, 1.2 kg.
- Used on the sides of the vehicle.
- For lorry and trailer conspicuity marking.

Product code	**ATO 8415**
Category	**Adhesive and Warning Tapes**
Weight	**1.2 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/banda-reflectorizanta-ece-104-clasa-c-alba-5-cm-x-46-m

Technical specifications

Type	Conspicuity tape for vehicle contour marking
Approval	ECE 104, class C; E11, 104R mark on the roll
Width	5 cm
Length	46 m
Color	White
Position on the vehicle	Sides
Surface	Clean, dry and rust-free; press it down along its whole length
Side marking	At least 80% of the vehicle length, cab excluded (60% or 40% in difficult cases)
Height of the lower line	250-1500 mm above the ground (up to 2500 mm in special cases)
Upper corners	Markings of at least 250 mm, no more than 400 mm below the top edge

Description

On the sides of a long lorry, white tape shows the vehicle's length at night, so drivers coming out of a junction see that a trailer follows, not an empty gap. The ATO 8415 is the white ECE 104 class C approved tape, with the E11 mark and the 104R number printed on it. White is used only on the sides.

Technical data

- width: 5 cm;

- length: 46 m per roll;
- colour: white;
- approval: ECE 104, class C;
- weight: 1.2 kg.

The side marking

At least 80% of the vehicle length, excluding the cab, is marked, or at least 60% or 40% in difficult cases. The lower line sits between 250 and 1500 mm above the ground, extendable to 2500 mm in special cases. The upper corners are marked over at least 250 mm, within 400 mm of the top edge.

How much you need

A 13.6 m semi-trailer marked on both sides with the lower line and the upper corners uses about 25 m, which is one roll per vehicle.


Other colours

For the rear use red, the ATO 8414. Yellow, the ATO 8413, works on both the sides and the rear.


Drawings and details · 1/3

Dimensiuni
Dimensions

ATO 8415

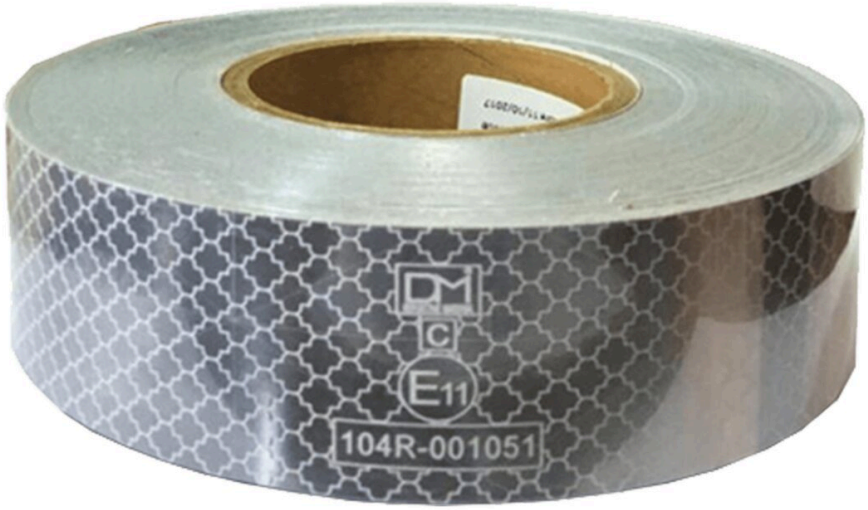

Rolă de 46 m · 1,2 kg
46 m roll · 1.2 kg

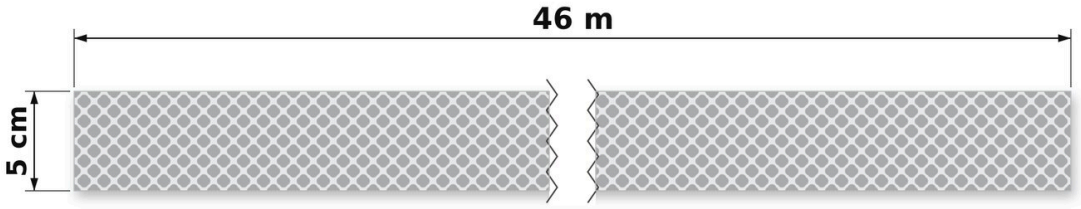

lățimea benzii la scară, lungimea întreruptă
tape width to scale, length broken

ATO 8415 dimensions

Drawings and details · 2/3

Omologare și aplicare
Approval and application

ATO 8415

Omologare
Approval

ECE 104, clasa C; marcaj E11, 104R pe rolă

ECE 104, class C; E11, 104R mark on the roll

Marcajul de pe rolă, fotografiat →
The mark on the roll, photographed



Poziție pe vehicul
Position on the vehicle

Lateral

Sides

Suprafață
Surface

Curată, uscată și fără rugină; se apasă bine pe toată lungimea

Clean, dry and rust-free; press it down along its whole length

Marcaj lateral
Side marking

Minimum 80% din lungimea vehiculului, fără cabină (în cazuri dificile 60% sau 40%)

At least 80% of the vehicle length, cab excluded (60% or 40% in difficult cases)

Înălțimea liniei de jos
Height of the lower line

250-1500 mm de la sol (în cazuri speciale până la 2500 mm)


250-1500 mm above the ground (up to 2500 mm in special cases)

ATO 8415 ECE 104 approval

Drawings and details · 3/3

Utilizare: marcaj pe lateral (ECE 104) **ATO 8415**

Use: side marking (ECE 104)

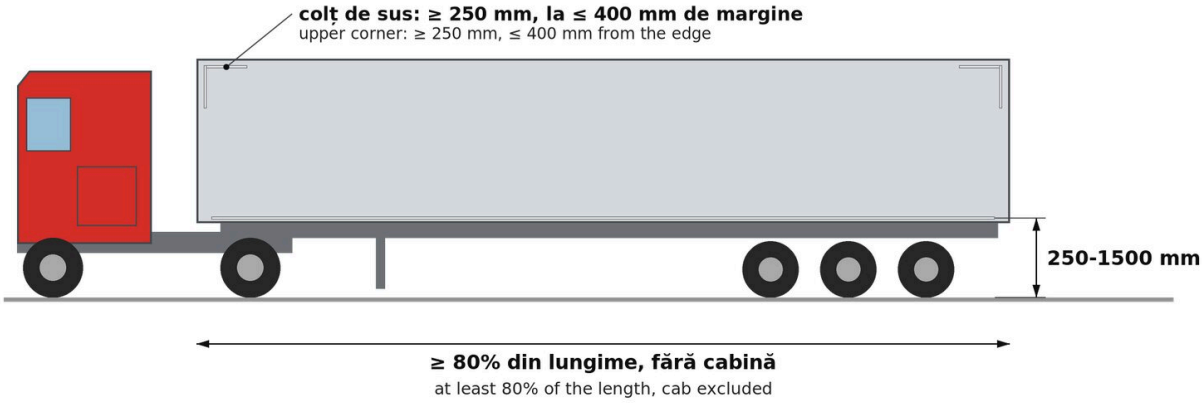

Poziție: lateral. ECE 104, clasa C; marcaj E11, 104R pe rolă.
Position: sides. ECE 104, class C; E11, 104R mark on the roll.

Where ATO 8415 is used