ECE 104 Class C Reflective Tape, Yellow, 5 cm x 46 m



AT A GLANCE

- ECE 104 class C reflective tape, yellow.
- 5 cm x 46 m, 1.2 kg.
- May be used on the sides and at the rear.
- For lorry and trailer conspicuity marking.

Product code	**ATO 8413**
Category	**Adhesive and Warning Tapes**
Weight	**1.2 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/banda-reflectorizanta-ece-104-clasa-c-galbena-5-cm-x-46-m

Technical specifications

Type	Conspicuity tape for vehicle contour marking
Approval	ECE 104, class C; E11, 104R mark on the roll
Width	5 cm
Length	46 m
Color	Yellow
Position on the vehicle	Sides and rear
Surface	Clean, dry and rust-free; press it down along its whole length
Side marking	At least 80% of the vehicle length, cab excluded (60% or 40% in difficult cases)
Height of the lower line	250-1500 mm above the ground (up to 2500 mm in special cases)
Upper corners	Markings of at least 250 mm, no more than 400 mm below the top edge
Rear marking	Full contour, where the vehicle's build allows

Description

Large lorries and trailers must have their outline marked with approved reflective tape. The ATO 8413 meets ECE 104 class C, and the roll carries the E11 approval mark with the 104R number. Yellow is the only colour that may be used on both the sides and the rear.

Technical data

- width: 5 cm;
- length: 46 m per roll;
- colour: yellow;
- approval: ECE 104, class C;
- weight: 1.2 kg.

How it goes on the vehicle

- on the sides, at least 80% of the vehicle length, excluding the cab, is marked; in difficult cases at least 60% or 40%;
- the lower line sits at least 250 mm above the ground and at most 1500 mm, or 2500 mm in special cases;
- the upper corner markings are at least 250 mm long and placed as high as possible, within 400 mm of the top of the vehicle;
- the rear gets a full outline, unless the vehicle's construction does not allow it.

Other colours

For the rear there is the red version, the ATO 8414, and for the sides the white version, the ATO 8415.


Drawings and details · 1/3

Dimensiuni
Dimensions

ATO 8413



Rolă de 46 m · 1,2 kg
46 m roll · 1.2 kg

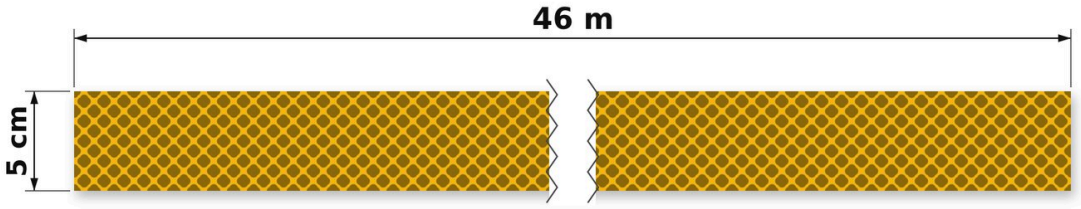

lățimea benzii la scară, lungimea întreruptă
tape width to scale, length broken

ATO 8413 dimensions

Drawings and details · 2/3

Omologare și aplicare
Approval and application

ATO 8413

Omologare
Approval

ECE 104, clasa C; marcaj E11, 104R pe rolă

ECE 104, class C; E11, 104R mark on the roll

Marcajul de pe rolă, fotografiat →
The mark on the roll, photographed



Poziție pe vehicul
Position on the vehicle

Lateral și spate

Sides and rear

Suprafață
Surface

Curată, uscată și fără rugină; se apasă bine pe toată lungimea

Clean, dry and rust-free; press it down along its whole length

Marcaj lateral
Side marking

Minimum 80% din lungimea vehiculului, fără cabină (în cazuri dificile 60% sau 40%)

At least 80% of the vehicle length, cab excluded (60% or 40% in difficult cases)

Înălțimea liniei de jos
Height of the lower line

250-1500 mm de la sol (în cazuri speciale până la 2500 mm)


250-1500 mm above the ground (up to 2500 mm in special cases)


ATO 8413 ECE 104 approval

Drawings and details · 3/3

Utilizare: contur pe lateral și în spate (ECE 104) **ATO 8413**

Use: side and rear contour (ECE 104)

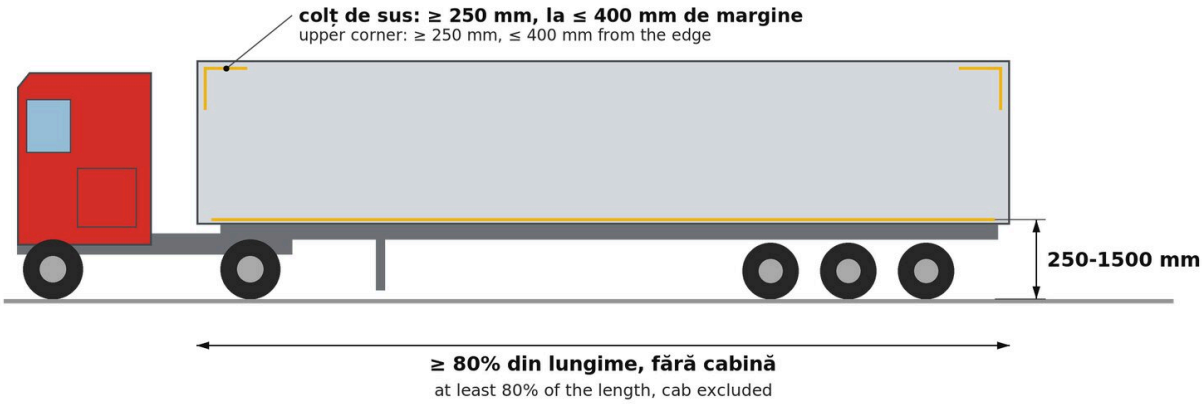

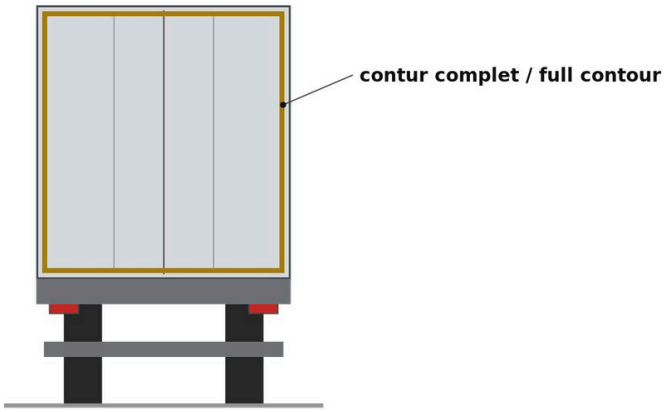

Poziție: lateral și spate. ECE 104, clasa C; marcaj E11, 104R pe rolă.
Position: sides and rear. ECE 104, class C; E11, 104R mark on the roll.

Where ATO 8413 is used