Honeycomb Reflective Tape for Vehicles, White, 10 cm x 46 m



AT A GLANCE

- Honeycomb reflective tape, white.
- 10 cm x 46 m, 2.2 kg.
- For the sides of lorries, trailers, buses.
- Apply at 10-30 °C on flat surfaces with no rivets.

Product code	**ATO 8409**
Category	**Adhesive and Warning Tapes**
Weight	**2.2 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/banda-reflectorizanta-tip-fagure-pentru-vehicule-alba-10-cm-x-46-m

Technical specifications

Type	Reflective tape for vehicles
Design	Honeycomb, hexagonal cells
Width	10 cm
Length	46 m
Color	White
Adhesive	Aggressive, pressure-sensitive
Application temperature	10-30 °C, surface and air
Surface	Flat, clean, dry and rust-free, without rivets
Resistance	To delamination, fading and peeling
Vehicles	Trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles

Description

White reflects the most light of all the tape colours, and the 10 cm width doubles the area that shines in headlights. The ATO 8409 suits the long sides of lorries, trailers, containers and buses, where you want the vehicle noticed from a distance when it is parked on an unlit street.

Technical data

- width: 10 cm;

- length: 46 m per roll;
- colour: white;
- weight: 2.2 kg.

Applying it

The adhesive is aggressive and pressure-sensitive. The surface must be flat, clean, dry and rust-free, with no rivets, and the temperature between 10 and 30 °C. The tape resists delamination, fading and peeling.

How far it goes

A 13.6 m semi-trailer marked on both sides with a continuous strip uses about 27 m, so one roll does one semi-trailer with some left for the rear.

Other versions

For an ECE 104 approved outline on the sides, the white version is the ATO 8415. In 10 cm there is also yellow, the ATO 8410, red, the ATO 8411, and silver, the ATO 8412.


Drawings and details · 1/3

Dimensiuni
Dimensions

ATO 8409



Rolă de 46 m · 2,2 kg
46 m roll · 2.2 kg

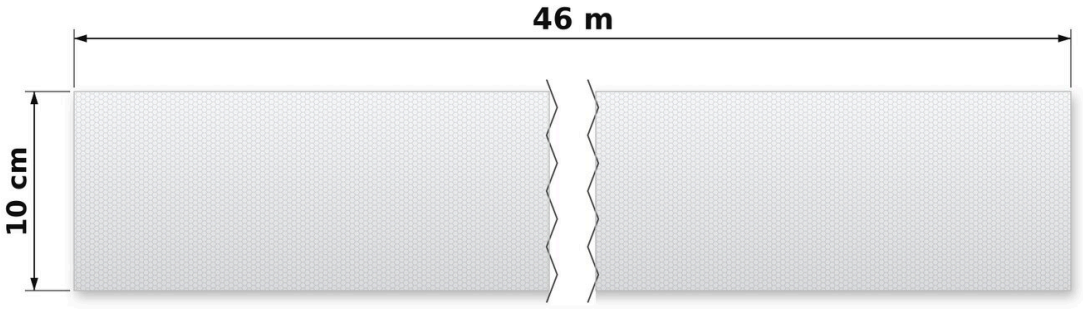

lățimea benzii la scară, lungimea întreruptă
tape width to scale, length broken

ATO 8409 dimensions

Drawings and details · 2/3

Aplicare
Application

ATO 8409

Model
Design

Fagure, celule hexagonale

Honeycomb, hexagonal cells

Adeziv
Adhesive

Agresiv, sensibil la presiune

Aggressive, pressure-sensitive

Temperatura de aplicare
Application temperature

10-30 °C, suprafața și aerul

10-30 °C, surface and air

Suprafață
Surface

Plană, curată, uscată și neruginită, fără nituri

Flat, clean, dry and rust-free, without rivets

Rezistență
Resistance

La delaminare, decolorare și exfoliere

To delamination, fading and peeling

Vehicule
Vehicles

Camioane, remorci, semiremorci, autobuze, rulote, autocisterne, vehicule de pompieri și de salvare


Trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles

ATO 8409 application

Drawings and details · 3/3

Utilizare: pe lateral
Use: on the sides

ATO 8409

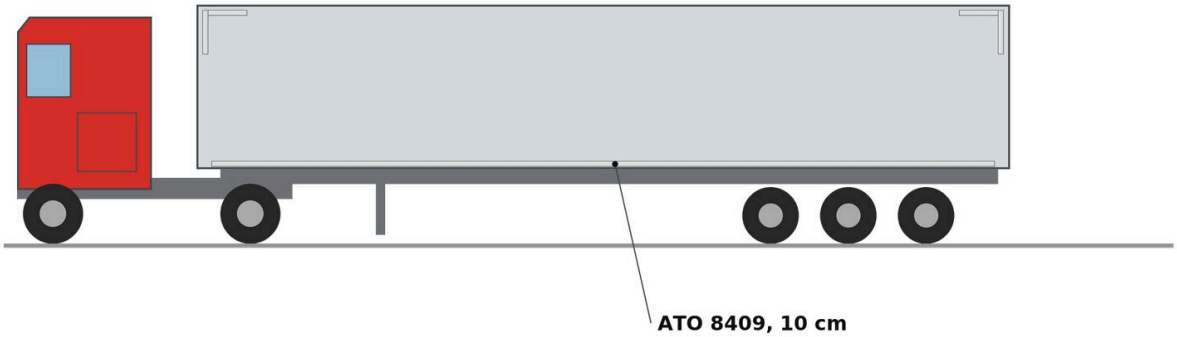

Vehicule: camioane, remorci, semiremorci, autobuze, rulote, autocisterne, vehicule de pompieri și de salvare.
Vehicles: trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles.

Pentru marcajul de contur obligatoriu se folosește banda omologată ECE 104 (ATO 8413, 8414, 8415).
The mandatory contour marking takes the ECE 104 approved tape (ATO 8413, 8414, 8415).

Where ATO 8409 is used