
Honeycomb Reflective Tape for Vehicles, Yellow, 10 cm x 46 m

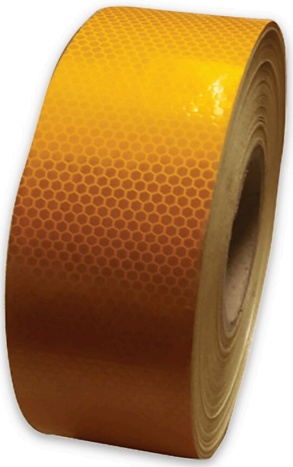

AT A GLANCE

- Honeycomb reflective tape, yellow.
- 10 cm x 46 m, 2.2 kg.
- For lorries, machinery and large vehicles.
- Apply at 10-30 °C, on clean, rust-free metal.

Product code	**ATO 8410**
Category	**Adhesive and Warning Tapes**
Weight	**2.2 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/banda-reflectorizanta-tip-fagure-pentru-vehicule-galbena-10-cm-x-46-m

Technical specifications

Type	Reflective tape for vehicles
Design	Honeycomb, hexagonal cells
Width	10 cm
Length	46 m
Color	Yellow
Adhesive	Aggressive, pressure-sensitive
Application temperature	10-30 °C, surface and air
Surface	Flat, clean, dry and rust-free, without rivets
Resistance	To delamination, fading and peeling
Vehicles	Trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles

Description

Yellow is easy to see both by day and by night, on the side and at the rear. The ATO 8410 is the yellow honeycomb tape in a 10 cm width, for construction machinery, tractors with trailers, snowploughs or refuse vehicles that work at night or in bad weather and must be noticed from a distance.

Technical data

- width: 10 cm;

- length: 46 m per roll;
- colour: yellow;
- weight: 2.2 kg.

Applying it

Apply the tape at 10-30 °C on flat, clean, dry and rust-free surfaces. It does not hold well on rivets or corroded surfaces. The adhesive is aggressive and pressure-sensitive, and the tape resists delamination, fading and peeling.

Where it is used

On lorries and trailers, construction and farm machinery, fire and rescue vehicles, tankers and work vehicles that stop on the road.

Approval

The ECE 104 class C approved yellow tape is the 5 cm ATO 8413.

Other versions

Narrower, at 5 cm, is the ATO 8406. In 10 cm there is also white, red and silver: the ATO 8409, ATO 8411 and ATO 8412.


Drawings and details · 1/3

Dimensiuni
Dimensions

ATO 8410



Rolă de 46 m · 2,2 kg
46 m roll · 2.2 kg

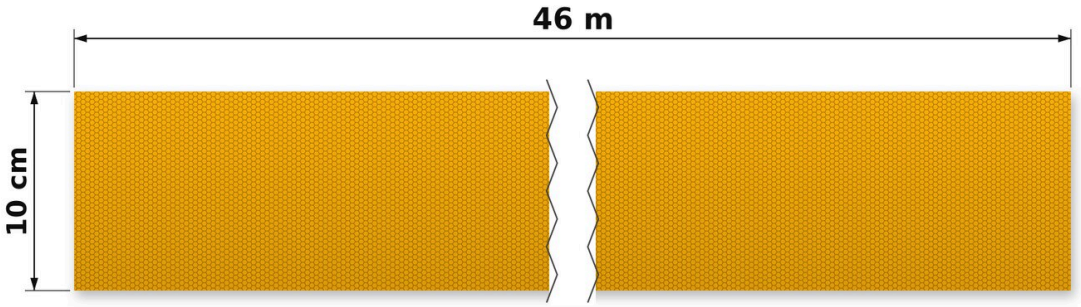

lățimea benzii la scară, lungimea întreruptă
tape width to scale, length broken

ATO 8410 dimensions

Drawings and details · 2/3

Aplicare
Application

ATO 8410

Model
Design

Fagure, celule hexagonale

Honeycomb, hexagonal cells

Adeziv
Adhesive

Agresiv, sensibil la presiune

Aggressive, pressure-sensitive

Temperatura de aplicare
Application temperature

10-30 °C, suprafața și aerul

10-30 °C, surface and air

Suprafață
Surface

Plană, curată, uscată și neruginită, fără nituri

Flat, clean, dry and rust-free, without rivets

Rezistență
Resistance

La delaminare, decolorare și exfoliere

To delamination, fading and peeling

Vehicule
Vehicles

Camioane, remorci, semiremorci, autobuze, rulote, autocisterne, vehicule de pompieri și de salvare


Trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles


ATO 8410 application

Drawings and details · 3/3

Utilizare: pe lateral și în spate **ATO 8410**

Use: on the sides and the rear

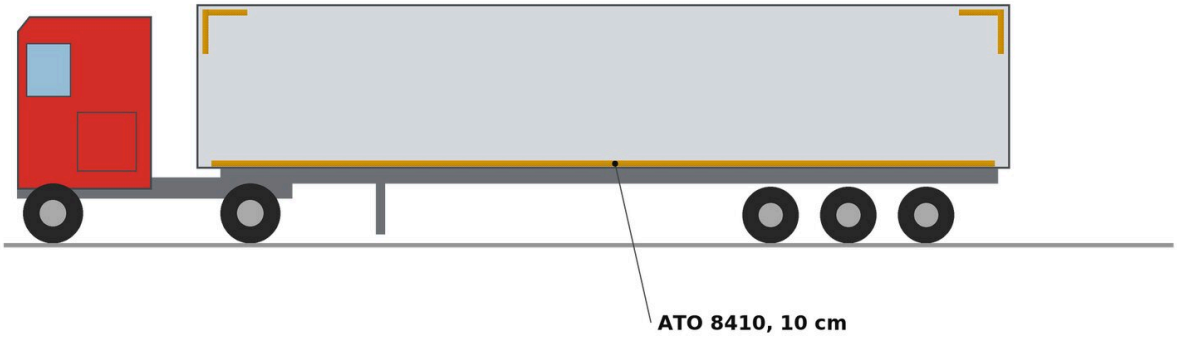

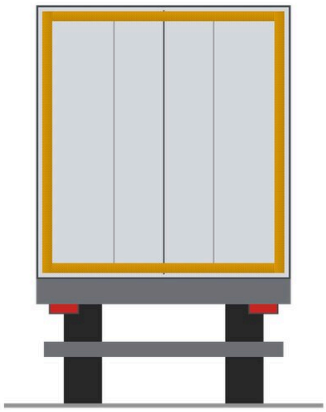

vedere din spate / rear view

Vehicule: camioane, remorci, semiremorci, autobuze, rulote, autocisterne, vehicule de pompieri și de salvare.
Vehicles: trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles.

Pentru marcajul de contur obligatoriu se folosește banda omologată ECE 104 (ATO 8413, 8414, 8415).
The mandatory contour marking takes the ECE 104 approved tape (ATO 8413, 8414, 8415).

Where ATO 8410 is used