
Honeycomb Reflective Tape for Vehicles, Red, 10 cm x 46 m

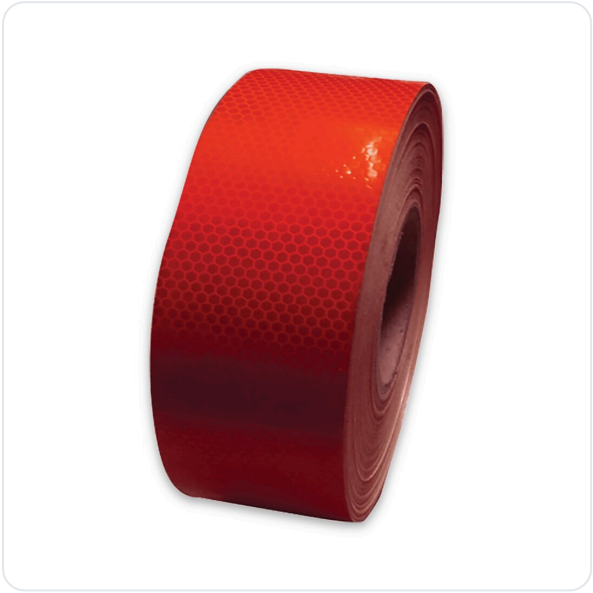

AT A GLANCE

- Honeycomb reflective tape, red.
- 10 cm x 46 m, 2.2 kg.
- For the rear of trailers and machinery.
- Apply at 10-30 °C on flat surfaces with no rivets.

Product code	**ATO 8411**
Category	**Adhesive and Warning Tapes**
Weight	**2.2 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/banda-reflectorizanta-tip-fagure-pentru-vehicule-rosie-10-cm-x-46-m

Technical specifications

Type	Reflective tape for vehicles
Design	Honeycomb, hexagonal cells
Width	10 cm
Length	46 m
Color	Red
Adhesive	Aggressive, pressure-sensitive
Application temperature	10-30 °C, surface and air
Surface	Flat, clean, dry and rust-free, without rivets
Resistance	To delamination, fading and peeling
Vehicles	Trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles

Description

On the back of a low trailer, a farm machine or a transport platform, a 10 cm red strip shows up far better than a 5 cm one. The ATO 8411 has the honeycomb pattern and aggressive adhesive of the whole range in the wide format, for surfaces with room for a wide strip.

Technical data

- width: 10 cm;
- length: 46 m per roll;

- colour: red;
- weight: 2.2 kg.

Applying it

Apply the tape at 10-30 °C on clean, dry, rust-free metal, on a flat surface with no rivets. On corroded sheet metal, clean and paint first. The tape resists delamination, fading and peeling.

Example

For the rear of a 2.5 m wide trailer, one horizontal strip along the bottom and two 1.5 m vertical strips at the sides use 5.5 m. One roll does 8 trailers.

Where it is used

On trailers, semi-trailers, tailgates, farm machinery, towing platforms and emergency vehicles.

Other versions

Narrower, at 5 cm, is the ATO 8407. The ECE 104 approved red tape for the rear of lorries is the ATO 8414.


Drawings and details · 1/3

Dimensiuni
Dimensions

ATO 8411



Rolă de 46 m · 2,2 kg
46 m roll · 2.2 kg

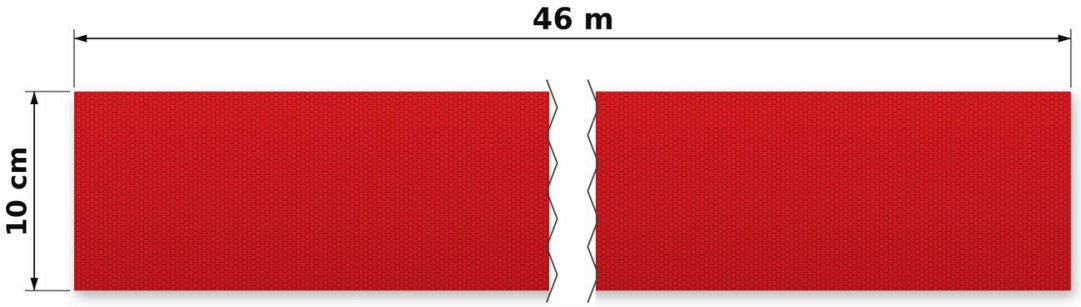

lățimea benzii la scară, lungimea întreruptă
tape width to scale, length broken

ATO 8411 dimensions

Drawings and details · 2/3

Aplicare
Application

ATO 8411

Model
Design

Fagure, celule hexagonale

Honeycomb, hexagonal cells

Adeziv
Adhesive

Agresiv, sensibil la presiune

Aggressive, pressure-sensitive

Temperatura de aplicare
Application temperature

10-30 °C, suprafața și aerul

10-30 °C, surface and air

Suprafață
Surface

Plană, curată, uscată și neruginită, fără nituri

Flat, clean, dry and rust-free, without rivets

Rezistență
Resistance

La delaminare, decolorare și exfoliere

To delamination, fading and peeling

Vehicule
Vehicles

Camioane, remorci, semiremorci, autobuze, rulote, autocisterne, vehicule de pompieri și de salvare


Trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles

ATO 8411 application

Drawings and details · 3/3

Utilizare: în spate
Use: on the rear

ATO 8411

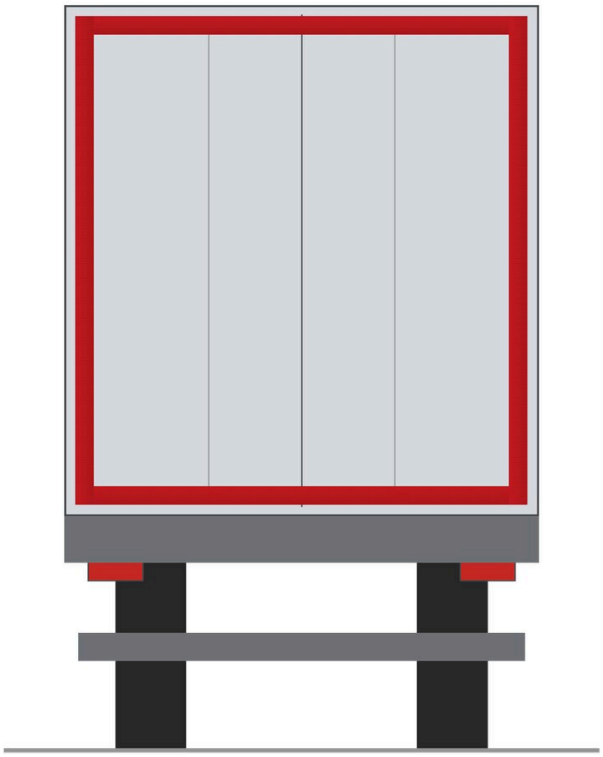

vedere din spate / rear view

Vehicule: camioane, remorci, semiremorci, autobuze, rulote, autocisterne, vehicule de pompieri și de salvare.
Vehicles: trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles.

Pentru marcajul de contur obligatoriu se folosește banda omologată ECE 104 (ATO 8413, 8414, 8415).
The mandatory contour marking takes the ECE 104 approved tape (ATO 8413, 8414, 8415).

Where ATO 8411 is used