
Honeycomb Reflective Tape for Vehicles, Red, 5 cm x 46 m

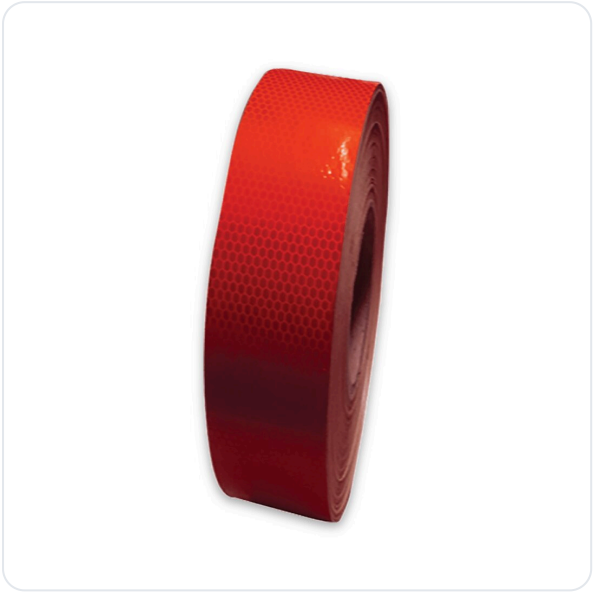

AT A GLANCE

- Honeycomb reflective tape, red.
- 5 cm x 46 m, 1.2 kg.
- For the rear of large vehicles and trailers.
- Apply at 10-30 °C on flat surfaces with no rivets.

Product code	**ATO 8407**
Category	**Adhesive and Warning Tapes**
Weight	**1.2 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/banda-reflectorizanta-tip-fagure-pentru-vehicule-rosie-5-cm-x-46-m

Technical specifications

Type	Reflective tape for vehicles
Design	Honeycomb, hexagonal cells
Width	5 cm
Length	46 m
Color	Red
Adhesive	Aggressive, pressure-sensitive
Application temperature	10-30 °C, surface and air
Surface	Flat, clean, dry and rust-free, without rivets
Resistance	To delamination, fading and peeling
Vehicles	Trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles

Description

Red is the colour of a vehicle's rear: the driver coming up behind recognises it at once. The ATO 8407 is the 5 cm red honeycomb tape, right for outlining the back of a trailer, a caravan, a flatbed or a machine that goes out on the road. The aggressive adhesive keeps it on the bodywork over long distances.

Technical data

- width: 5 cm;

- length: 46 m per roll;
- colour: red;
- weight: 1.2 kg.

Applying it

Apply the tape between 10 and 30 °C on flat, clean, dry surfaces with no rivets. It does not hold well on rusty or corroded metal, so clean and paint the area first. The tape resists delamination, fading and peeling.

Where it is used

On the rear of lorries and trailers, tailgates, caravans, emergency vehicles, and on farm or construction machinery that goes out on the road.

For approval

If you need ECE 104 conspicuity marking on the rear of a lorry or trailer, choose the approved red tape, the ATO 8414.


Other versions

Red in 10 cm is the ATO 8411. For the sides, the 5 cm yellow version is the ATO 8406.


Drawings and details · 1/3

Dimensiuni
Dimensions

ATO 8407

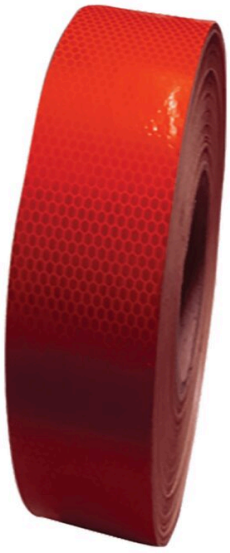

Rolă de 46 m · 1,2 kg
46 m roll · 1.2 kg

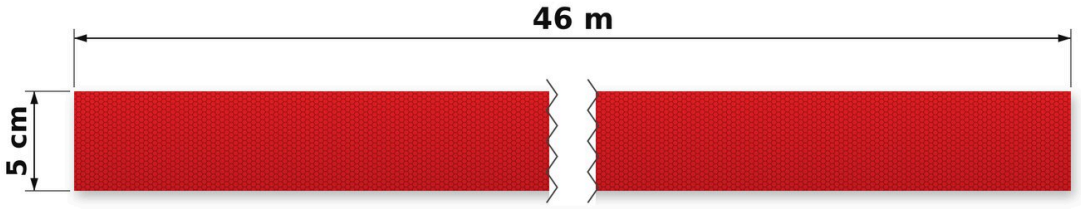

lățimea benzii la scară, lungimea întreruptă
tape width to scale, length broken

ATO 8407 dimensions

Drawings and details · 2/3

Aplicare
Application

ATO 8407

Model
Design

Fagure, celule hexagonale

Honeycomb, hexagonal cells

Adeziv
Adhesive

Agresiv, sensibil la presiune

Aggressive, pressure-sensitive

Temperatura de aplicare
Application temperature

10-30 °C, suprafața și aerul

10-30 °C, surface and air

Suprafață
Surface

Plană, curată, uscată și neruginită, fără nituri

Flat, clean, dry and rust-free, without rivets

Rezistență
Resistance

La delaminare, decolorare și exfoliere

To delamination, fading and peeling

Vehicule
Vehicles

Camioane, remorci, semiremorci, autobuze, rulote, autocisterne, vehicule de pompieri și de salvare


Trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles

ATO 8407 application

Drawings and details · 3/3

Utilizare: în spate
Use: on the rear

ATO 8407

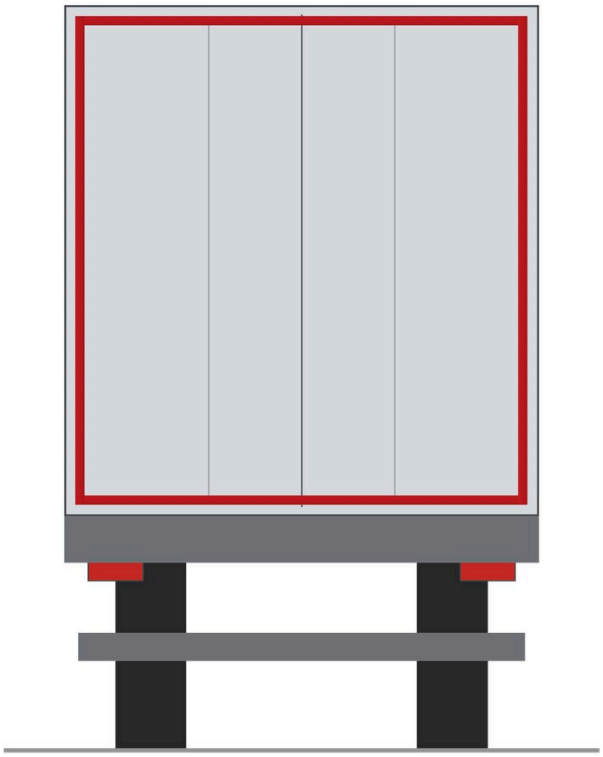

vedere din spate / rear view

Vehicule: camioane, remorci, semiremorci, autobuze, rulote, autocisterne, vehicule de pompieri și de salvare.
Vehicles: trucks, trailers, semi-trailers, buses, caravans, tankers, fire and rescue vehicles.

Pentru marcajul de contur obligatoriu se folosește banda omologată ECE 104 (ATO 8413, 8414, 8415).
The mandatory contour marking takes the ECE 104 approved tape (ATO 8413, 8414, 8415).

Where ATO 8407 is used