PPC Speed Bump End Cap (ATZ 50500), 20×50×4.5 cm

ECONOMIC | Signs compliant with SR 1848-1:2024



AT A GLANCE

- End cap for the ATZ 50500 speed bump.
- PPC, 20 × 50 × 4.5 cm, 0.9 kg; black or yellow.
- 2 anchors and 2 bolts included.

Product code	**ATZ 50501**
Category	**Speed Bumps**
Brand	**Atto Trafic**
Weight	**0.9 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/capac-limitator-de-viteza-din-ppc-atz-50500-20x50x4-5-cm

Technical specifications

Material	PPC
Color	Black / Yellow
Installation	2 Dowels, 2 Screws

Description

It closes a row of ATZ 50500 bumps with a piece 20 cm long, 50 cm in the direction of travel and 4.5 cm high, matching the bump. It weighs 0.9 kg and is also made of PPC.

Why you need it

The end of a row without a cap is a 4.5 cm step. The cap turns it into a rounded edge that wheels leaving the row, or bicycles riding along the kerb, cross without a jolt.

Fitting

- it slots into the last bump in the row;
- it is fixed with 2 anchors and 2 bolts, included;
- one at each end.

Colours

Sold per piece, black or yellow, like the bump. Choose the opposite colour to the last bump so the alternation carries on to the kerb.


Example

For a 4.4 m car park entrance: 8 ATZ 50500 bumps (4 m) and 2 ATZ 50501 caps (40 cm).

Drawings and details · 1/3

Dimensiuni: 20 x 50 x 4,5 cm
Dimensions: 20 x 50 x 4.5 cm

ATZ 50501

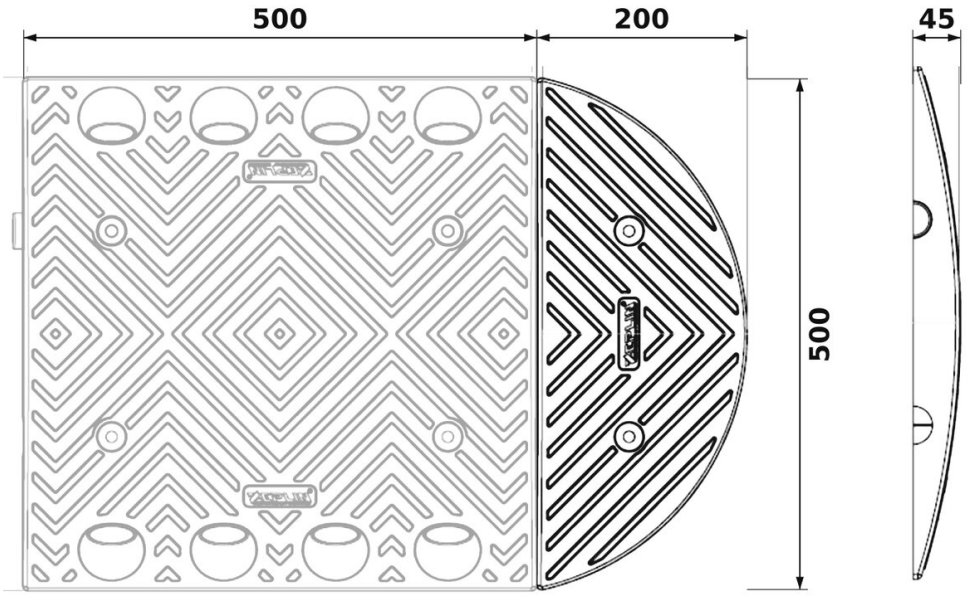

Dimensiuni în mm. PPC, negru sau galben; 0,9 kg; 2 dibluri + 2 șuruburi incluse.
Dimensions in mm. PPC, black or yellow; 0.9 kg; 2 dowels + 2 screws included.
Rezistă între -20 °C și +60 °C. Se pune câte un capac la fiecare capăt al rândului.
Withstands -20 °C to +60 °C. One end cap goes at each end of the row.

ATZ 50501 dimensions

Drawings and details · 2/3

Cum se montează un rând, alternat negru și galben

ATZ 50501

How a row goes together, alternating black and yellow





capacele ATZ 50501, negru sau galben / the ATZ 50501 end caps, black or yellow

Se vinde pe bucată. 2 limitatoare pe metru; în rând se pun alternat, iar la capete câte un capac.
Sold per piece. 2 bumps per metre; laid alternately in a row, with an end cap at each end.
Pentru 3 m: 6 x ATZ 50500 + 2 x ATZ 50501; cu tot cu capace, rândul are 3,4 m.
For 3 m: 6 x ATZ 50500 + 2 x ATZ 50501; with the end caps the row is 3.4 m long.

ATZ 50501: how it is fitted

Drawings and details · 3/3


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




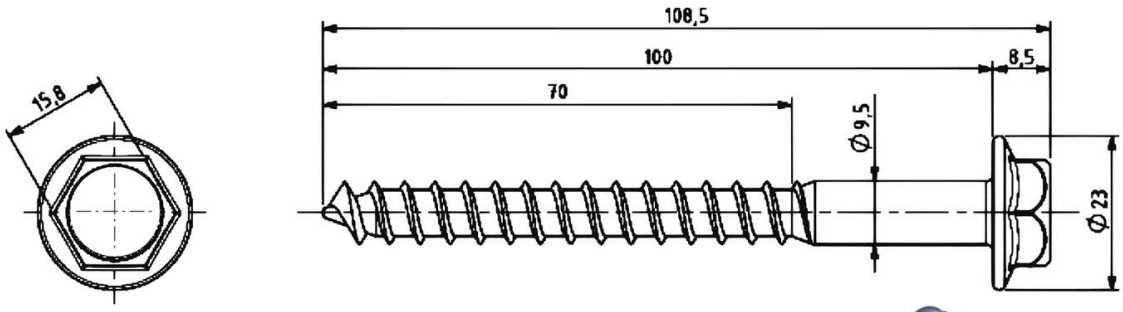



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

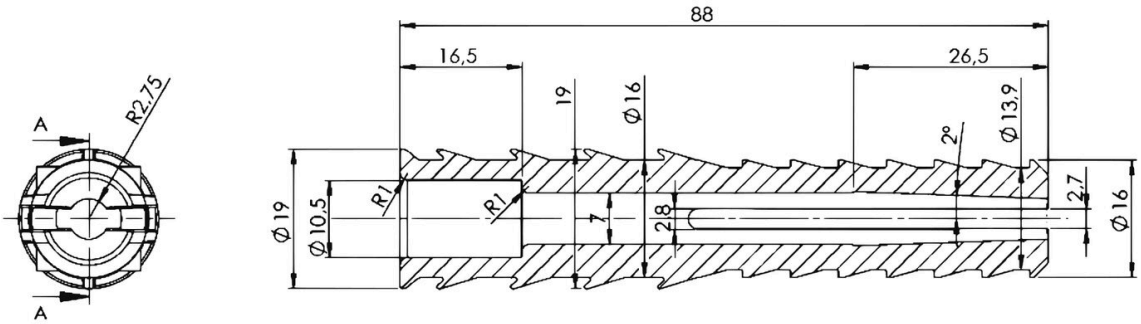

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

ATZ 50501 fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel