Speed Bump End Cap (V19-400), 25×40×4.5 cm

Signs compliant with SR 1848-1:2024

AT A GLANCE

- End cap for the V19-400 speed bump.
- Black rubber, 25 × 40 × 4.5 cm, 1.7 kg.
- Rounded edge, facing the kerb.
- 2 anchors and 2 bolts included.

Product code	**V19-401**
Category	**Speed Bumps**
Weight	**1.7 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/capac-limitator-de-viteza-v19-400-25x40x4-5-cm

Technical specifications

Material	Rubber
Color	Black
Installation	2 Dowels, 2 Screws

Description

A row of speed bumps should not stop at a square edge. At each end goes a cap like this one: a half-round rubber piece that slopes down to the asphalt and finishes the row neatly against the kerb.

Fit

It is 40 cm in the direction of travel and 4.5 cm high, exactly like the V19-400 bump, and attaches to it by the same side key. The cap is 25 cm long.

How many you need

Two per row, one at each end. For 3 m of bumps, for example, take 6 V19-400 pieces and 2 caps; with the caps the row is 3.5 m long.

Fitting

It weighs 1.7 kg and is fixed with 2 anchors and 2 bolts supplied in the box. Drill the holes once the whole row is laid out, so it comes out straight.

Other sizes

The matching cap for the V19-500 is the V19-501, and for the V19-600 the V19-601. Caps do not fit across models, because the widths differ.

Drawings and details · 1/3

Dimensiuni: 25 x 40 x 4,5 cm
Dimensions: 25 x 40 x 4.5 cm

V19-401

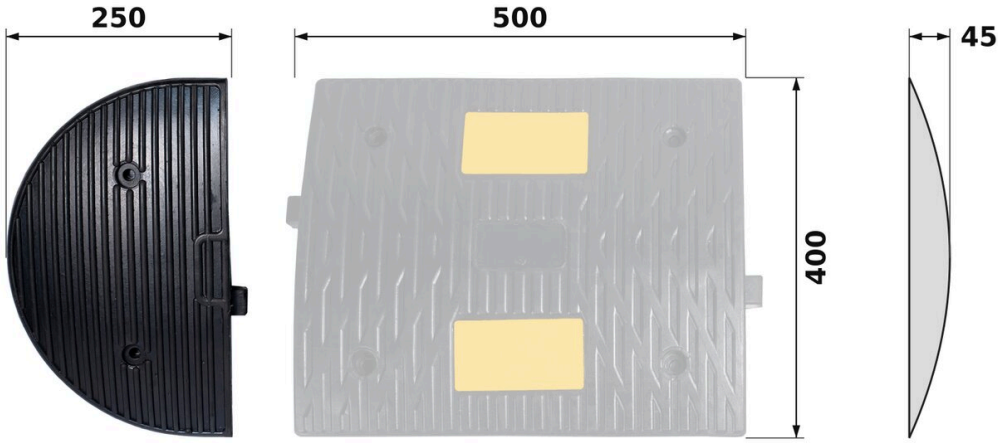

V19-401 | **V19-400** | **profil** profile

Dimensiuni în mm. Cauciuc negru, 1,7 kg; 2 dibluri + 2 șuruburi incluse.
Dimensions in mm. Black rubber, 1.7 kg; 2 dowels + 2 screws included.
Profilul este orientativ. Se pune câte un capac la fiecare capăt al rândului.
The profile is indicative. One end cap goes at each end of the row.

V19-401 dimensions

Drawings and details · 2/3

Cum se montează un rând

V19-401

How a row goes together

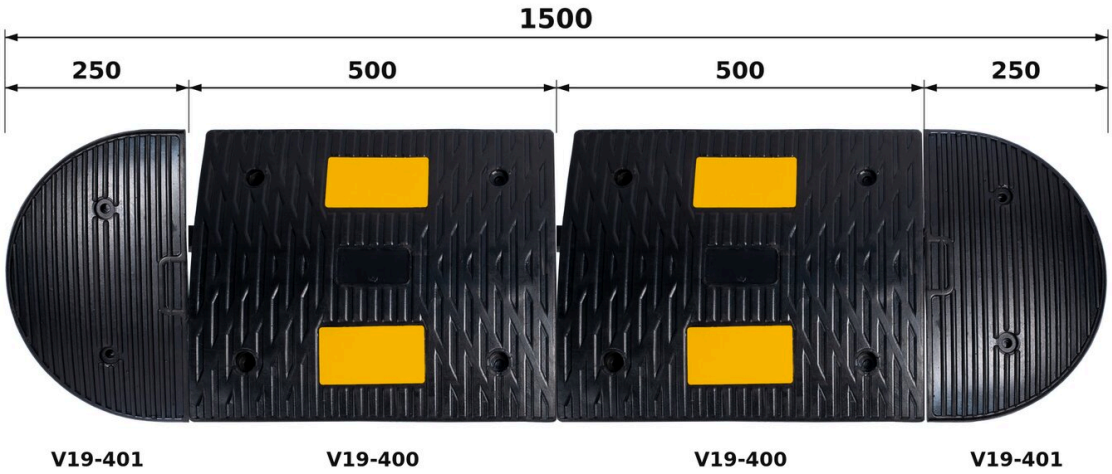

Dimensiuni în mm. 2 limitatoare pe metru; câte un capac la fiecare capăt. Piesele se îmbină prin cheile de pe laterale.

Dimensions in mm. 2 bumps per metre; one end cap at each end. The pieces join through the keys on their sides.

Pentru 3 m: 6 x V19-400 + 2 x V19-401; cu tot cu capace, rândul are 3,5 m.

For 3 m: 6 x V19-400 + 2 x V19-401; with the end caps the row is 3.5 m long.

V19-401: how it is fitted

Drawings and details · 3/3

Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head

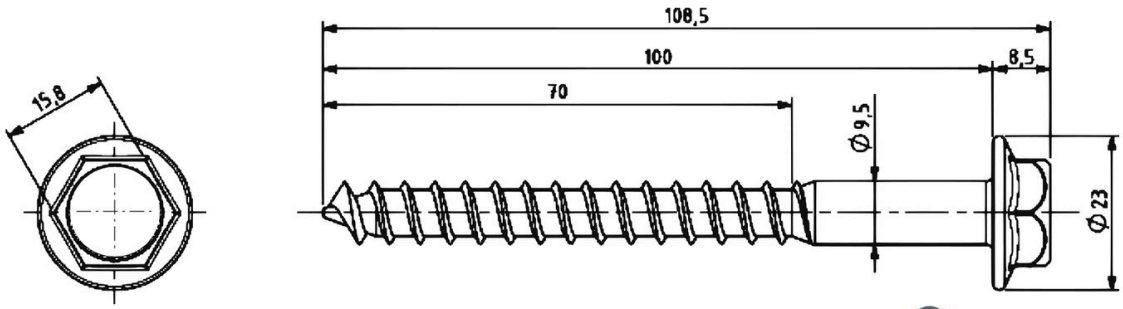

ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

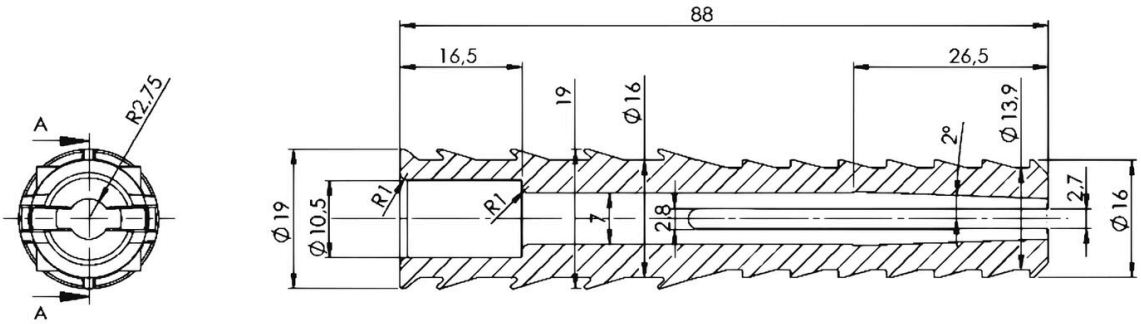

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

V19-401 fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel