Speed Bump End Cap (V19-500), 25×50×4 cm

Signs compliant with SR 1848-1:2024



AT A GLANCE

- End cap for the V19-500 speed bump.
- Black rubber, 25 × 50 × 4 cm, 3 kg.
- 2 anchors and 2 bolts included.

Product code	**V19-501**
Category	**Speed Bumps**
Weight	**3 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/capac-limitator-de-viteza-v19-500-25x50x4-cm

Technical specifications

Material	Rubber
Color	Black
Installation	2 Dowels, 2 Screws

Description

The ends of a row of speed bumps are where bicycles, motorbikes and wheels cutting the corner cross most often. This cap finishes the row with a half-round edge that slopes gradually down to the asphalt.

Dimensions

It is 50 cm in the direction of travel, like the V19-500, and 4 cm high. It is 25 cm long and weighs 3 kg.

How it attaches

It locks to the last bump in the row by the side key and is fixed into asphalt or concrete with 2 anchors and 2 bolts, which are included.

Example order

For 4 m of bumps: 8 V19-500 pieces and 2 V19-501 caps, one at each end. With the caps the row is 4.5 m long, so it fits an entrance 4.5 m between kerbs.


Mind the model

The cap fits the V19-500 only. For the 40 cm bump you need the V19-401, and for the 60 cm one the V19-601.

Drawings and details · 1/3

Dimensiuni: 25 x 50 x 4 cm
Dimensions: 25 x 50 x 4 cm

V19-501

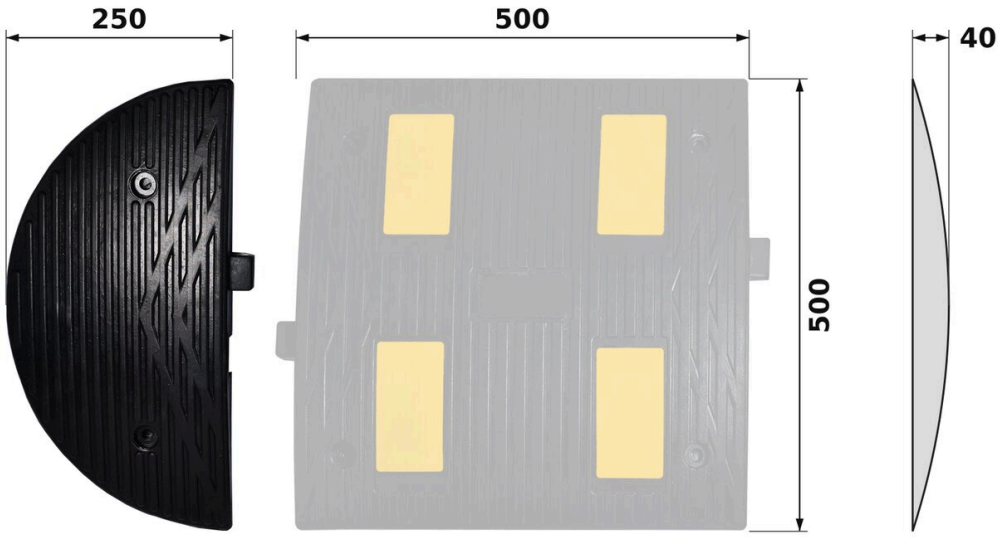

V19-501 **V19-500** **profil**
profile

Dimensiuni în mm. Cauciuc negru, 3 kg; 2 dibluri + 2 șuruburi incluse.
Dimensions in mm. Black rubber, 3 kg; 2 dowels + 2 screws included.
Profilul este orientativ. Se pune câte un capac la fiecare capăt al rândului.
The profile is indicative. One end cap goes at each end of the row.


V19-501 dimensions

Drawings and details · 2/3

Cum se montează un rând

How a row goes together

V19-501

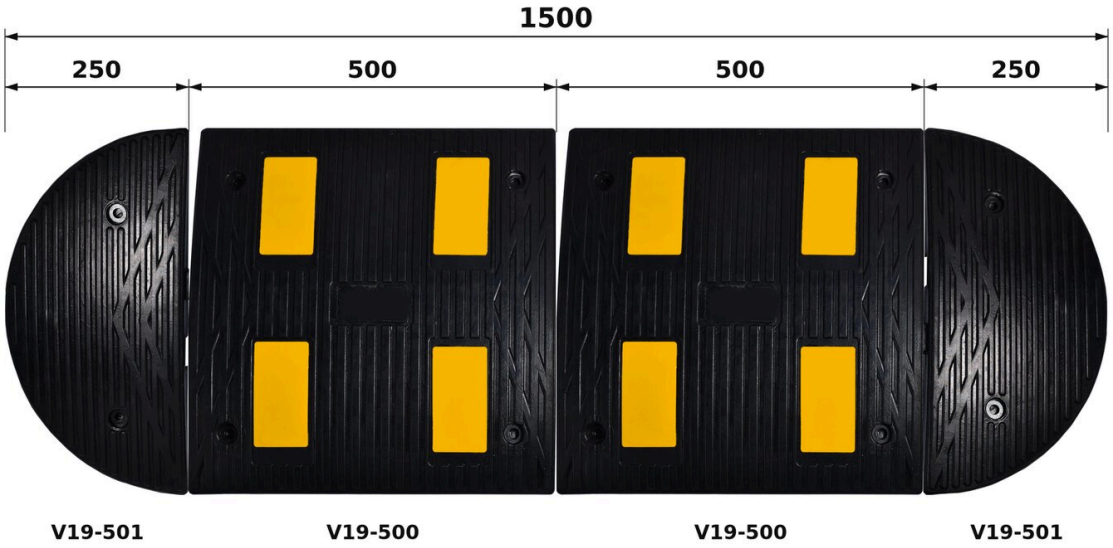

Dimensiuni în mm. 2 limitatoare pe metru; câte un capac la fiecare capăt. Piesele se îmbină prin cheile de pe laterale.

Dimensions in mm. 2 bumps per metre; one end cap at each end. The pieces join through the keys on their sides.

Pentru 3 m: 6 x V19-500 + 2 x V19-501; cu tot cu capace, rândul are 3,5 m.

For 3 m: 6 x V19-500 + 2 x V19-501; with the end caps the row is 3.5 m long.

V19-501: how it is fitted

Drawings and details · 3/3


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




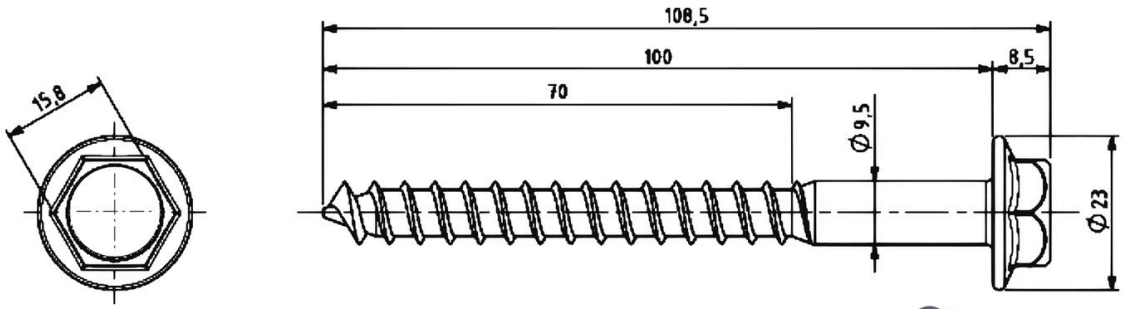



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

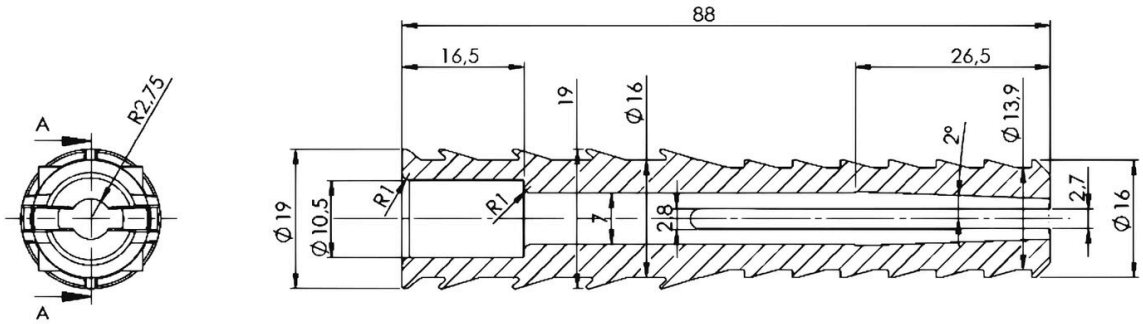

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

V19-501 fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel