Speed Bump End Cap (V19-600), 30×60×4.5 cm

Signs compliant with SR 1848-1:2024



AT A GLANCE

- End cap for the V19-600 speed bump.
- Black rubber, 30 × 60 × 4.5 cm, 4.6 kg.
- 3 anchors and 3 bolts included.

Product code	**V19-601**
Category	**Speed Bumps**
Weight	**4.6 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/capac-limitator-de-viteza-v19-600-30x60x4-5-cm

Technical specifications

Material	Rubber
Color	Black
Installation	3 Dowels, 3 Screws

Description

The V19-600 is 60 cm in the direction of travel, so its cap is also larger than those for the V19-400 and V19-500: 30 cm long, 60 cm in the direction of travel and 4.6 kg. That is why it fixes at 3 points instead of 2.

What it does

It closes the row of bumps at the edge of the road. Its rounded edge slopes down to the asphalt, so a bicycle wheel or a car cutting the corner does not hit a step.

Fitting

- it locks to the last bump by the side key;
- it is fixed with 3 anchors and 3 bolts, included;
- one goes at each end of the row.

How to count

Count the bumps (2 per metre) and add 2 caps. For 3 m of bumps you have 6 V19-600 pieces and 2 V19-601 caps; the complete row is 3.6 m long.


Compatibility

It fits the V19-600 only. The ATZ 45600, also 60 cm wide, is a different model with its own cap, the ATZ 45601.

Drawings and details · 1/3

Dimensiuni: 30 x 60 x 4,5 cm
Dimensions: 30 x 60 x 4.5 cm

V19-601

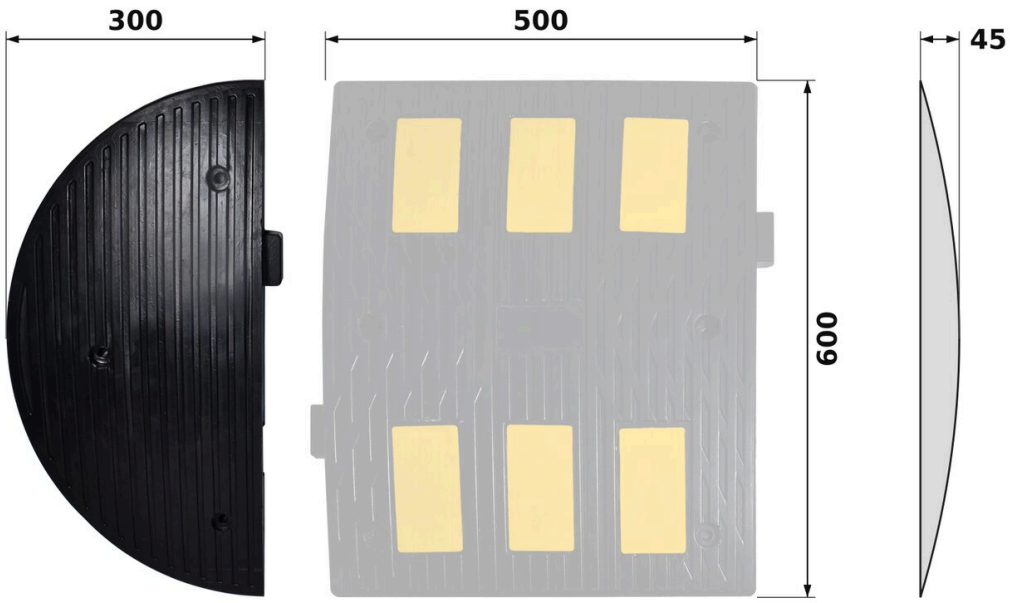

Dimensiuni în mm. Cauciuc negru, 4,6 kg; 3 dibluri + 3 șuruburi incluse.
Dimensions in mm. Black rubber, 4.6 kg; 3 dowels + 3 screws included.
Profilul este orientativ. Se pune câte un capac la fiecare capăt al rândului.
The profile is indicative. One end cap goes at each end of the row.


V19-601 dimensions

Drawings and details · 2/3

Cum se montează un rând

V19-601

How a row goes together

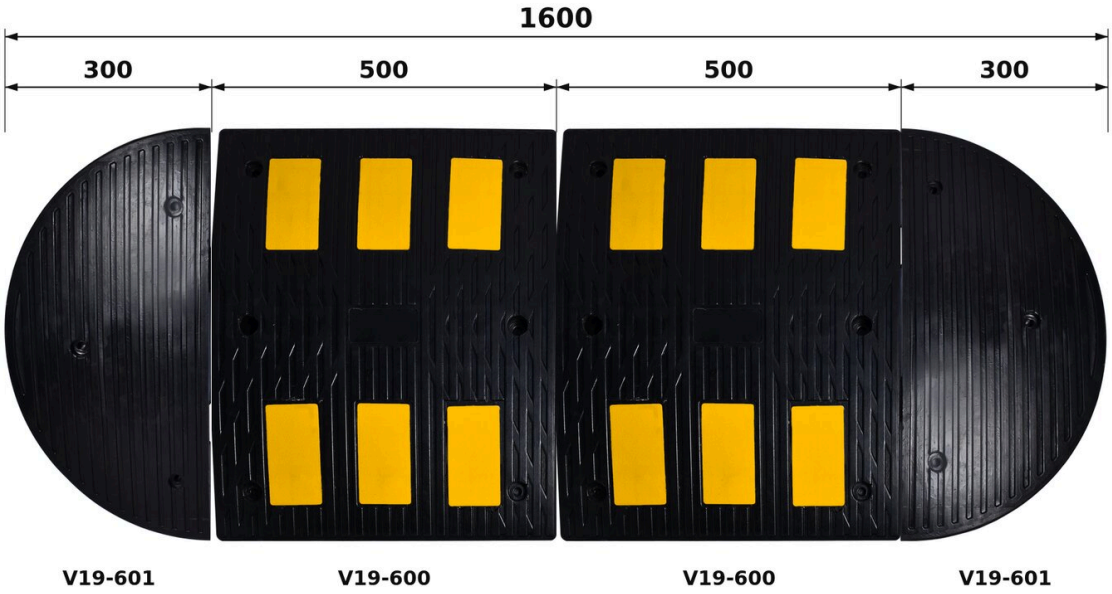

Dimensiuni în mm. 2 limitatoare pe metru; câte un capac la fiecare capăt. Piesele se îmbină prin cheile de pe laterale.

Dimensions in mm. 2 bumps per metre; one end cap at each end. The pieces join through the keys on their sides.

Pentru 3 m: 6 x V19-600 + 2 x V19-601; cu tot cu capace, rândul are 3,6 m.

For 3 m: 6 x V19-600 + 2 x V19-601; with the end caps the row is 3.6 m long.

V19-601: how it is fitted

Drawings and details · 3/3


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




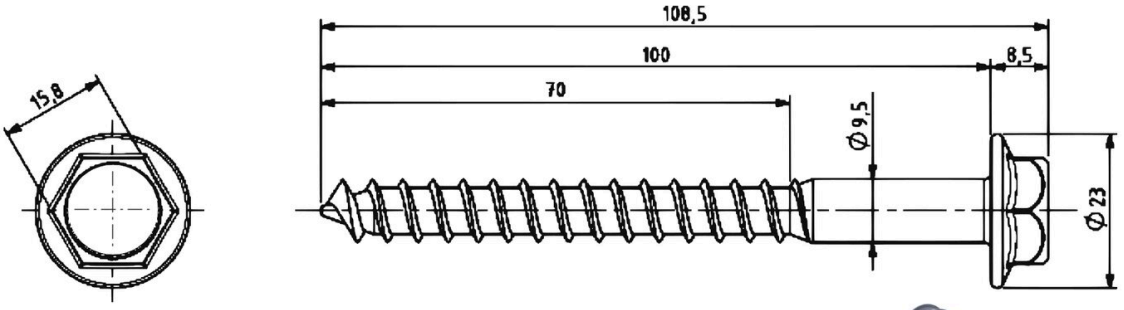



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

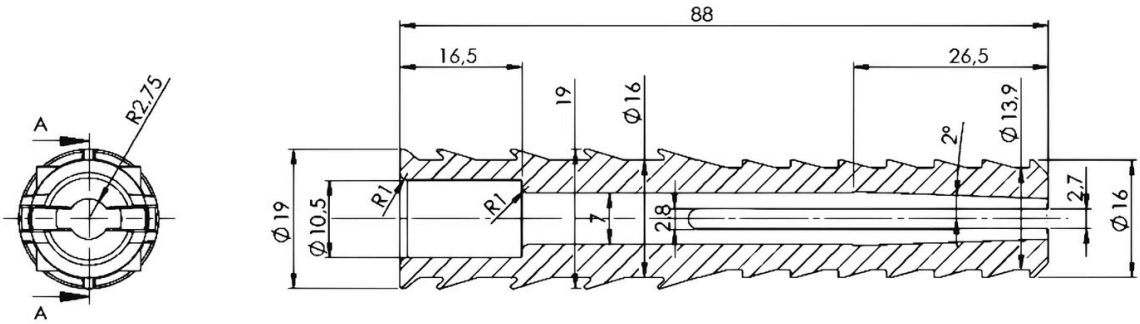

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

V19-601 fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel