# D5 Mandatory Sign – Pass on the Left, Ø40 cm, Class I

Class I (EGP) Road Signs | Signs compliant with SR 1848-1:2024



## AT A GLANCE

- Mandatory sign D5 “Pass on the Left”, to SR 1848-1:2024.
- 40 cm diameter disc, small format, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 2 clamps for Ø48 mm posts, with bolts and nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

| | |
|---|---|
| Product code | **D5b_40_I** |
| Category | **Non-STAS** |
| Weight | **2 kg** |
| Compliance | **Class I (EGP) Road Signs** |
| Compliance | **Signs compliant with SR 1848-1:2024** |

This product on attotrafic.ro
**https://attotrafic.ro/en_US/products/d5-ocolire-prin-stanga-o40-cm-clasa-i**

## Technical specifications

| | |
|---|---|
| **SR 1848-1 code** | D5 |
| **Name in the standard** | Pass on this side |
| **Type** | Mandatory road sign |
| **Shape and colours** | Blue disc with a white arrow pointing down to the left |
| **Size** | 40 cm diameter |
| **Format (SR 1848-2)** | Small |
| **Material** | Galvanised steel sheet, 1 mm |
| **Construction** | Pressed edges, no sharp edges |
| **Painting** | Electrostatic, UV-resistant paint |

| | |
|---|---|
| **Retroreflective sheeting** | Class I (RA1), UV-resistant |
| **Retroreflection (white, 0.2°/5°)** | 70 cd/(lx·m²) |
| **Sheeting service life** | 7 years |
| **Weight** | 2 kg |
| **Fixings included** | 2 clamps, with bolts and nuts |
| **Post diameter** | Ø48 mm (Ø60 mm on request) |
| **Standards** | SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011, SR 1848-3:2011 |
| **Marking** | CE |

## Description

The D5 tells drivers which side to pass an obstacle on: the white arrow, pointing down at an angle, shows that they must keep to the left. It is seen at the ends of traffic islands and channelling islands. This version is Ø40 cm, the small format in SR 1848-2, intended for low-traffic minor roads.

### When class I is used

Class I (RA1) sheeting returns 70 cd/(lx·m²) for white to the driver and has a 7-year service life, enough on roads where headlights are the only light: local, minor and private roads or quiet streets. In areas with street lighting, shop windows, advertising and dense urban traffic, however, SR 1848-2 requires prismatic class 2 or 3 sheeting. The class II version is the D5b_II (Ø80 cm).

### Where it goes, under SR 1848-1:2024

It goes at the ends of traffic islands, channelling islands and central reserves, or before another obstacle on the road, where vehicles must pass it on the left. Where there is no room for a sign of ordinary size, for example at tram-stop islands or at the ends of a double safety barrier between carriageways, small signs can be used.

As a general rule for mandatory signs, the obligation applies in the immediate vicinity of the sign, before or after the place where it stands, as the case may be.

### Technical data

- 40 cm diameter disc (small format, SR 1848-2): blue with a white arrow pointing down to the left;
- 1 mm galvanised steel sheet, with pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- weight: 2 kg;
- fixings included: 2 clamps for Ø48 mm posts, with bolts and nuts;
- CE marked; compliant with SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011 and SR 1848-3:2011.

### Mounting and size

Fixings for the post are included: 2 clamps for Ø48 mm posts, with bolts and nuts; clamps for Ø60 mm posts are available on request. The bottom edge of the sign goes 1.50–2.50 m above the road or kerb, and the edge nearest the road 0.50–2.0 m from the road platform. The sign must be visible from at least 50 m in built-up areas and 100 m outside them.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. For temporary use, with no foundation: the Ø48 mm tripod post, 120 cm. On concrete or paving, where you cannot dig: the Ø60 mm flange post, 300 cm, bolted down; for it, ask for the Ø60 mm clamps when you order.


The 40 cm diameter is the small format in SR 1848-2, meant for low-traffic minor roads and for short-term police signing at accident scenes. County and local roads, streets and private roads open to public traffic call for the normal Ø60 cm format: the D5b. In car parks and private premises closed to public traffic the standard is not mandatory, so the small format is enough there.

## Drawings and details · 1/3

# D5 – Ocolire

Pass on this side

Ø40 cm · dimensiunile feței indicatorului
Ø40 cm · sign face dimensions

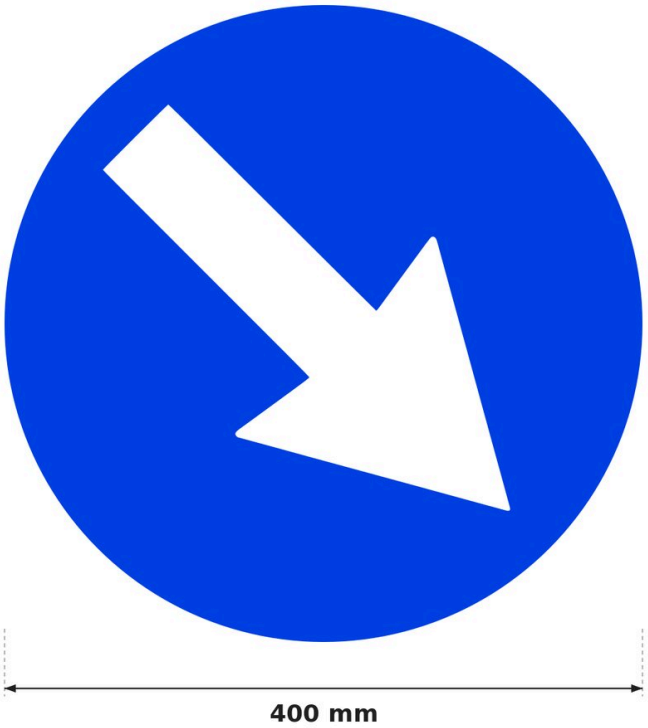


**Dimensiuni SR 1848-2 (mm)**
SR 1848-2 dimensions (mm)

**Ø40 cm**
D = 400
drumuri vicinale cu trafic redus
low-traffic local access roads

**Ø60 cm**
D = 600
drumuri județene, comunale, străzi
county and communal roads, streets

**Ø80 cm**
D = 800
drumuri naționale
national roads

**Ø100 cm**
D = 1000
autostrăzi
motorways

Fond albastru, simbol alb; cotele sunt ale feței retroreflectorizante.
Blue background, white symbol; dimensions of the retroreflective face.


Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).

Formatul se alege după categoria drumului (SR 1848-2, 5.2).
The format follows the road category (SR 1848-2, 5.2).

D5a: ocolire prin dreapta; D5b: ocolire prin stânga.
D5a: pass on the right; D5b: pass on the left.

Sursa: SR 1848-2:2011, tab. 3.
Source: SR 1848-2:2011, table 3.


## Drawings and details · 2/3

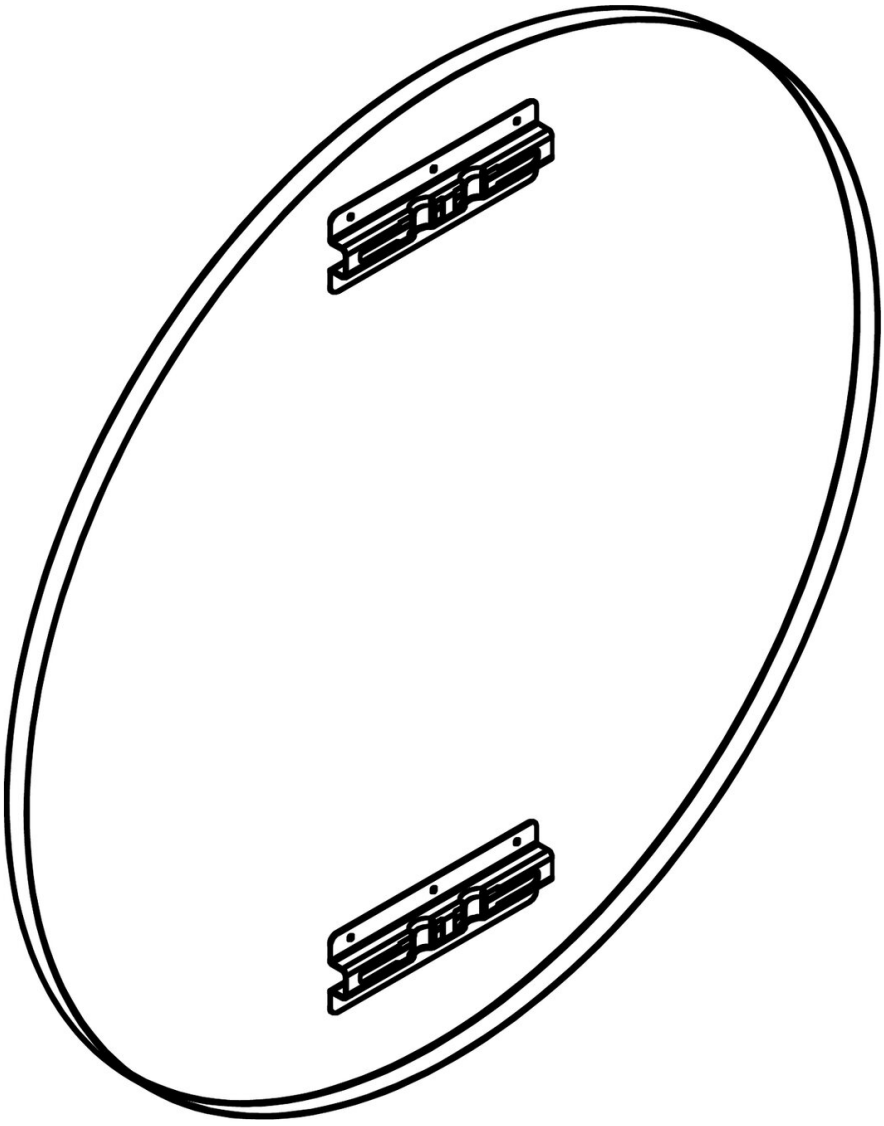

## Drawings and details · 3/3

# Prindere cu canal și colier, stâlp Ø48 mm

Channel and clamp fixing, Ø48 mm post

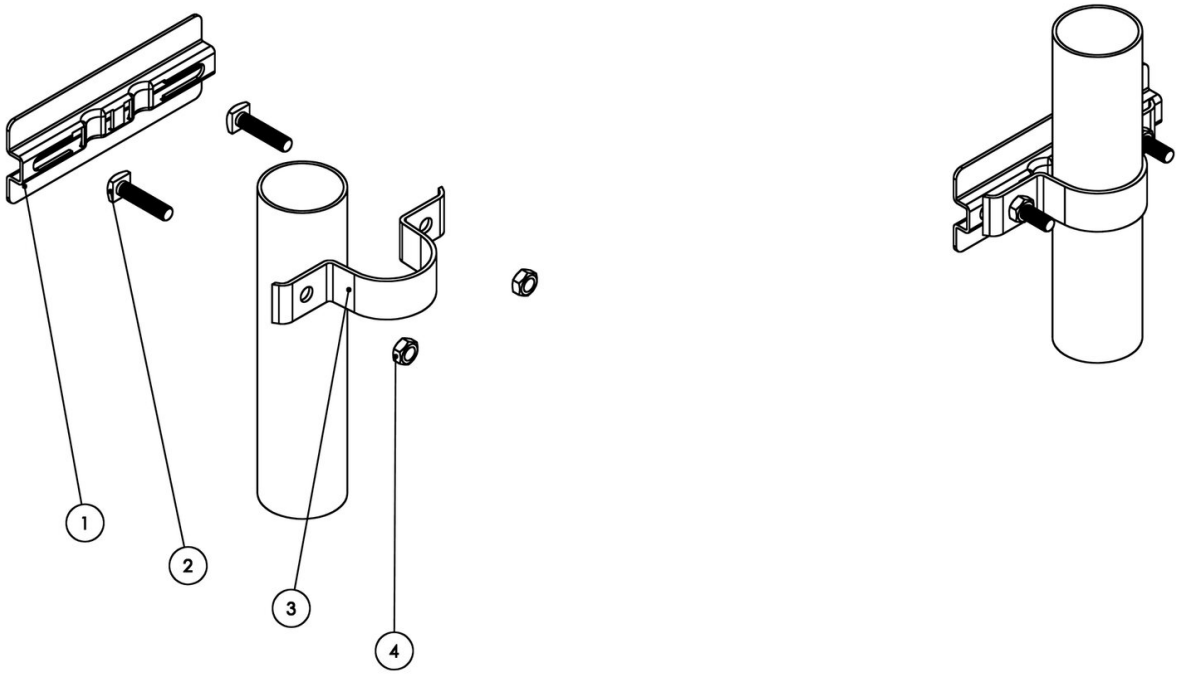


**1** Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

**2** Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

**3** Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

**4** Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.