F17b Direction Sign – Lorry Route, Left, 65×85 cm, Class I

Class I (EGP) Road Signs | Signs compliant with SR 1848-1:2024

AT A GLANCE

- Direction sign F17b "Lorry Route, Left", to SR 1848-1:2024.
- Blue rectangle, 65 × 85 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**F17b**
Category	**Metal Road Signs**
Weight	**5 kg**
Compliance	**Class I (EGP) Road Signs**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/f17b-traseu-de-urmat-pentru-autocamioane-la-stanga-65×85-cm-clasa-i

Technical specifications

SR 1848-1 code	F17b
Name in the standard	Route for specified vehicle categories
Type	Direction road sign
Shape and colours	Blue rectangle with the white outline of a lorry and a white arrow curving to the left
Size	65 × 85 cm
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant
Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)

Sheeting service life	7 years
Weight	5 kg
Fixings included	2 clamps, 4 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011, SR 1848-3:2011
Marking	CE

Description

The F17b shows lorry drivers the route to follow to avoid a weight restriction: the lorry outline above a white arrow curving to the left.

When class I is used

Class I (RA1) sheeting returns 70 cd/(lx·m²) for white to the driver and has a 7-year service life, enough on roads where headlights are the only light: local, minor and private roads or quiet streets. In areas with street lighting, shop windows, advertising and dense urban traffic, however, SR 1848-2 requires prismatic class 2 or 3 sheeting.

Where it goes, under SR 1848-1:2024

It goes 30–200 m from the point where vehicles of the category shown, with a total mass or axle load above the value on the sign, are diverted, and is completed, as the site requires, with the C18.

Like all direction signs in SR 1848-1:2024, it has a blue background, used for public roads other than motorways, with white symbols; on motorways the background is green.

Technical data

- 65 × 85 cm panel: blue rectangle with the white outline of a lorry and a white arrow curving to the left;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- weight: 5 kg;
- fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts;
- CE marked; compliant with SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011 and SR 1848-3:2011.

Mounting and size

Fixings for the post are included: 2 clamps for Ø48 mm posts and 4 bolts with nuts; clamps for Ø60 mm posts are available on request. The bottom edge of the sign goes 1.50–2.50 m above the road or kerb, and the edge nearest the road 0.50–2.0 m from the road platform. The sign must be visible from at least 50 m in built-up areas and 100 m outside them.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. For temporary use, with no foundation: the Ø48 mm tripod post, 120 cm. On concrete or paving, where you cannot dig: the Ø60 mm flange post, 300 cm, bolted down; for it, ask for the Ø60 mm clamps when you order.

The panel measures 65 × 85 cm.

Drawings and details · 1/3

F17b – Traseu de urmat pentru anumite categorii de vehicule

Route for specified vehicle categories

65 x 85 cm · dimensiunile feței indicatorului

65 x 85 cm · sign face dimensions

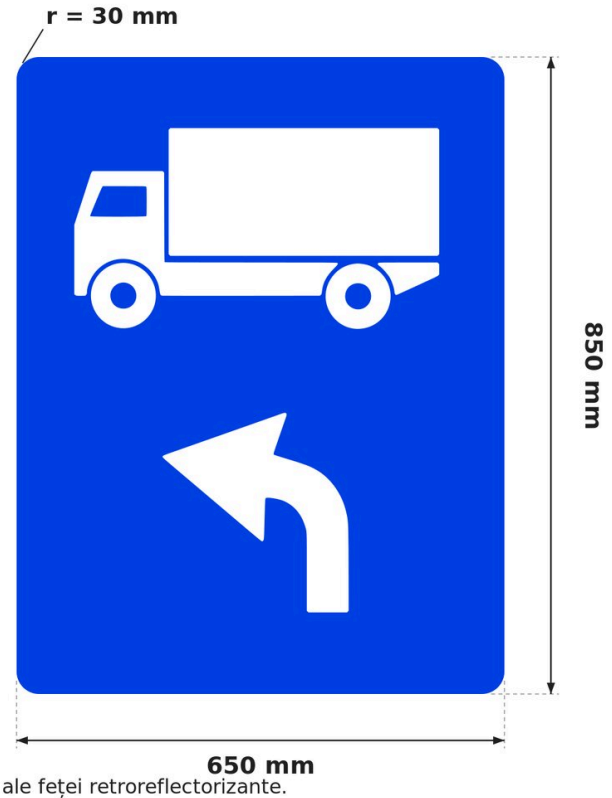

Dimensiuni SR 1848-2 (mm)
SR 1848-2 dimensions (mm)

65 x 85 cm
650 x 850 · r = 30
toate drumurile
all roads

Cotele sunt ale feței retroreflectorizante.
Dimensions of the retroreflective face.

Categoria de vehicule (și masa) se alege la comandă; imaginea arată exemplul.
The vehicle category (and mass) is made to order; the picture shows the example.

Săgețile și liniile nu sunt cotate în SR 1848-2; s-au luat de pe desen.
Arrows and lines are not dimensioned in SR 1848-2; taken from the drawing.

Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).

Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).
Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).

Sursa: SR 1848-2:2011, tab. 9.
Source: SR 1848-2:2011, table 9.

Drawings and details · 2/3

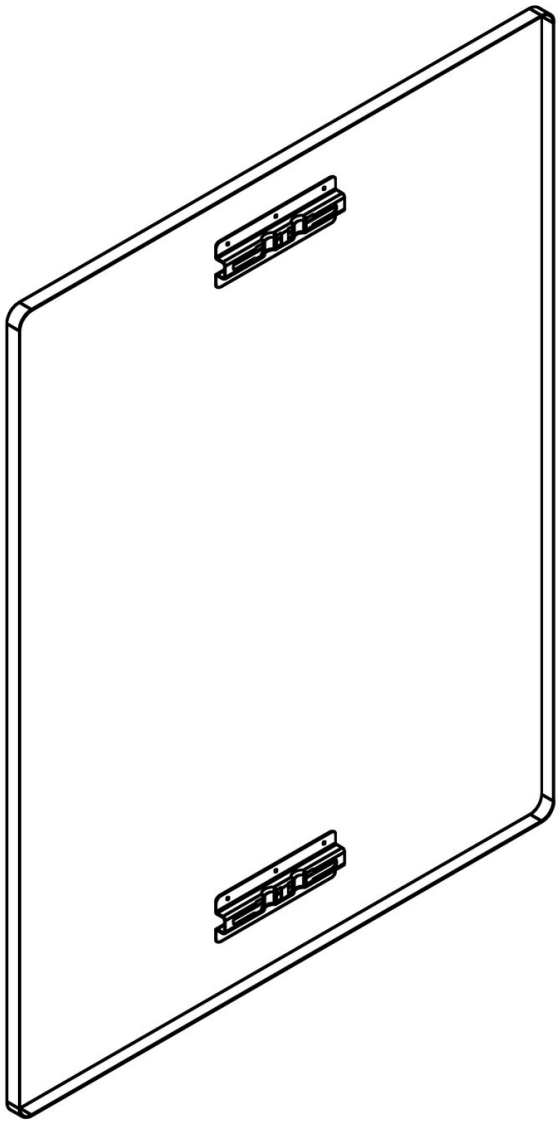

Drawings and details · 3/3

Prindere cu canal și colier, stâlp Ø48 mm

Channel and clamp fixing, Ø48 mm post

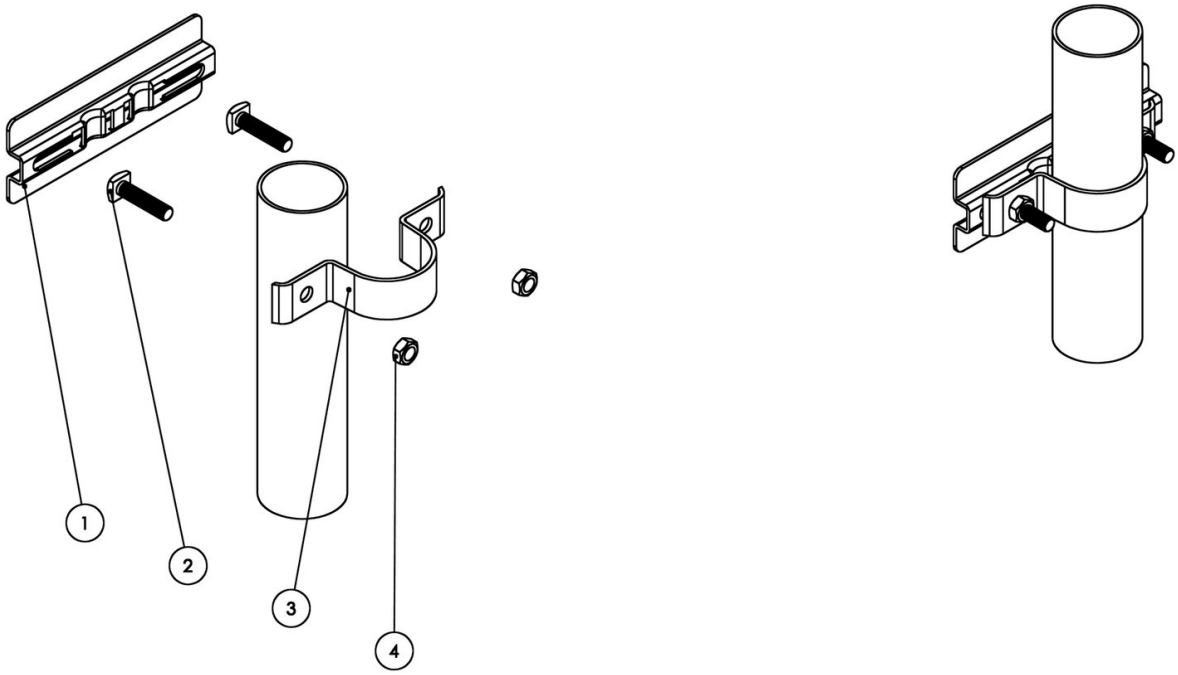

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.