


F23 Direction Sign – Right Lane Ends, 50×65 cm, Class I

Class I (EGP) Road Signs

Signs compliant with SR 1848-1:2024

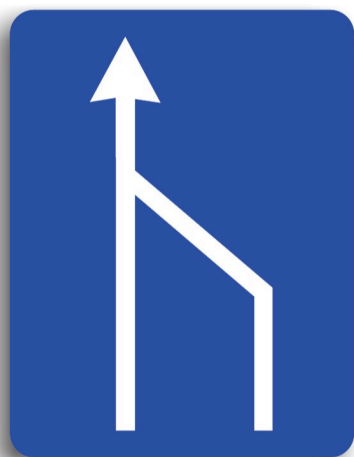

AT A GLANCE

- Direction sign F23 "Right Lane Ends", to SR 1848-1:2024.
- Blue rectangle, 50 × 65 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code **F23**

Category **Metal Road Signs**

Weight **3.2 kg**

Compliance **Class I (EGP) Road Signs**

Compliance **Signs compliant with SR 1848-1:2024**



This product on attotrafic.ro

https://attotrafic.ro/en_US/products/f23-terminare-a-benzii-din-dreapta-50x65-cm-clasa-i

Technical specifications

SR 1848-1 code	F23
Name in the standard	End of the right-hand traffic lane
Type	Direction road sign
Shape and colours	Blue rectangle with a white diagram of two lanes, the right one ending
Size	50 × 65 cm
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant
Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)

Sheeting service life	7 years
Weight	3.2 kg
Fixings included	2 clamps, 4 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011, SR 1848-3:2011
Marking	CE

Description

The F23 warns that the right-hand lane is ending and drivers on it must merge into the next lane: a two-lane diagram with the right lane closing to the left.

When class I is used

The sign has class I (RA1) retroreflective sheeting: 70 cd/(lx·m²) for white and a 7-year service life. It is the economical choice for places without many light sources, such as local, minor and private roads or streets without strong lighting. Where there is street lighting, shop windows or advertising, SR 1848-2 requires prismatic class 2 or 3 sheeting, which stands out better against a lit background.

Where it goes, under SR 1848-1:2024

It goes 50–150 m before the end of one of the road's lanes. It is also used on acceleration lanes at junctions. The layout on the sign is made to match the actual road or junction.

SR 1848-1:2024 ties the background colour to the type of road: green on motorways, blue on other public roads, white for local destinations and brown for tourist ones.

Technical data

- 50 × 65 cm panel: blue rectangle with a white diagram of two lanes, the right one ending;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- weight: 3.2 kg;
- fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts;
- CE marked; compliant with SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011 and SR 1848-3:2011.

Mounting and size

Fixings for the post are included: 2 clamps for Ø48 mm posts and 4 bolts with nuts; clamps for Ø60 mm posts are available on request. The bottom edge of the sign goes 1.50–2.50 m above the road or kerb, and the edge nearest the road 0.50–2.0 m from the road platform. The sign must be visible from at least 50 m in built-up areas and 100 m outside them.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. For temporary use, with no foundation: the Ø48 mm tripod post, 120 cm. On concrete or paving, where you cannot dig: the Ø60 mm flange post, 300 cm, bolted down; for it, ask for the Ø60 mm clamps when you order.

The panel measures 50 × 65 cm.