


## G12 Information Sign – Pedestrian Footbridge, 50×65 cm, Class I

Class I (EGP) Road Signs

Signs compliant with SR 1848-1:2024

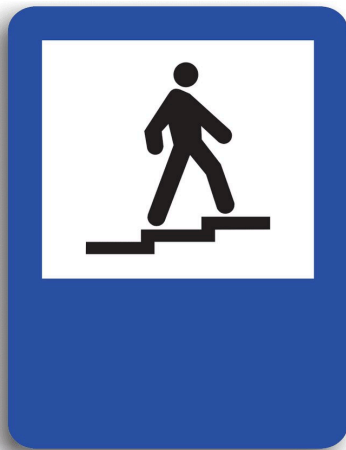

### AT A GLANCE

- Information sign G12 "Pedestrian Footbridge", to SR 1848-1:2024.
- Blue rectangle, 50 × 65 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

|              |                                            |
|--------------|--------------------------------------------|
| Product code | <b>G12</b>                                 |
| Category     | <b>Metal Road Signs</b>                    |
| Weight       | <b>3.2 kg</b>                              |
| Compliance   | <b>Class I (EGP) Road Signs</b>            |
| Compliance   | <b>Signs compliant with SR 1848-1:2024</b> |



This product on [attotrafic.ro](https://attotrafic.ro/en_US/products/g12-pasarela-pentru-pietoni-50x65-cm-clasa-i)  
[https://attotrafic.ro/en\\_US/products/g12-pasarela-pentru-pietoni-50x65-cm-clasa-i](https://attotrafic.ro/en_US/products/g12-pasarela-pentru-pietoni-50x65-cm-clasa-i)

### Technical specifications

|                      |                                                                       |
|----------------------|-----------------------------------------------------------------------|
| SR 1848-1 code       | G12                                                                   |
| Name in the standard | Pedestrian footbridge                                                 |
| Type                 | Information road sign                                                 |
| Shape and colours    | Blue rectangle with a white field showing a pedestrian climbing steps |
| Size                 | 50 × 65 cm                                                            |
| White field          | 40 × 35 cm                                                            |
| Material             | Galvanised steel sheet, 1 mm                                          |
| Construction         | Rounded corners, pressed edges, no sharp edges                        |
| Painting             | Electrostatic, UV-resistant paint                                     |

|                                  |                                                                    |
|----------------------------------|--------------------------------------------------------------------|
| Retroreflective sheeting         | Class I (RA1), UV-resistant                                        |
| Retroreflection (white, 0.2°/5°) | 70 cd/(lx·m²)                                                      |
| Sheeting service life            | 7 years                                                            |
| Weight                           | 3.2 kg                                                             |
| Fixings included                 | 2 clamps, 4 bolts with nuts                                        |
| Post diameter                    | Ø48 mm (Ø60 mm on request)                                         |
| Standards                        | SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011, SR 1848-3:2011 |
| Marking                          | CE                                                                 |

## Description

The G12 tells drivers that a pedestrian footbridge is nearby. The white field of the blue rectangle carries a pedestrian climbing steps.

### When class I is used

Class I means RA1 retroreflective sheeting, with 70 cd/(lx·m²) for white and a 7-year service life. It suits places where the sign does not compete with other lights: roads and streets without strong lighting, local, minor and private roads. In areas with many light sources, such as streets with public lighting, shop windows and advertising, SR 1848-2 requires prismatic class 2 or 3 sheeting, because a class I sign gets lost against the background there.

### Where it goes, under SR 1848-1:2024

It goes before the access to the overhead footbridge.

The general rule in SR 1848-1:2024: the information sign stands in the area of the place it shows, and where useful it is signed in advance with an identical sign at least 50 m ahead in towns and 150 m outside them; the distance is written at the bottom in white or on the P1 panel.

### Technical data

- 50 × 65 cm panel: blue rectangle with a white field showing a pedestrian climbing steps;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- weight: 3.2 kg;
- fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts;
- CE marked; compliant with SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011 and SR 1848-3:2011.

### Mounting and size

Fixings for the post are included: 2 clamps for Ø48 mm posts and 4 bolts with nuts; clamps for Ø60 mm posts are available on request. The bottom edge of the sign goes 1.50–2.50 m above the road or kerb, and the edge nearest the road 0.50–2.0 m from the road platform. The sign must be visible from at least 50 m in built-up areas and 100 m outside them.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. For temporary use, with no foundation: the Ø48 mm tripod post, 120 cm. On concrete or paving, where you cannot dig: the Ø60 mm flange post, 300 cm, bolted down; for it, ask for the Ø60 mm clamps when you order.

The panel measures 50 × 65 cm, white field 40 × 35 cm. These are the dimensions SR 1848-2 sets for this sign.