# G31 Information Sign – Parking, 50×65 cm, Class I

Class I (EGP) Road Signs | Signs compliant with SR 1848-1:2024



## AT A GLANCE

- Information sign G31 "Parking", to SR 1848-1:2024.
- Blue rectangle, 50 × 65 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

| | |
|---|---|
| Product code | **G31** |
| Category | **Metal Road Signs** |
| Weight | **3.2 kg** |
| Compliance | **Class I (EGP) Road Signs** |
| Compliance | **Signs compliant with SR 1848-1:2024** |

This product on attotrafic.ro
**https://attotrafic.ro/en_US/products/g31-parcare-50×65-cm-clasa-i**

## Technical specifications

| | |
|---|---|
| **SR 1848-1 code** | G31 |
| **Name in the standard** | Parking |
| **Type** | Information road sign |
| **Shape and colours** | Blue rectangle with the white letter P |
| **Size** | 50 × 65 cm |
| **Material** | Galvanised steel sheet, 1 mm |
| **Construction** | Rounded corners, pressed edges, no sharp edges |
| **Painting** | Electrostatic, UV-resistant paint |
| **Retroreflective sheeting** | Class I (RA1), UV-resistant |
| **Retroreflection (white, 0.2°/5°)** | 70 cd/(lx·m²) |

| | |
|---|---|
| **Sheeting service life** | 7 years |
| **Weight** | 3.2 kg |
| **Fixings included** | 2 clamps, 4 bolts with nuts |
| **Post diameter** | Ø48 mm (Ø60 mm on request) |
| **Standards** | SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011, SR 1848-3:2011 |
| **Marking** | CE |

## Description

The G31, the white letter P on a blue rectangle, is the most used information sign: it shows where you can park.

### When class I is used

The sign has class I (RA1) retroreflective sheeting: 70 cd/(lx·m²) for white and a 7-year service life. It is the economical choice for places without many light sources, such as local, minor and private roads or streets without strong lighting. Where there is street lighting, shop windows or advertising, SR 1848-2 requires prismatic class 2 or 3 sheeting, which stands out better against a lit background. The class II version is the G31_II (50×65 cm).

### Where it goes, under SR 1848-1:2024

It goes before places for parking or standing vehicles. The bottom of the sign may show: an arrow towards the car park and, where needed, the distance; a car symbol in the position in which it may park relative to the kerb; the P15 or P16 (pay parking) symbol; a text such as "Reserved for vehicles with a badge, CD"; the outline of a vehicle category, when the car park is reserved for it alone.

The general rule in SR 1848-1:2024: the information sign stands in the area of the place it shows, and where useful it is signed in advance with an identical sign at least 50 m ahead in towns and 150 m outside them; the distance is written at the bottom in white or on the P1 panel.

### Technical data

- 50 × 65 cm panel: blue rectangle with the white letter P;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- weight: 3.2 kg;
- fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts;
- CE marked; compliant with SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011 and SR 1848-3:2011.

### Mounting and size

Fixings for the post are included: 2 clamps for Ø48 mm posts and 4 bolts with nuts; clamps for Ø60 mm posts are available on request. The bottom edge of the sign goes 1.50–2.50 m above the road or kerb, and the edge nearest the road 0.50–2.0 m from the road platform. The sign must be visible from at least 50 m in built-up areas and 100 m outside them.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. For temporary use, with no foundation: the Ø48 mm tripod post, 120 cm. On concrete or paving, where you cannot dig: the Ø60 mm flange post, 300 cm, bolted down; for it, ask for the Ø60 mm clamps when you order.

The panel measures 50 × 65 cm.

The class II sheeting version is the G31_II.

## Drawings and details · 1/3

# G31 – Parcare

Parking

50 x 65 cm · dimensiunile feței indicatorului

50 x 65 cm · sign face dimensions




**Dimensiuni SR 1848-2 (mm)**

SR 1848-2 dimensions (mm)

**50 x 65 cm**

500 x 650 · r = 30

toate drumurile

all roads

Cotele sunt ale feței retroreflectorizante.

Dimensions of the retroreflective face.

Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).

The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).

Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).

Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).

Litera P: tip „normal”, H = 350 mm (tab. 9). Variantele cu text suplimentar (o, s, b, d, i, r, v) sunt după desenele noastre.

Letter P: normal type, H = 350 mm (table 9). The variants with extra text (o, s, b, d, i, r, v) follow our drawings.


Scriere SR 1848-3: tip „normal”, H = 350 mm.

SR 1848-3 lettering: normal type, H = 350 mm.

Sursa: SR 1848-2:2011, tab. 9.

Source: SR 1848-2:2011, table 9.


## Drawings and details · 2/3

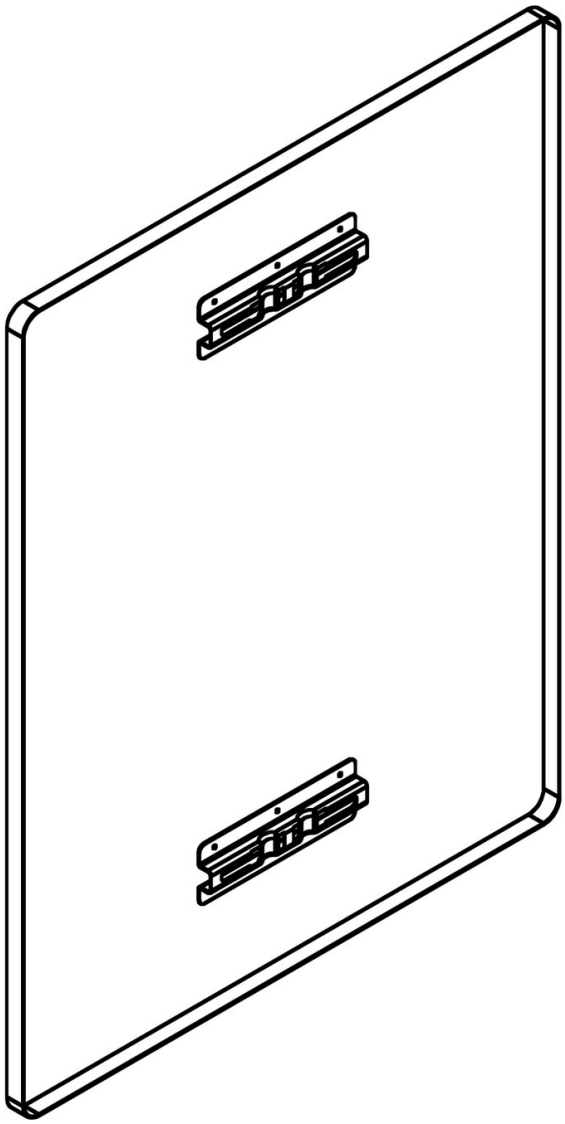

## Drawings and details · 3/3

# Prindere cu canal și colier, stâlp Ø48 mm

Channel and clamp fixing, Ø48 mm post

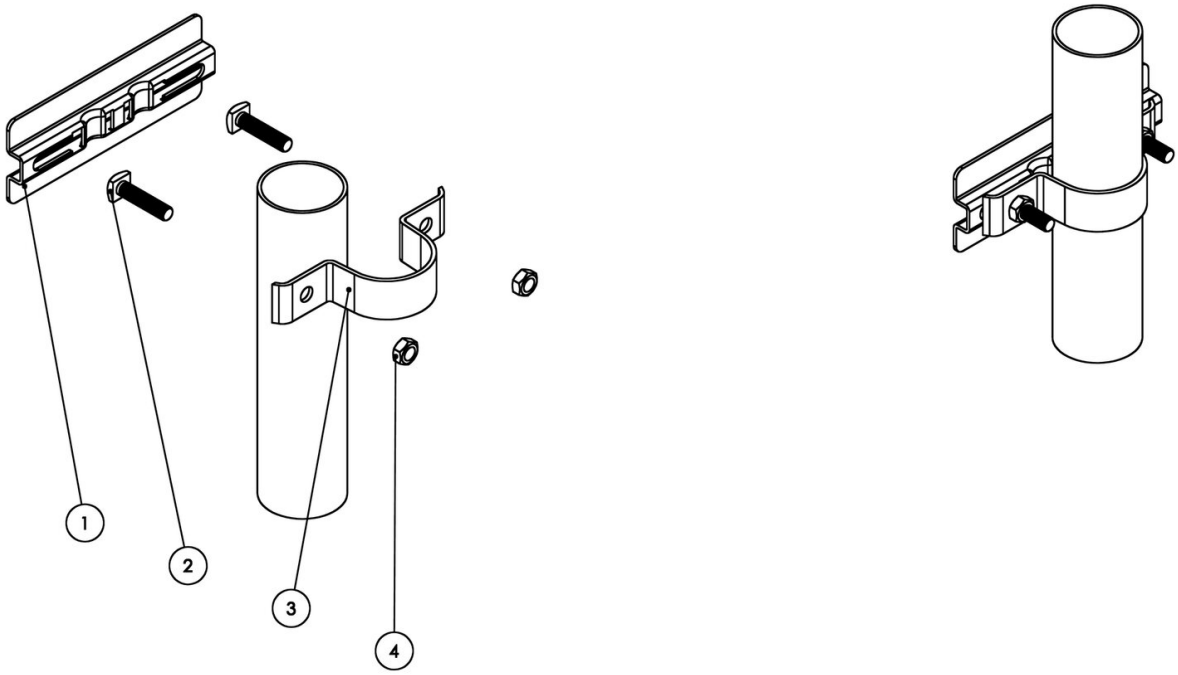


**1** Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

**2** Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

**3** Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

**4** Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.