G31 Information Sign – Parking with Arrow Back, 50×65 cm, Class I

Class I (EGP) Road Signs



AT A GLANCE

- Information sign G31 “Parking with Arrow Back”, to SR 1848-1:2024.
- Blue rectangle, 50 × 65 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**G31sip**
Category	**Non-STAS**
Weight	**3.2 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/g31-parcare-cu-sageata-inapoi-50×65-cm-clasa-i

Technical specifications

SR 1848-1 code	G31
Name in the standard	Parking
Type	Information road sign
Shape and colours	Blue rectangle with a white line around it, the letter P and an arrow pointing down, in white
Size	50 × 65 cm
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant

Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)
Sheeting service life	7 years
Weight	3.2 kg
Fixings included	2 clamps, 4 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011, SR 1848-3:2011
Marking	CE

Description

This is a version of the G31 (parking): next to the letter P there is an arrow pointing down, showing drivers the way to the car park. SR 1848-1:2024 allows an arrow towards the car park at the bottom of the sign.

When class I is used

Class I means RA1 retroreflective sheeting, with 70 cd/(lx·m²) for white and a 7-year service life. It suits places where the sign does not compete with other lights: roads and streets without strong lighting, local, minor and private roads. In areas with many light sources, such as streets with public lighting, shop windows and advertising, SR 1848-2 requires prismatic class 2 or 3 sheeting, because a class I sign gets lost against the background there.

Where it goes, under SR 1848-1:2024

It goes before places for parking or standing vehicles. The bottom of the sign may show: an arrow towards the car park and, where needed, the distance; a car symbol in the position in which it may park relative to the kerb; the P15 or P16 (pay parking) symbol; a text such as “Reserved for vehicles with a badge, CD”; the outline of a vehicle category, when the car park is reserved for it alone.

Like all information signs, it has a blue background on ordinary roads and a green one on motorways, and it goes level with the place it indicates. Advance signing, where needed, uses an identical sign at least 50 m ahead in towns or 150 m outside them.

Technical data

- 50 × 65 cm panel: blue rectangle with a white line around it, the letter P and an arrow pointing down, in white;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- weight: 3.2 kg;
- fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts;
- CE marked; compliant with SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011 and SR 1848-3:2011.

Mounting and size

Fixings for the post are included: 2 clamps for Ø48 mm posts and 4 bolts with nuts; clamps for Ø60 mm posts are available on request. The bottom edge of the sign goes 1.50–2.50 m above the road or kerb, and the edge nearest the road 0.50–2.0 m from the road platform. The sign must be visible from at least 50 m in built-up areas and 100 m outside them.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. For temporary use, with no foundation: the Ø48 mm tripod post, 120 cm. On concrete or paving, where you cannot dig: the Ø60 mm flange post, 300 cm, bolted down; for it, ask for the Ø60 mm clamps when you order.

The panel measures 50 × 65 cm.

Drawings and details · 1/3

G31sip – Parcare cu săgeată înapoi

Parking with arrow back

50 x 65 cm · dimensiunile feței indicatorului

50 x 65 cm · sign face dimensions



Dimensiuni SR 1848-2 (mm)

SR 1848-2 dimensions (mm)

50 x 65 cm	
500 x 650 · r = 30	
toate drumurile	
all roads	

Cotele sunt ale feței retroreflectorizante.

Dimensions of the retroreflective face.

Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).

The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).

Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).

Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).

Litera P: tip „normal”, H = 350 mm (tab. 9). Variantele cu text sau siluetă (o, s, b, d, i, r, v, a, t, p, m, si, ss, sd, sip) sunt după desenele noastre.

Letter P: normal type, H = 350 mm (table 9). The variants with extra text or a silhouette (o, s, b, d, i, r, v, a, t, p, m, si, ss, sd, sip) follow our drawings.

Scriere SR 1848-3: tip „normal”, H = 350 mm.


SR 1848-3 lettering: normal type, H = 350 mm.

Sursa: SR 1848-2:2011, tab. 9.

Source: SR 1848-2:2011, table 9.

G31sip dimensions


Drawings and details · 2/3

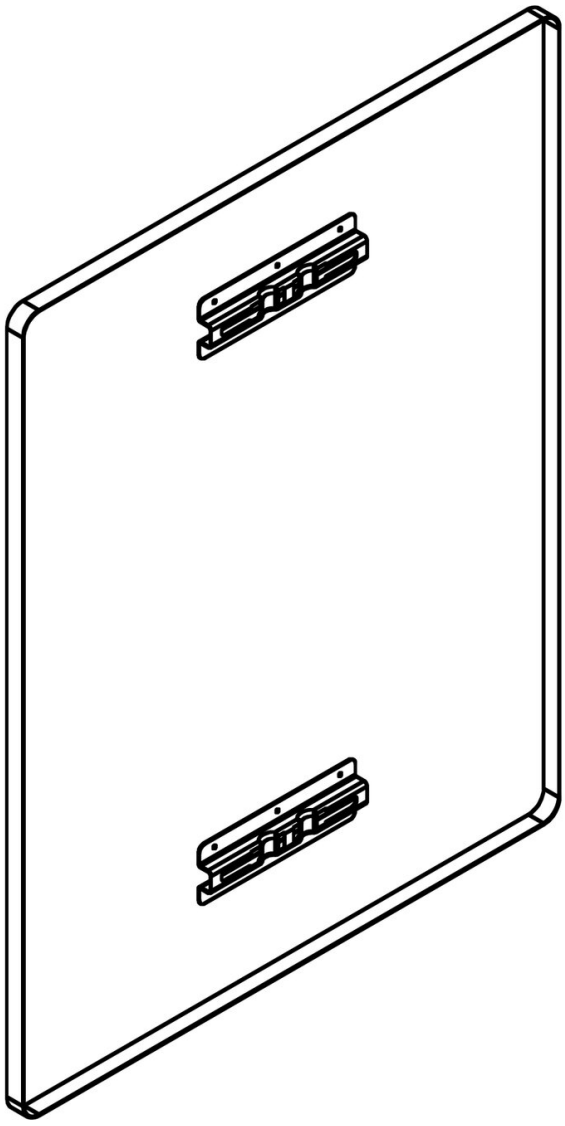

Back of the G31sip panel

Drawings and details · 3/3

Prindere cu canal și colier, stâlp Ø48 mm
Channel and clamp fixing, Ø48 mm post

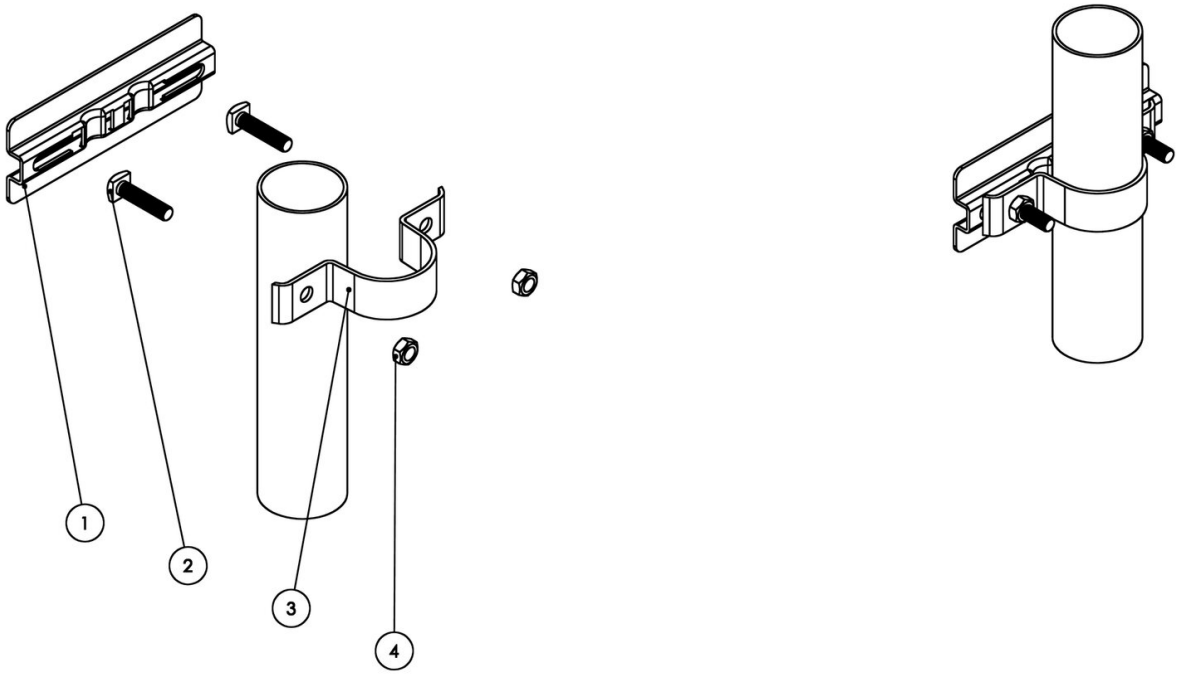

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.

G31sip fixing system