# Fence with Sign Panel, Red – Keep Left and Road Works, 100×50 cm

Class I (EGP) Road Signs

## AT A GLANCE

- Red 150 × 100 cm fence with a yellow 100 × 50 cm panel.
- On the panel: keep left and road works.
- 4 red and white chequered reflective films; joining clip.
- 2 threaded sockets for lamps.

| | |
|---|---|
| Product code | **ATZ 80150-ROL** |
| Category | **Barriers** |
| Brand | **Atto Trafic** |
| Weight | **12 kg** |
| Compliance | **Class I (EGP) Road Signs** |

This product on attotrafic.ro
**https://attotrafic.ro/en_US/products/gard-cu-panou-semnalizare-rosu-ocolire-stanga-si-lucrari-100×50-cm**

## Technical specifications

| | |
|---|---|
| **Panel Dimensions** | 100 × 50 cm |
| **Material** | PVC, PPC |
| **Color** | Red |
| **Reflective** | 4 reflective sheets |
| **Installation** | 4 Dowels, 4 Screws |

## Description

The yellow 100 × 50 cm panel has the round blue sign with an arrow pointing down-left on the left, and the road works triangle on the right. The driver sees what is happening and which way to go in one glance.

### When to use it

When the work is on the right side of the lane or on the verge and traffic has to be sent round it on the left: an open manhole by the kerb, a hole at the road edge, pavement work that spills onto the carriageway.

### How the fence is built

The frame is red PVC and PPC, 150 × 100 cm and 5 cm thick, standing on two black feet. Top and bottom it has red and white chequered bands, 4 reflective films in total. The fence weighs 12 kg.

### In a line with other fences

The side clip attaches it to other modular fences, and the 2 threaded sockets take warning lamps for the night. It usually goes at the end of the line, facing oncoming traffic.

### For the other side

If traffic has to pass on the right, the matching version is the ATZ 80150-RLO, with road works and keep right.

## Drawings and details · 1/5

**Dimensiuni**
Dimensions

mm

**ATZ 80150-ROL**

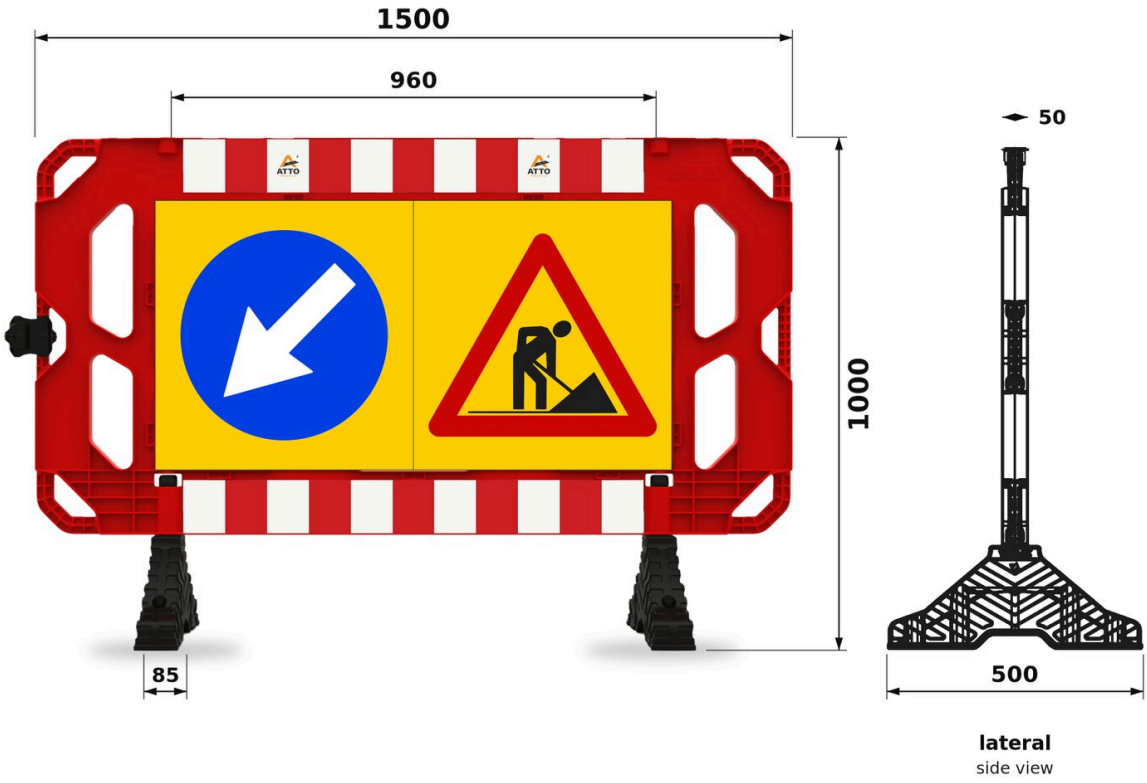


Lungime 150 cm, înălțime 100 cm, grosimea ramei 5 cm; picior de 50 cm. Greutate 12 kg. Abatere admisă ± 5 %.
Length 150 cm, height 100 cm, frame 5 cm thick; 50 cm foot. Weight 12 kg. Tolerance ± 5 %.
Panou PVC spumat de 100 x 50 cm, pe o singură față (măsoară 101 x 52 cm, grosime 3 mm).
100 x 50 cm PVC foam panel on one side (measures 101 x 52 cm, 3 mm thick).
2 socluri filetate Ø32 mm, adânci de 25,5 mm, la 96 cm distanță, pentru lămpi sau indicatoare.
2 threaded Ø32 mm sockets, 25.5 mm deep, 96 cm apart, for lamps or signs.

ATZ 80150-ROL dimensions

## Drawings and details · 2/5

**Detalii**
Details

**ATZ 80150-ROL**

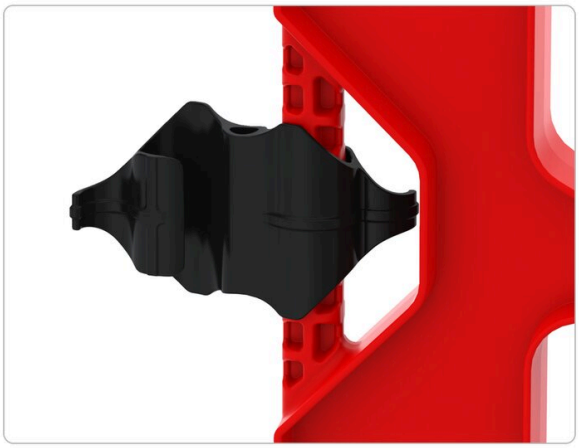

**Clemă laterală: se prinde de gardul următor**
Side clamp: locks onto the next barrier

**Soclu filetat Ø32 mm, pentru lampă sau indicator**
Threaded Ø32 mm socket for a lamp or sign

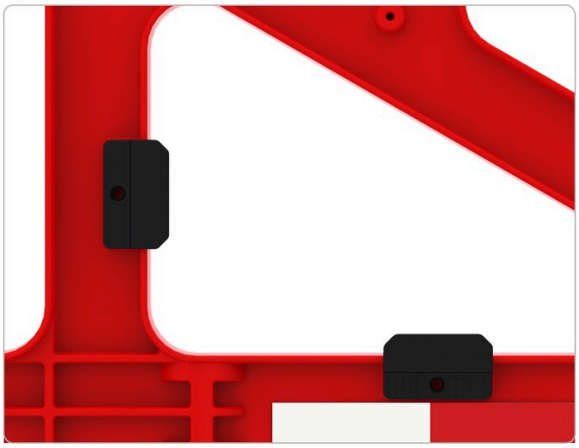

**Panoul se prinde cu 9 cleme cu șurub, incluse**
The panel is held by 9 clamps with screws, included

**Picior rotativ de 50 cm, se fixează cu 2 șuruburi**
Rotating 50 cm foot, fixed with 2 screws

ATZ 80150-ROL details

## Drawings and details · 3/5

### Cum se folosește

How it is used

**ATZ 80150-ROL**

**La capătul șirului, urmat de garduri modulare ATZ 80150-R**

At the end of a run, followed by ATZ 80150-R modular barriers

**4 garduri închid o zonă pe toate laturile**

4 barriers close an area on all sides

**Se stivuiesc culcate, pe palet**

They stack flat on a pallet

ATZ 80150-ROL: how it is used

## Drawings and details · 4/5

**Cu indicator și lampă**
With a sign and a lamp

**ATZ 80150-ROL**

**Indicatorul și lampa se montează în cele 2 socluri filetate și se comandă separat**
The sign and the lamp fit the 2 threaded sockets and are ordered separately

**Indicator din plastic pe soclu**
Plastic sign on the socket

**Lampă solară ATZ 404-Y pe soclu**
ATZ 404-Y solar lamp on the socket

ATZ 80150-ROL with a plastic sign and an ATZ 404-Y lamp mounted on the sockets

## Drawings and details · 5/5

### Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

**ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă**

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head

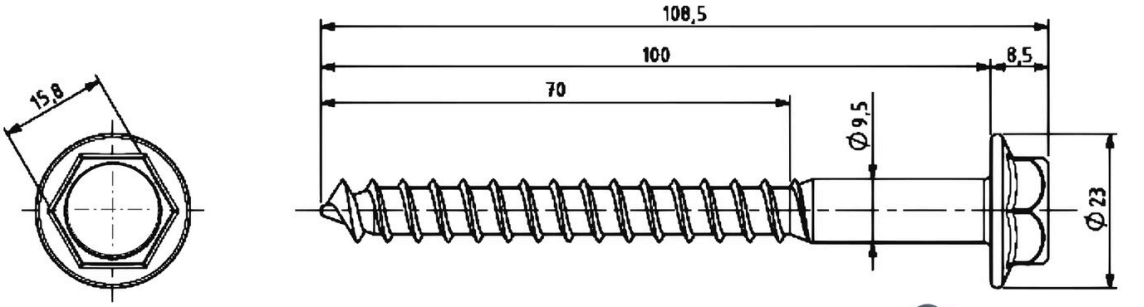

**ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)**

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

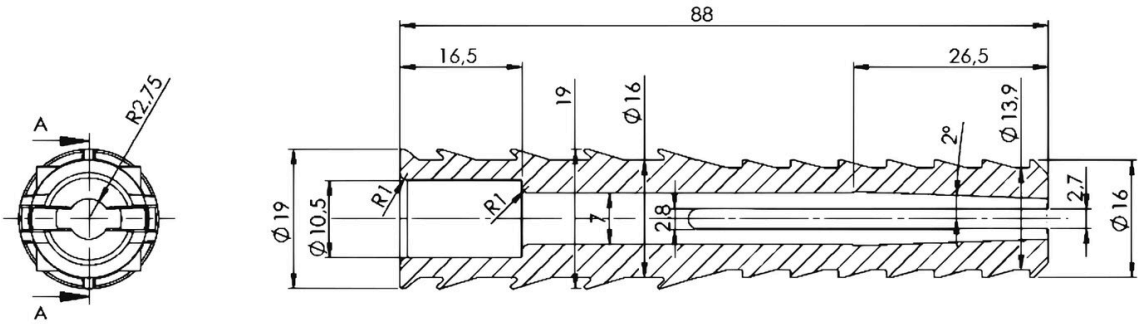


Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

ATZ 80150-ROL fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel