Signalling Fence with Sign Panel – No Entry and Road Works, Red, 150×100 cm

Class I (EGP) Road Signs



AT A GLANCE

- Red 150 × 100 cm fence with a yellow 100 × 50 cm panel.
- On the panel: no entry and road works.
- Red and white chequered reflective bands, 4 films.
- Joining clip and 2 threaded sockets.

Product code	**ATZ 80150-RAL**
Category	**Barriers**
Brand	**Atto Trafic**
Weight	**13 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/gard-de-semnalizare-cu-panou-accesul-interzis-si-lucrari-rosu-150×100-cm

Technical specifications

Panel Dimensions	100 × 50 cm
Material	PVC, PPC
Color	Red
Reflective	4 reflective sheets
Installation	4 Dowels, 4 Screws
Weight	13 kg (fence 12 kg + panel 1 kg)

Description

A red 150 × 100 cm fence with the yellow 100 × 50 cm panel in the middle. On the left of the panel is the no entry sign, a red circle with a white bar, and on the right the road works triangle.

What it solves

One fence closes the road and also shows why: there is work going on behind it. It is useful at the end of a street closed for works, at the entrance to a site area or on a closed lane, where there is no way past.

Technical data

- PVC and PPC fence, 150 × 100 cm, 5 cm thick;
- 12 kg, on two black feet; 13 kg with the panel fitted;
- 4 reflective films in the red and white chequered bands;
- 2 threaded sockets for lamps or plastic signs;
- side clip for joining to other fences.

Together with other fences

It rarely stands alone: you clip it to a few plain modular barriers, and it stays as the one carrying the message, facing oncoming traffic.

The panel is also sold on its own


The ATZ P150-AL panel can be bought on its own and fits every ATZ 80150 fence. If the road stays open on one side, choose the ATZ 80150-RAO, keeping right, or the ATZ 80150-ROA, keeping left.

Drawings and details · 1/5

Dimensiuni
Dimensions

mm

ATZ 80150-RAL

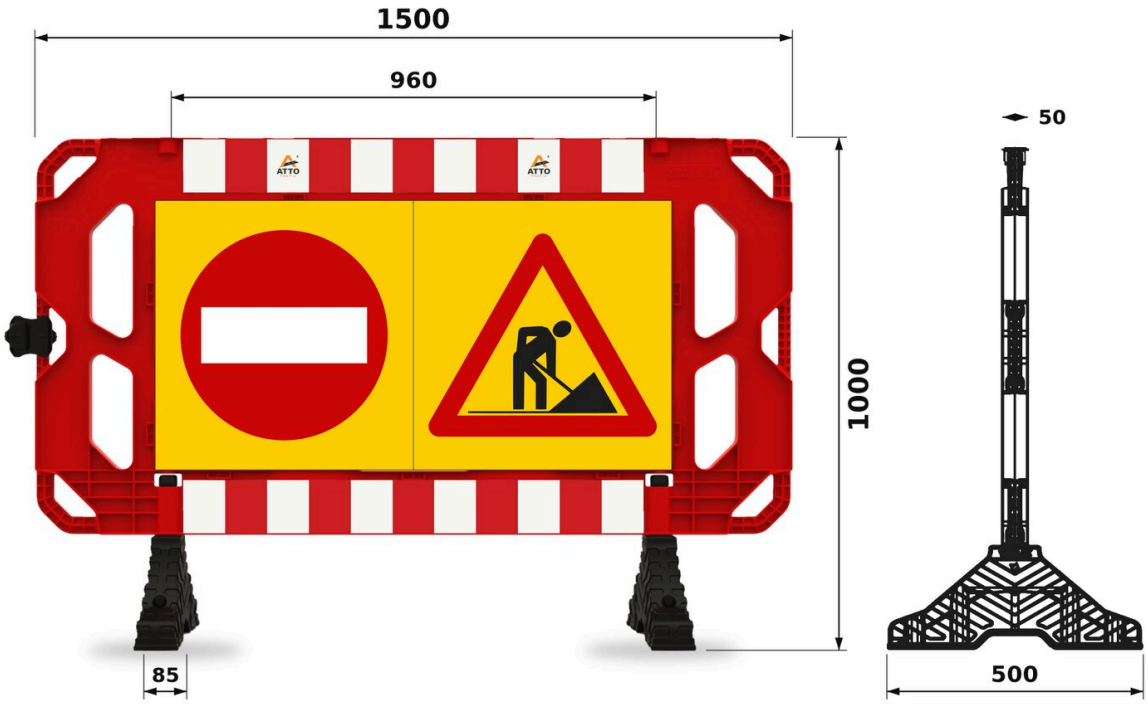

lateral
side view


Lungime 150 cm, înălțime 100 cm, grosimea ramei 5 cm; picior de 50 cm. Greutate 12 kg. Abatere admisă ± 5 %.
Length 150 cm, height 100 cm, frame 5 cm thick; 50 cm foot. Weight 12 kg. Tolerance ± 5 %.
Panou PVC spumat de 100 x 50 cm, pe o singură față (măsoară 101 x 52 cm, grosime 3 mm).
100 x 50 cm PVC foam panel on one side (measures 101 x 52 cm, 3 mm thick).
2 socluri filetate Ø32 mm, adânci de 25,5 mm, la 96 cm distanță, pentru lămpi sau indicatoare.
2 threaded Ø32 mm sockets, 25.5 mm deep, 96 cm apart, for lamps or signs.

ATZ 80150-RAL dimensions

Drawings and details · 2/5

Detalii
Details


ATZ 80150-RAL

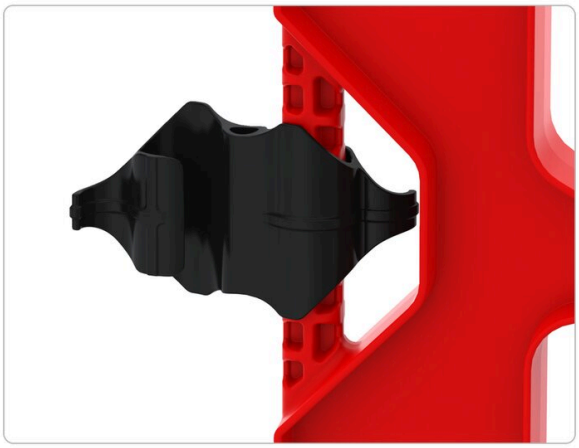

Clemă laterală: se prinde de gardul următor
Side clamp: locks onto the next barrier



Soclu filetat Ø32 mm, pentru lampă sau indicator
Threaded Ø32 mm socket for a lamp or sign

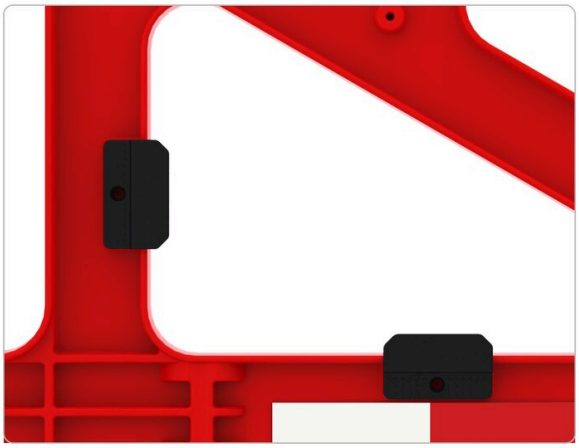

Panoul se prinde cu 9 cleme cu șurub, incluse
The panel is held by 9 clamps with screws, included



Picior rotativ de 50 cm, se fixează cu 2 șuruburi
Rotating 50 cm foot, fixed with 2 screws

ATZ 80150-RAL details

Drawings and details · 3/5

Cum se folosește

How it is used

ATZ 80150-RAL



La capătul șirului, urmat de garduri modulare ATZ 80150-R

At the end of a run, followed by ATZ 80150-R modular barriers



4 garduri închid o zonă pe toate laturile

4 barriers close an area on all sides



Se stivuiesc culcate, pe palet

They stack flat on a pallet

ATZ 80150-RAL: how it is used

Drawings and details · 4/5

Cu indicator și lampă
With a sign and a lamp

ATZ 80150-RAL



Indicatorul și lampa se montează în cele 2 socluri filetate și se comandă separat
The sign and the lamp fit the 2 threaded sockets and are ordered separately



Indicator din plastic pe soclu
Plastic sign on the socket



Lampă solară ATZ 404-Y pe soclu
ATZ 404-Y solar lamp on the socket

ATZ 80150-RAL with a plastic sign and an ATZ 404-Y lamp mounted on the sockets

Drawings and details · 5/5


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




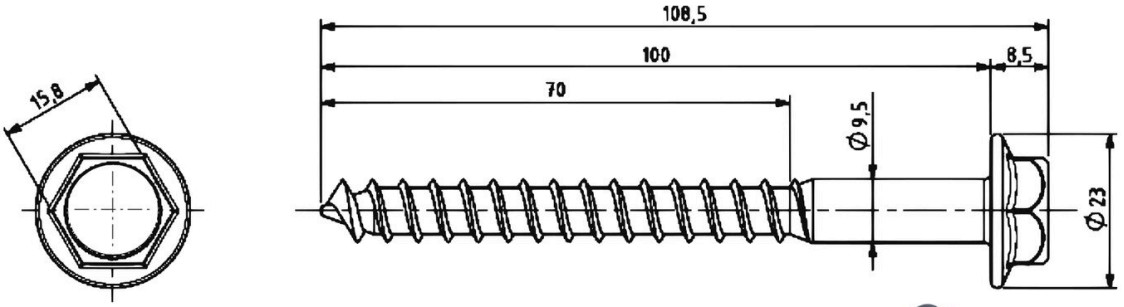



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

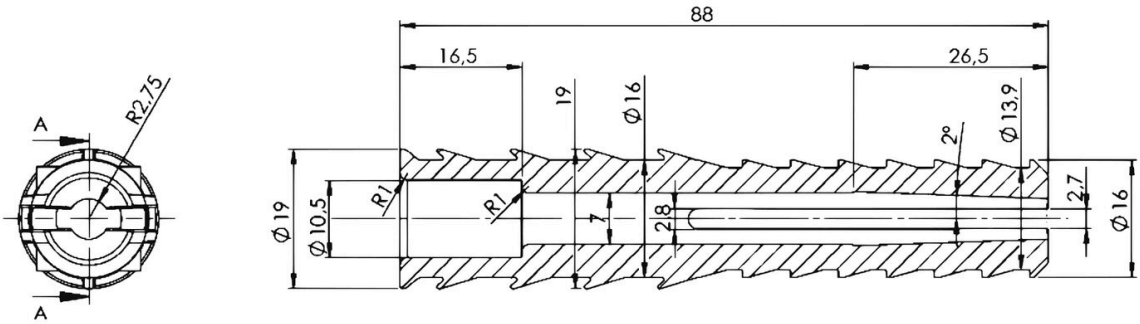

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

ATZ 80150-RAL fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel