Signalling Fence with Sign Panel – Road Works and Keep Right, Red, 150×100 cm

Class I (EGP) Road Signs



AT A GLANCE

- Red 150 × 100 cm fence with a yellow 100 × 50 cm panel.
- On the panel: road works and keep right.
- Red and white chequered reflective bands (4 films); joining clip.
- 2 threaded sockets for warning lamps.

Product code	**ATZ 80150-RLO**
Category	**Barriers**
Brand	**Atto Trafic**
Weight	**12 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/gard-de-semnalizare-cu-panou-lucrari-si-ocolire-prin-dreapta-rosu-150×100-cm

Technical specifications

Panel Dimensions	100 × 50 cm
Material	PVC, PPC
Color	Red
Reflective	4 reflective sheets
Installation	4 Dowels, 4 Screws

Description

This is the counterpart of the ATZ 80150-ROL. Here the road works triangle is on the left of the panel and the blue sign with an arrow pointing down-right is on the right. You put it out when the work takes up the left side of the lane and cars have to pass it on the right.

Typical situations

- work next to the centre line on a two-way street;
- a job on a traffic island or the verge between carriageways;
- a hole on the left side of a lane on a multi-lane road.

What you get

The red 150 × 100 cm fence in PVC and PPC, on two black feet, with red and white chequered reflective bands (4 films), and the yellow 100 × 50 cm panel with both signs. The fence weighs 12 kg.

A lamp for the night

The 2 threaded sockets take warning lamps. For work left open overnight, a flashing yellow lamp makes the fence visible where headlights do not shine directly.

Joining to other fences


The side clip attaches it to other modular barriers, so the sign stands at the end of a continuous enclosure.

Drawings and details · 1/5

Dimensiuni
Dimensions

mm

ATZ 80150-RLO

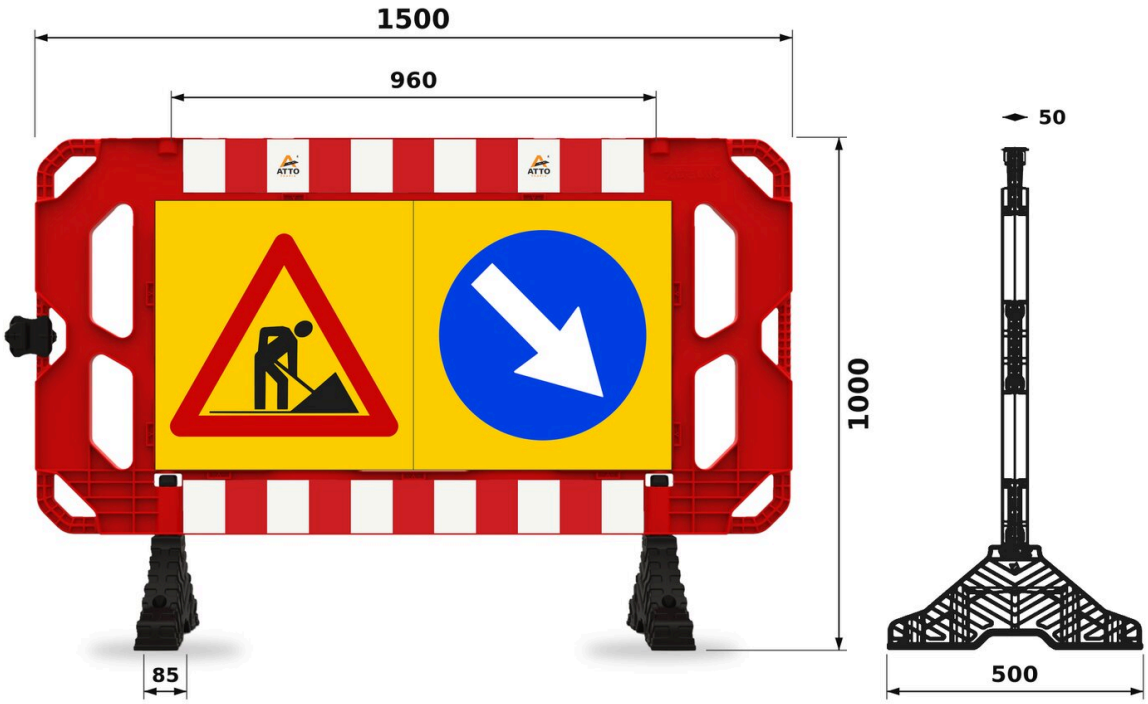

lateral
side view


Lungime 150 cm, înălțime 100 cm, grosimea ramei 5 cm; picior de 50 cm. Greutate 12 kg. Abatere admisă ± 5 %.
Length 150 cm, height 100 cm, frame 5 cm thick; 50 cm foot. Weight 12 kg. Tolerance ± 5 %.
Panou PVC spumat de 100 x 50 cm, pe o singură față (măsoară 101 x 52 cm, grosime 3 mm).
100 x 50 cm PVC foam panel on one side (measures 101 x 52 cm, 3 mm thick).
2 socluri filetate Ø32 mm, adânci de 25,5 mm, la 96 cm distanță, pentru lămpi sau indicatoare.
2 threaded Ø32 mm sockets, 25.5 mm deep, 96 cm apart, for lamps or signs.

ATZ 80150-RLO dimensions

Drawings and details · 2/5

Detalii
Details


ATZ 80150-RLO

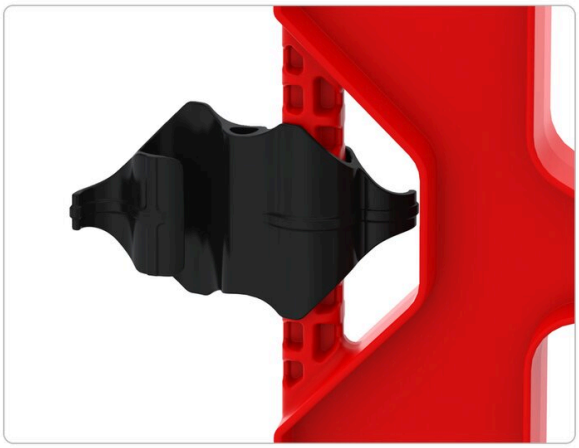

Clemă laterală: se prinde de gardul următor
Side clamp: locks onto the next barrier



Soclu filetat Ø32 mm, pentru lampă sau indicator
Threaded Ø32 mm socket for a lamp or sign

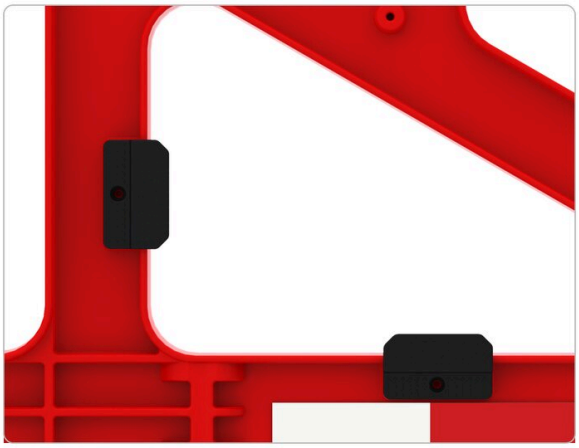

Panoul se prinde cu 9 cleme cu șurub, incluse
The panel is held by 9 clamps with screws, included



Picior rotativ de 50 cm, se fixează cu 2 șuruburi
Rotating 50 cm foot, fixed with 2 screws

ATZ 80150-RLO details

Drawings and details · 3/5

Cum se folosește
How it is used

ATZ 80150-RLO



La capătul șirului, urmat de garduri modulare ATZ 80150-R
At the end of a run, followed by ATZ 80150-R modular barriers



4 garduri închid o zonă pe toate laturile
4 barriers close an area on all sides



Se stivuiesc culcate, pe palet
They stack flat on a pallet

ATZ 80150-RLO: how it is used

Drawings and details · 4/5

Cu indicator și lampă
With a sign and a lamp

ATZ 80150-RLO



Indicatorul și lampa se montează în cele 2 socluri filetate și se comandă separat
The sign and the lamp fit the 2 threaded sockets and are ordered separately



Indicator din plastic pe soclu
Plastic sign on the socket



Lampă solară ATZ 404-Y pe soclu
ATZ 404-Y solar lamp on the socket

ATZ 80150-RLO with a plastic sign and an ATZ 404-Y lamp mounted on the sockets

Drawings and details · 5/5


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




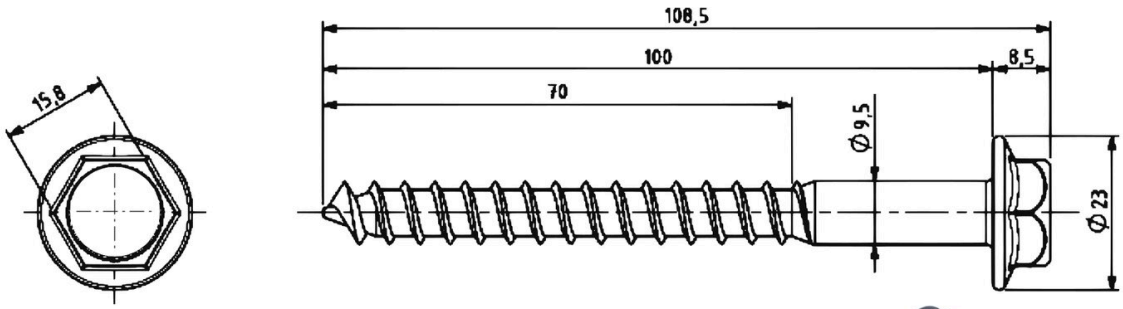



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

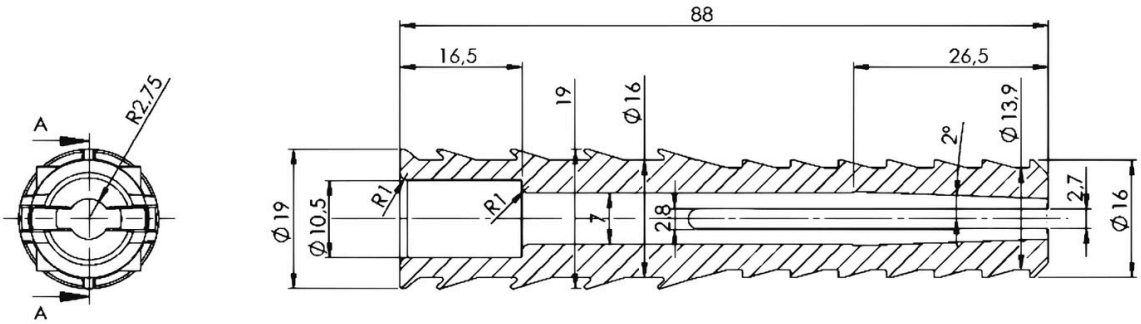

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

ATZ 80150-RLO fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel