Signalling Fence with Sign Panel – Keep Left and Road Works, Red, 150×100 cm

Class I (EGP) Road Signs



AT A GLANCE

- Red 150 × 100 cm fence with a yellow 100 × 50 cm panel.
- On the panel: keep left and road works.
- 4 red and white chequered reflective films; joining clip.
- 2 threaded sockets for lamps.

Product code	**ATZ 80150-ROL**
Category	**Barriers**
Brand	**Atto Trafic**
Weight	**12 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/gard-de-semnalizare-cu-panou-ocolire-prin-stanga-si-lucrari-rosu-150×100-cm

Technical specifications

Panel Dimensions	100 × 50 cm
Material	PVC, PPC
Color	Red
Reflective	4 reflective sheets
Installation	4 Dowels, 4 Screws

Description

The yellow 100 × 50 cm panel has the round blue sign with an arrow pointing down-left on the left, and the road works triangle on the right. The driver sees what is happening and which way to go in one glance.

When to use it

When the work is on the right side of the lane or on the verge and traffic has to be sent round it on the left: an open manhole by the kerb, a hole at the road edge, pavement work that spills onto the carriageway.

How the fence is built

The frame is red PVC and PPC, 150 × 100 cm and 5 cm thick, standing on two black feet. Top and bottom it has red and white chequered bands, 4 reflective films in total. The fence weighs 12 kg.

In a line with other fences

The side clip attaches it to other modular fences, and the 2 threaded sockets take warning lamps for the night. It usually goes at the end of the line, facing oncoming traffic.

For the other side


If traffic has to pass on the right, the matching version is the ATZ 80150-RLO, with road works and keep right.

Drawings and details · 1/5

Dimensiuni
Dimensions

mm

ATZ 80150-ROL

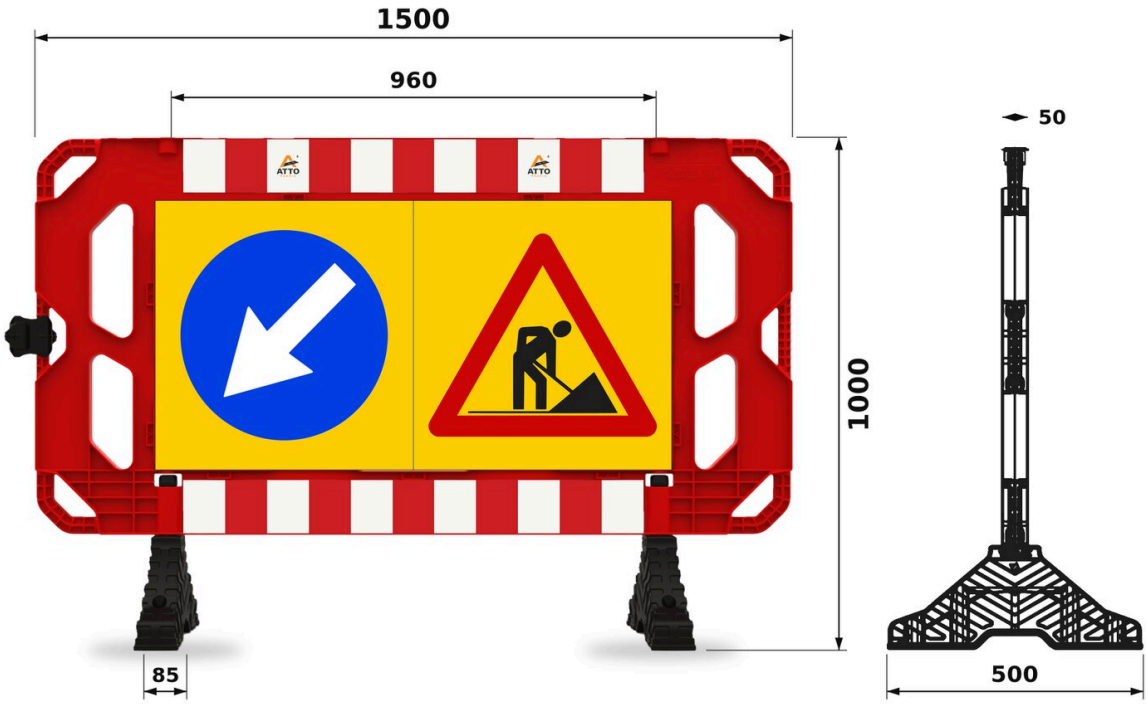

lateral
side view


Lungime 150 cm, înălțime 100 cm, grosimea ramei 5 cm; picior de 50 cm. Greutate 12 kg. Abatere admisă ± 5 %.
Length 150 cm, height 100 cm, frame 5 cm thick; 50 cm foot. Weight 12 kg. Tolerance ± 5 %.
Panou PVC spumat de 100 x 50 cm, pe o singură față (măsoară 101 x 52 cm, grosime 3 mm).
100 x 50 cm PVC foam panel on one side (measures 101 x 52 cm, 3 mm thick).
2 socluri filetate Ø32 mm, adânci de 25,5 mm, la 96 cm distanță, pentru lămpi sau indicatoare.
2 threaded Ø32 mm sockets, 25.5 mm deep, 96 cm apart, for lamps or signs.

ATZ 80150-ROL dimensions

Drawings and details · 2/5

Detalii
Details


ATZ 80150-ROL

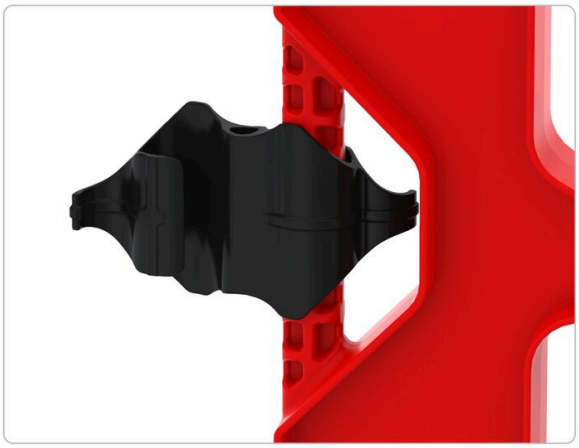

Clemă laterală: se prinde de gardul următor
Side clamp: locks onto the next barrier



Soclu filetat Ø32 mm, pentru lampă sau indicator
Threaded Ø32 mm socket for a lamp or sign

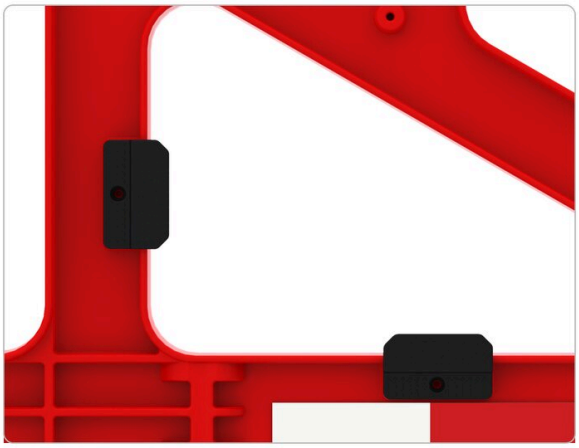

Panoul se prinde cu 9 cleme cu șurub, incluse
The panel is held by 9 clamps with screws, included



Picior rotativ de 50 cm, se fixează cu 2 șuruburi
Rotating 50 cm foot, fixed with 2 screws

ATZ 80150-ROL details

Drawings and details · 3/5

Cum se folosește

How it is used

ATZ 80150-ROL



La capătul șirului, urmat de garduri modulare ATZ 80150-R

At the end of a run, followed by ATZ 80150-R modular barriers



4 garduri închid o zonă pe toate laturile

4 barriers close an area on all sides



Se stivuiesc culcate, pe palet

They stack flat on a pallet

ATZ 80150-ROL: how it is used

Drawings and details · 4/5

Cu indicator și lampă
With a sign and a lamp

ATZ 80150-ROL



Indicatorul și lampa se montează în cele 2 socluri filetate și se comandă separat
The sign and the lamp fit the 2 threaded sockets and are ordered separately



Indicator din plastic pe soclu
Plastic sign on the socket



Lampă solară ATZ 404-Y pe soclu
ATZ 404-Y solar lamp on the socket

ATZ 80150-ROL with a plastic sign and an ATZ 404-Y lamp mounted on the sockets

Drawings and details · 5/5


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




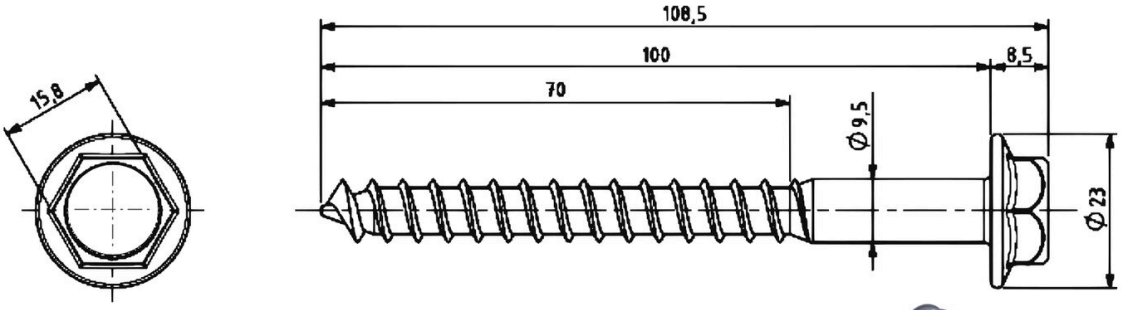



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

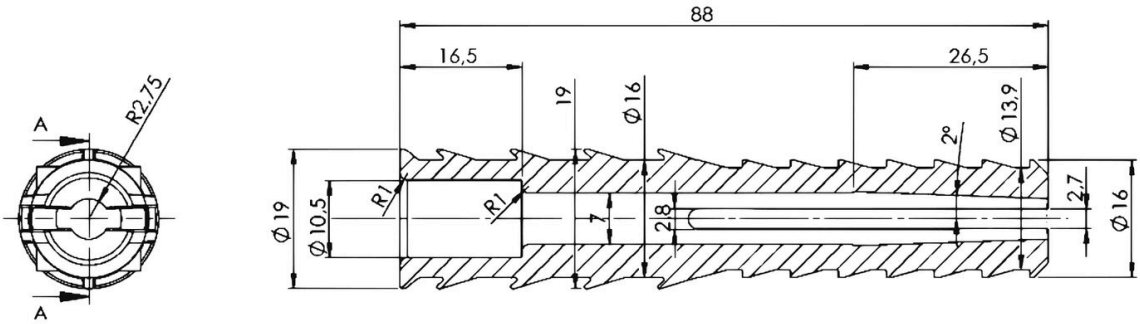

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

ATZ 80150-ROL fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel