C37 Prohibition Sign – No Stopping, Ø80 cm, Class II

Signs compliant with SR 1848-1:2024



AT A GLANCE

- Prohibition sign C37 "No stopping", to SR 1848-1:2024.
- 80 cm diameter blue disc with a red border and a red X, in 1 mm galvanised steel sheet.
- Class II (RA2) prismatic sheeting, guaranteed 10-year service life.
- Fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**C37_II**
Category	**Metal Road Signs (Class II)**
Weight	**5.5 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/indicator-c37-oprirea-interzisa-o80-cm-clasa-ii

Technical specifications

SR 1848-1 code	C37
Name in the standard	No stopping
Type	Prohibition or restriction road sign
Shape and colours	80 cm diameter blue disc with a red border and a red X
Size	Ø80 cm
Format (SR 1848-2)	Large
Material	Galvanised steel sheet, 1 mm
Construction	Pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint

Retroreflective sheeting	Class II (RA2), prismatic, UV-resistant
Retroreflection (white, 0.2°/5°)	250 cd/(lx·m²)
Sheeting service life	10 years (SR 1848-2)
Fixings included	2 clamps, 4 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011, SR 1848-3:2011
Marking	CE

Description

The blue disc with a red border and red X, in the large Ø80 cm format with class II prismatic sheeting. It is used on national roads running through towns and on busy main streets, where any stop blocks a lane.

Why class II

Class II means RA2 prismatic sheeting, which sends back three to four times more light than class I sheeting. It matters on fast roads and wherever the sign is seen at an angle, and in areas with street lighting, shop windows and advertising SR 1848-2 explicitly requires it, alongside class 3. The sheeting has a guaranteed 10-year service life.

Where it goes, under SR 1848-1:2024

It goes on road sections where stopping is prohibited, under the same conditions as the C36 (No parking): at the start of the section, with the P9 additional panel showing the start and length of the zone; without that panel, the prohibition lasts until the first junction. The section can also be marked with the P10, P11 and P12 panels (start, repetition and end of the zone), whose arrows can be applied directly on the sign. Exemptions are shown with the P34 (except residents) or P18 (exempted vehicle categories).

As a general rule, prohibition and restriction signs go just after the junction before the restricted section, so that drivers can choose another route without having to turn back. Along the section, the sign is repeated after every junction, so the prohibition also applies to traffic joining from side roads. If the prohibition starts some distance after the sign, the P4 additional panel with the distance goes under it.

Technical data

- 80 cm diameter blue disc with a red border and a red X;
- 1 mm galvanised steel sheet, with pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class II (RA2) prismatic retroreflective sheeting, resistant to UV and weathering, with a guaranteed 10-year service life;
- fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts;
- CE marked; compliant with SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011 and SR 1848-3:2011.

Mounting and size

Fixings for the post are included: 2 clamps for Ø48 mm posts and 4 bolts with nuts; clamps for Ø60 mm posts are available on request. The bottom edge of the sign goes 1.50–2.50 m above the road or kerb, and the edge nearest the road 0.50–2.0 m from the road platform.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. For temporary use, with no foundation: the Ø48 mm tripod post, 120 cm. On concrete or paving, where you cannot dig: the Ø60 mm flange post, 300 cm, bolted down; for it, ask for the Ø60 mm clamps when you order.

The 80 cm diameter is the large format in SR 1848-2, required on national roads; motorways use the very large 100 cm format. County and local roads, streets and private roads open to public traffic only need the normal Ø60 cm format: the class I sheeting version is the C37.


Drawings and details · 1/3

C37 – Oprirea interzisă

No stopping

Ø80 cm · dimensiunile feței indicatorului

Ø80 cm · sign face dimensions

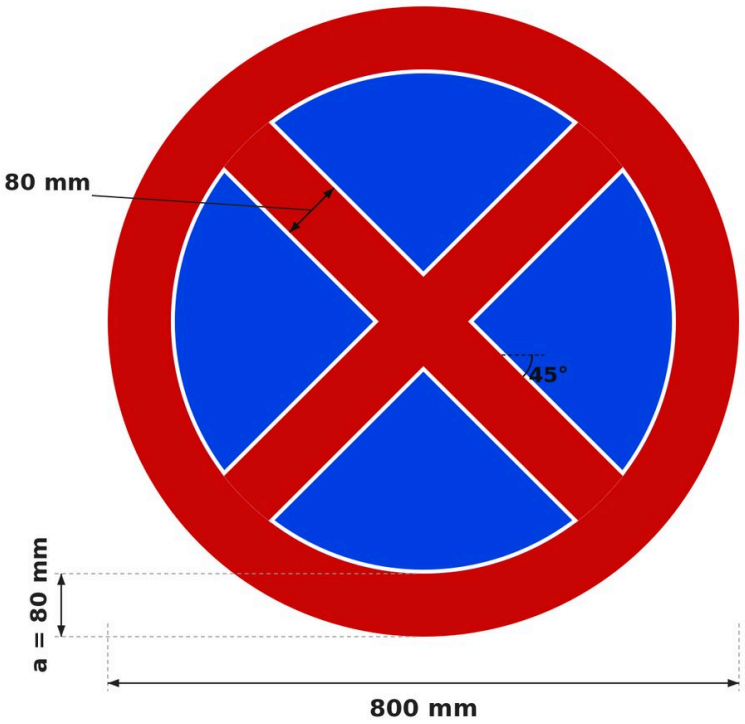

Dimensiuni SR 1848-2 (mm)

SR 1848-2 dimensions (mm)

Ø40 cm

D = 400 · a = 50

drumuri vicinale cu trafic redus

low-traffic local access roads

Ø60 cm

D = 600 · a = 60

drumuri județene, comunale, străzi

county and communal roads, streets

Ø80 cm

D = 800 · a = 80

drumuri naționale

national roads

Ø100 cm

D = 1000 · a = 100

autostrăzi

motorways

Fond albastru, chenar roșu a; cotele sunt ale feței retroreflectorizante.

Blue background, red border a; dimensions of the retroreflective face.

Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).

The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).

Formatul se alege după categoria drumului (SR 1848-2, 5.2).

The format follows the road category (SR 1848-2, 5.2).


Chenarul și dunga roșie: 50 / 60 / 80 / 100 mm (tab. 4); dunga albă de separare 3 / 4 / 5 / 6 mm (tab. 6).

Red border and stripe: 50 / 60 / 80 / 100 mm (table 4); white separating stripe 3 / 4 / 5 / 6 mm (table 6).

Sursa: SR 1848-2:2011, tab. 3, tab. 4 și tab. 6.

Source: SR 1848-2:2011, table 3, table 4 and table 6.


Drawings and details · 2/3

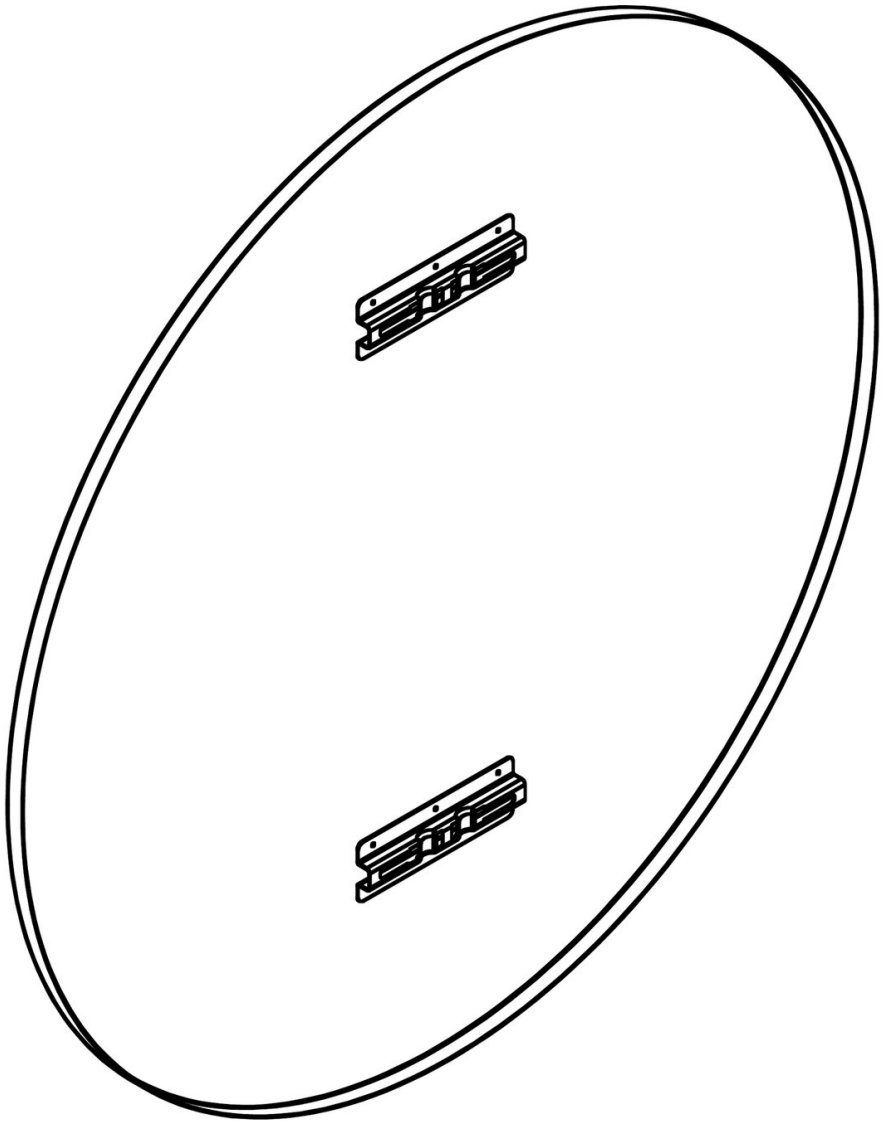

Drawings and details · 3/3

Prindere cu canal și colier, stâlp Ø48 mm

Channel and clamp fixing, Ø48 mm post

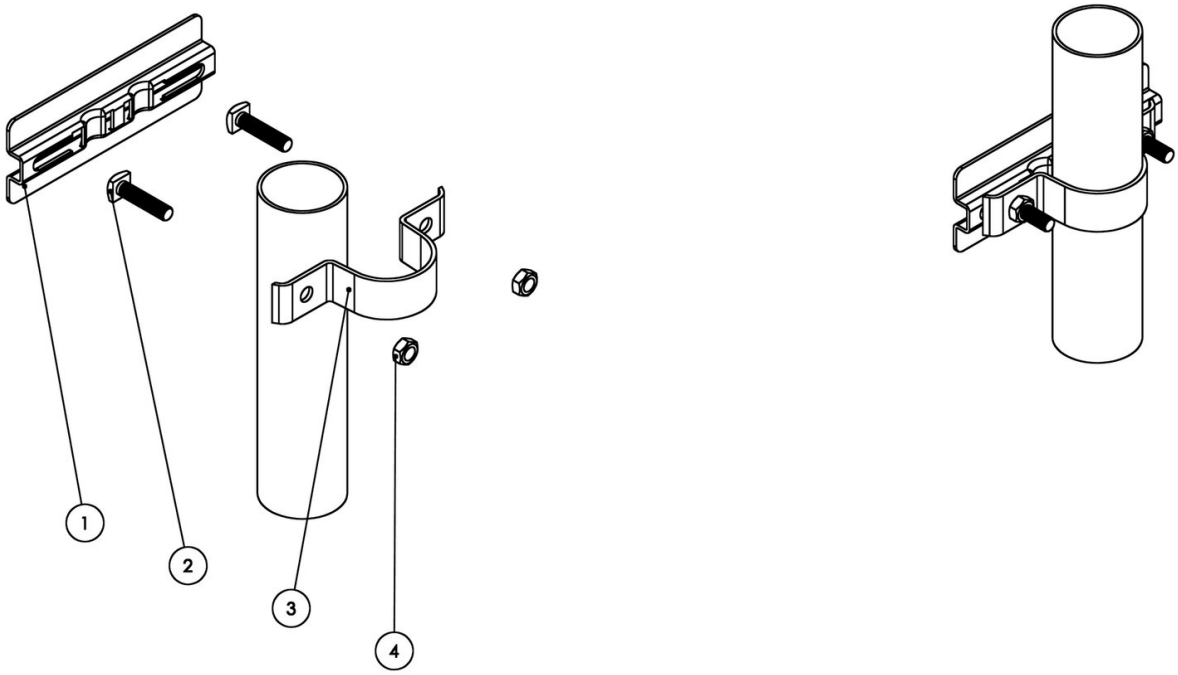

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.