Public Traffic Prohibited Sign, 70×30 cm, Class I

Class I (EGP) Road Signs



AT A GLANCE

- "Public traffic prohibited" sign, for forest roads closed to the public.
- 70 × 30 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 1 clamp for Ø48 mm posts and 2 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**DF-CIRCULATIE**
Category	**Forest Road Signs**
Weight	**2 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/indicator-circulatia-publica-interzisa-70×30-cm-clasa-i

Technical specifications

Type	Special sign for forest roads
Normative	ID-001-15, Annex VII, no. 4
Shape and colours	Red rectangle with a white border and the white words CIRCULAȚIA PUBLICĂ INTERZISĂ
Size	70 × 30 cm
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant
Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)

Sheeting service life	7 years
Fixings included	1 clamp, 2 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-2:2011
Marking	CE

Description

The "Public traffic prohibited" sign shows that a forest road is closed to public traffic: a 70 × 30 cm red panel with a white border and the white words CIRCULAȚIA PUBLICĂ INTERZISĂ on two lines.

Where it goes

Under normative ID-001-15, it goes with the forest road name sign on every road closed to public traffic, on the same post, below it. It is not used on forest roads designated for access to neighbouring villages.

Size and text

The letters are 60 mm high, on two lines, and the text is fixed, not made to order. In the grouping of the normative's Annex VIII, this panel is the lowest on the post, with its bottom edge 1.20 m above the ground.

When class I is used

Class I (RA1) sheeting returns 70 cd/(lx·m²) for white to the driver and has a 7-year service life, enough on roads where headlights are the only light, such as forest roads. In areas with street lighting, shop windows, advertising and dense urban traffic, however, SR 1848-2 requires prismatic class 2 or 3 sheeting.

Technical data

- 70 × 30 cm panel: red rectangle with a white border and the white words CIRCULAȚIA PUBLICĂ INTERZISĂ;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- fixings included: 1 clamp for Ø48 mm posts and 2 bolts with nuts;
- CE marked; sheet, sheeting and construction to SR EN 12899-1:2007 and SR 1848-2:2011.

Mounting

It is sign no. 4 of Annex VII of the forest road maintenance and repair normative ID-001-15, approved by Order 482/2015. Fixings for the post are included: 1 clamp for Ø48 mm posts and 2 bolts with nuts; clamps for Ø60 mm posts are available on request.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. The normative asks for the sign to be clearly visible from 1.50–1.70 m and, when several signs share a post, for the lowest to be at least 1.20 m above the ground.

Drawings and details · 1/3

DF4 – Indicator pentru interzicerea circulației publice

Public traffic prohibited sign

70 x 30 cm · dimensiunile feței indicatorului

70 x 30 cm · sign face dimensions



Dimensiuni (mm) Dimensions (mm)
70 x 30 cm 700 x 300 · r = 30 drumuri forestiere forest roads

Scrisul și chenarul de 15 mm se execută în alb.
Lettering and the 15 mm border are white.

Rânduri: 15 / 60 / H 60 / 30 / H 60 / 60 / 15 mm.
Rows: 15 / 60 / H 60 / 30 / H 60 / 60 / 15 mm.

Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).


Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).
Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).

Scriere SR 1848-3: tip „îngust”, H = 60 mm.
SR 1848-3 lettering: narrow type, H = 60 mm.

Dimensiuni după normativul ID-001-15, anexa VII (Ordinul MMAP 482/2015).
Dimensions from normative ID-001-15, Annex VII (MMAP Order 482/2015).

DF-CIRCULATIE dimensions


Drawings and details · 2/3

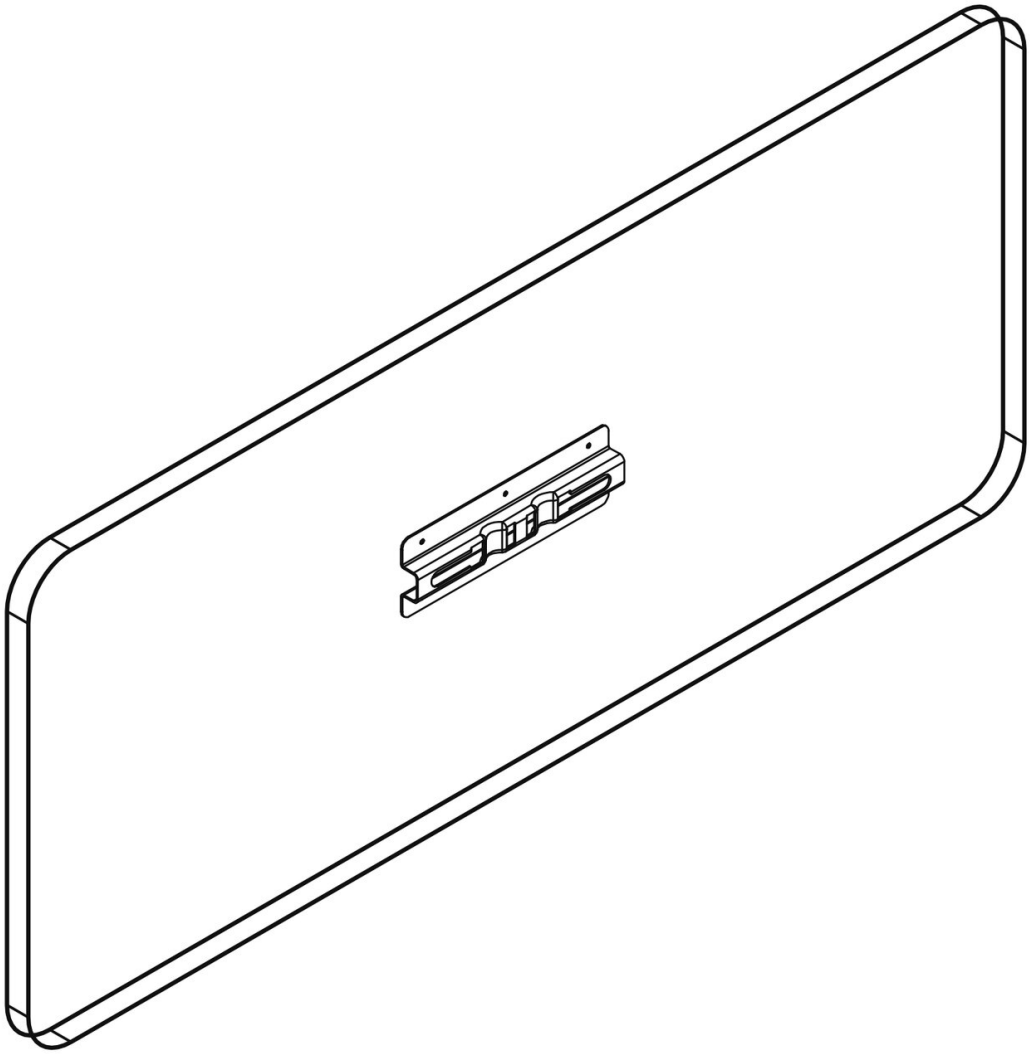

Back of the DF-CIRCULATIE panel

Drawings and details · 3/3

Prindere cu canal și colier, stâlp Ø48 mm
Channel and clamp fixing, Ø48 mm post

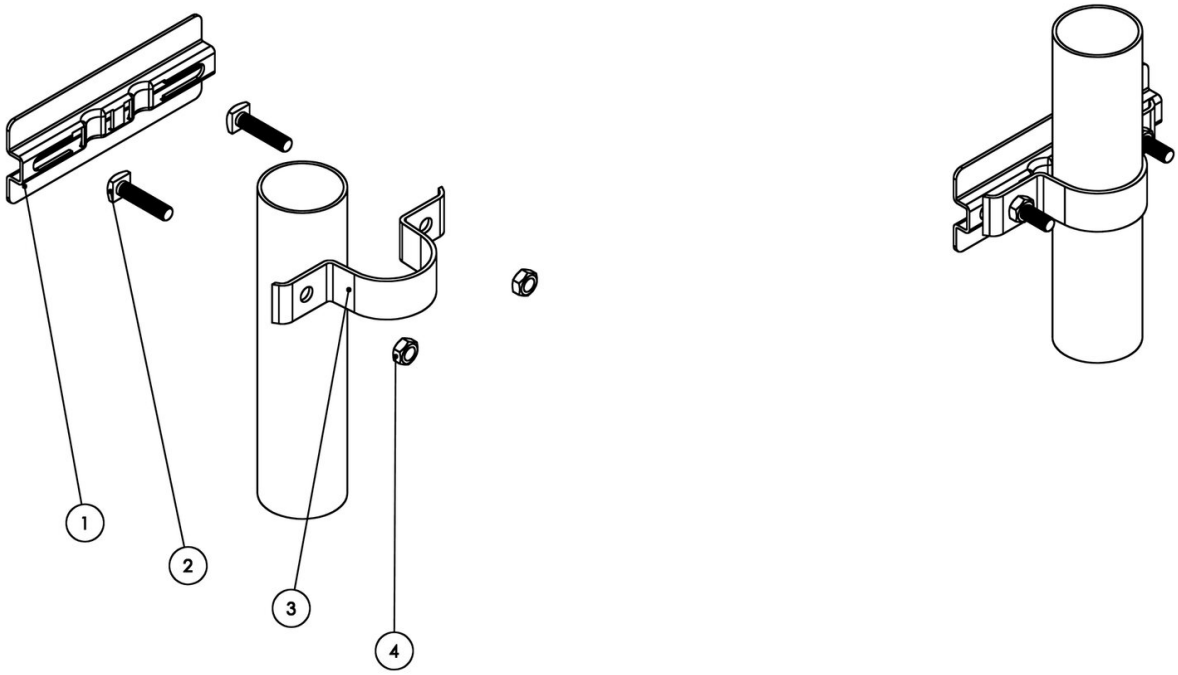

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.

DF-CIRCULATIE fixing system