Forest Road Junction Direction Sign, 103×30 cm, Class I

Class I (EGP) Road Signs



AT A GLANCE

- Arrow-shaped direction sign for forest road junctions, with the road's name made to order.
- 103 × 30 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**DF-ORIENTARE**
Category	**Forest Road Signs**
Weight	**3 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/indicator-orientare-ramificatie-drum-forestier-103×30-cm-clasa-i

Technical specifications

Type	Special sign for forest roads
Normative	ID-001-15, Annex VII, no. 3
Shape and colours	Blue arrow with a white border and the white words DRUM FORESTIER and the road's name
Size	103 × 30 cm
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant
Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)

Sheeting service life	7 years
Fixings included	2 clamps, 4 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-2:2011
Marking	CE

Description

The junction direction sign shows the direction and name of the forest road leaving a junction: a 103 × 30 cm blue arrow-shaped panel with a white border, DRUM FORESTIER on the first line and the road's name on the second.

Where it goes

Under normative ID-001-15, it stands right at the junction of two forest roads inside the network. It is used at every order-2 and order-3 branch, to show both the branch and the road's name, except on link roads. The road number plate can go above it.

Size and text

The panel has an 830 mm body and a 200 mm point, with a 15 mm white border. DRUM FORESTIER is written in 60 mm letters and the name in 100 mm letters. The name is written in full, without abbreviations and with diacritics, as the normative requires; the SR 1848-3 narrow letters are squeezed as much as needed for the name to fit at the normative's height. The pictures show the normative's example, “Valea Bradului”; you send the name and the arrow's direction after ordering.

When class I is used

Class I (RA1) sheeting returns 70 cd/(lx·m²) for white to the driver and has a 7-year service life, enough on roads where headlights are the only light, such as forest roads. In areas with street lighting, shop windows, advertising and dense urban traffic, however, SR 1848-2 requires prismatic class 2 or 3 sheeting.

Technical data

- 103 × 30 cm panel: blue arrow with a white border and the white words DRUM FORESTIER and the road's name;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts;
- CE marked; sheet, sheeting and construction to SR EN 12899-1:2007 and SR 1848-2:2011.

Mounting

It is sign no. 3 of Annex VII of the forest road maintenance and repair normative ID-001-15, approved by Order 482/2015. Fixings for the post are included: 2 clamps for Ø48 mm posts and 4 bolts with nuts; clamps for Ø60 mm posts are available on request.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. The normative asks for the sign to be clearly visible from 1.50–1.70 m and, when several signs share a post, for the lowest to be at least 1.20 m above the ground.

Drawings and details · 1/3

DF3 – Indicator de orientare la ramificații de drumuri forestiere

Forest road junction direction sign

103 x 30 cm · dimensiunile feței indicatorului

103 x 30 cm · sign face dimensions

Dimensiuni (mm)
Dimensions (mm)


103 x 30 cm
1030 x 300 · r = 30
drumuri forestiere
forest roads



Scrisul și chenarul de 15 mm se execută în alb.
Lettering and the 15 mm border are white.
Rânduri: 15 / 30 / H 60 / 50 / H 100 / 30 / 15 mm; corp 810–830 mm, vârf 200 mm.
Rows: 15 / 30 / H 60 / 50 / H 100 / 30 / 15 mm; body 810–830 mm, point 200 mm.
Denumirea drumului se scrie complet, fără prescurtări, cu diacritice; exemplul este cel din normativ.
The road name is written in full, without abbreviations, with diacritics; the example is the one in the normative.
Litere SR 1848-3 tip „îngust", îngustate pe orizontală la 84 %, ca denumirea să încapă la înălțimea din normativ; minimum 30 mm până la chenar.
SR 1848-3 narrow letters, squeezed horizontally to 84 % so the name fits at the normative's height; at least 30 mm to the border.
Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).
Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).
Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).
Scriere SR 1848-3: tip „îngust", H = 60 mm; tip „îngust", H = 100 mm.
SR 1848-3 lettering: narrow type, H = 60 mm; narrow type, H = 100 mm.
Dimensiuni după normativul ID-001-15, anexa VII (Ordinul MMAP 482/2015).
Dimensions from normative ID-001-15, Annex VII (MMAP Order 482/2015).

DF-ORIENTARE dimensions

Drawings and details · 2/3

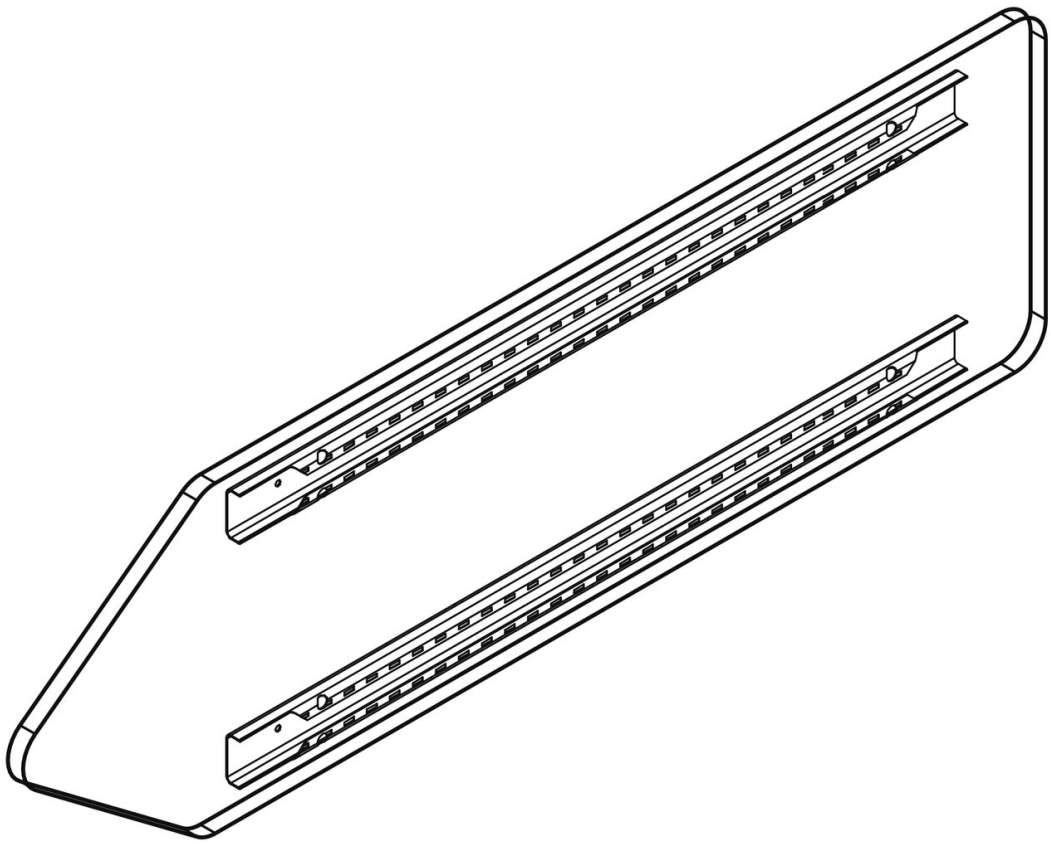


Back of the DF-ORIENTARE panel

Drawings and details · 3/3

Prindere cu profil de rigidizare și colier, stâlp Ø48 mm

Reinforcement rail and clamp fixing, Ø48 mm post

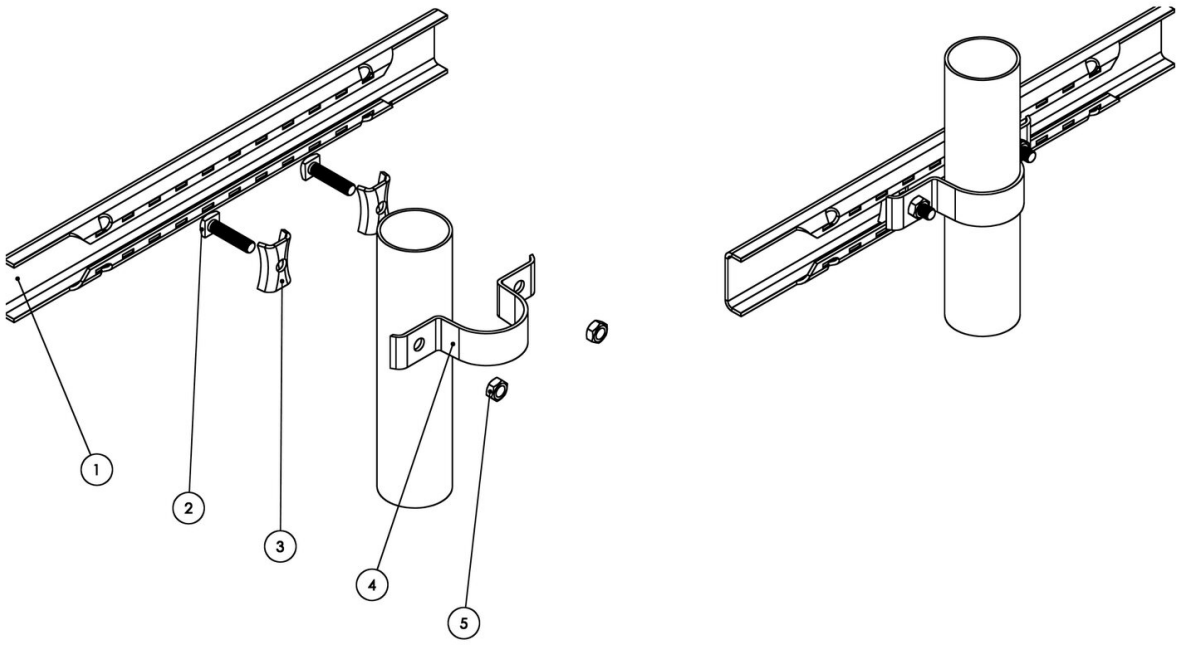

1 Profil de rigidizare din aluminiu (pe spatele panoului)
Aluminium reinforcement rail (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Plăcuță anti-rotire din aluminiu (2 buc.)
Aluminium anti-rotation plate (2 pcs)

4 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

5 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.

DF-ORIENTARE fixing system