Forest Road Junction Advance Sign, 75×50 cm, Class I

Class I (EGP) Road Signs



AT A GLANCE

- Advance sign for major forest road junctions, made to match the real junction.
- 75 × 50 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**DF-PRESEMNALIZARE**
Category	**Forest Road Signs**
Weight	**3.3 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/indicator-presemnalizare-ramificatii-drum-forestier-75×50-cm-clasa-i

Technical specifications

Type	Special sign for forest roads
Normative	ID-001-15, Annex VII, no. 2
Shape and colours	Blue rectangle with a white border, white arrows and the roads' names in white
Size	75 × 50 cm
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant
Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)
Sheeting service life	7 years

Fixings included	2 clamps, 4 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-2:2011
Marking	CE

Description

The advance direction sign for major junctions announces a forest road junction in good time: a 75 × 50 cm blue panel with a white border, with the roads' arrows drawn in white and their names written beside them.

Where it goes

Under normative ID-001-15, it stands on the right-hand side of the forest road, 50 m before major junctions: where a category I road meets a category II road, that is, at order-2 branches.

Size and text

The arrows are drawn to match the real junction: the angles between them follow the roads, and the line thickness shows how important each road is; where the roads are of the same category, the lines are equally thick. In the normative's example, the main road has a 50 mm line with an 80 mm head and the branch a 35 mm line. The letters show importance too: 100 mm for the main road, 60 mm for the branch. The pictures show the normative's example, Sturu and V. Seacă; you send the names and a sketch of the junction after ordering.

When class I is used

Class I (RA1) sheeting returns 70 cd/(lx·m²) for white to the driver and has a 7-year service life, enough on roads where headlights are the only light, such as forest roads. In areas with street lighting, shop windows, advertising and dense urban traffic, however, SR 1848-2 requires prismatic class 2 or 3 sheeting.

Technical data

- 75 × 50 cm panel: blue rectangle with a white border, white arrows and the roads' names in white;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts;
- CE marked; sheet, sheeting and construction to SR EN 12899-1:2007 and SR 1848-2:2011.

Mounting

It is sign no. 2 of Annex VII of the forest road maintenance and repair normative ID-001-15, approved by Order 482/2015. Fixings for the post are included: 2 clamps for Ø48 mm posts and 4 bolts with nuts; clamps for Ø60 mm posts are available on request.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. The normative asks for the sign to be clearly visible from 1.50–1.70 m and, when several signs share a post, for the lowest to be at least 1.20 m above the ground.


Drawings and details · 1/3

DF2 – Indicator de presemnalizare și orientare la ramificații importante de drum forestier

Forest road advance direction sign for major junctions

75 x 50 cm · dimensiunile feței indicatorului

75 x 50 cm · sign face dimensions

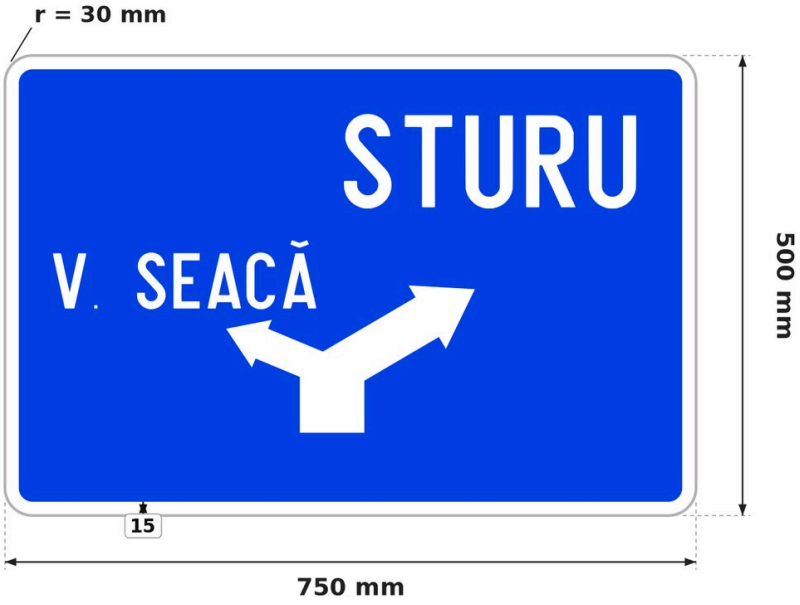


Dimensiuni (mm) Dimensions (mm)
75 x 50 cm 750 x 500 · r = 30 drumuri forestiere forest roads

Scrisul și chenarul de 15 mm se execută în alb.
Lettering and the 15 mm border are white.
Rânduri: 15 / 50 / H 100 / 50 / H 60 / săgeți 160 / 50 / 15 mm.
Rows: 15 / 50 / H 100 / 50 / H 60 / arrows 160 / 50 / 15 mm.
Săgeți: 50 mm drumul principal, 35 mm ramificația, vârf 80 mm; unghiurile urmează ramificația reală.
Arrows: 50 mm main road, 35 mm branch, head 80 mm; the angles follow the real junction.
Așezarea textului și forma săgeților după desenul din anexa VII; scriere tip „îngust”, cea mai apropiată de lățimile din desen.
Text and arrow layout as in the Annex VII drawing; narrow lettering, the closest to the drawing's widths.
Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).
Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).
Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).
Scriere SR 1848-3: tip „îngust”, H = 100 mm; tip „îngust”, H = 60 mm.
SR 1848-3 lettering: narrow type, H = 100 mm; narrow type, H = 60 mm.
Dimensiuni după normativul ID-001-15, anexa VII (Ordinul MMAP 482/2015).
Dimensions from normative ID-001-15, Annex VII (MMAP Order 482/2015).

DF-PRESEMNALIZARE dimensions

Drawings and details · 2/3

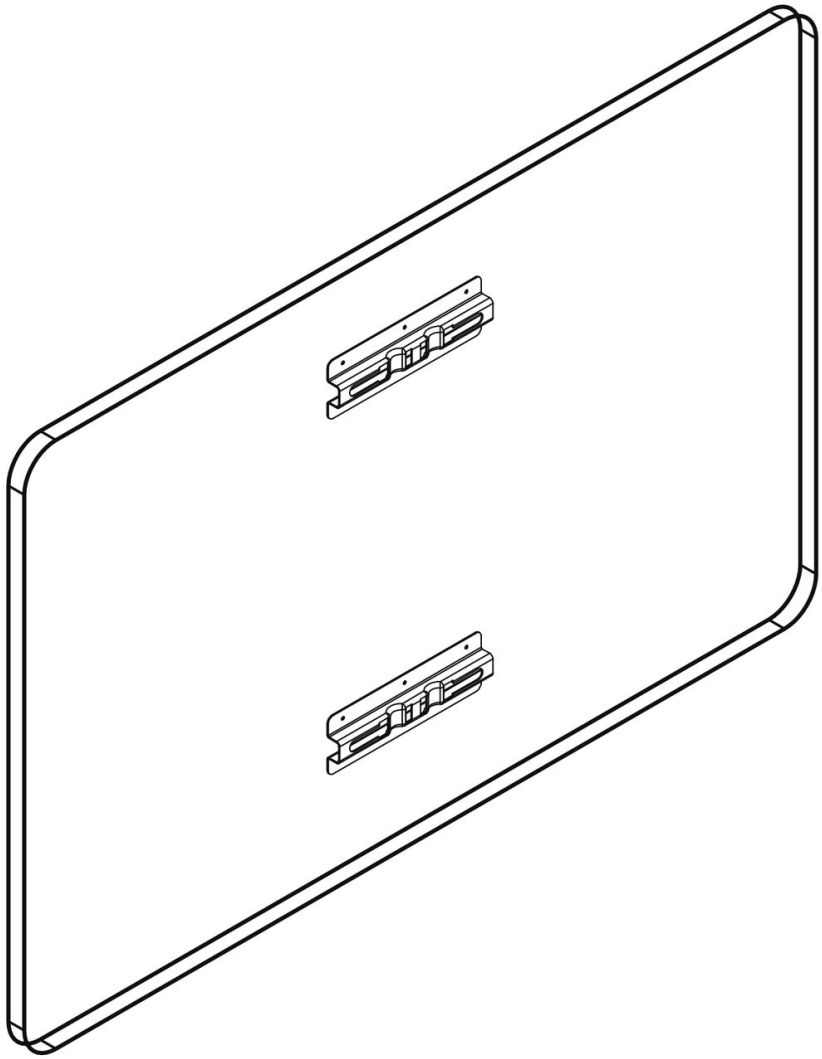


Back of the DF-PRESEMNALIZARE panel

Drawings and details · 3/3

Prindere cu canal și colier, stâlp Ø48 mm

Channel and clamp fixing, Ø48 mm post

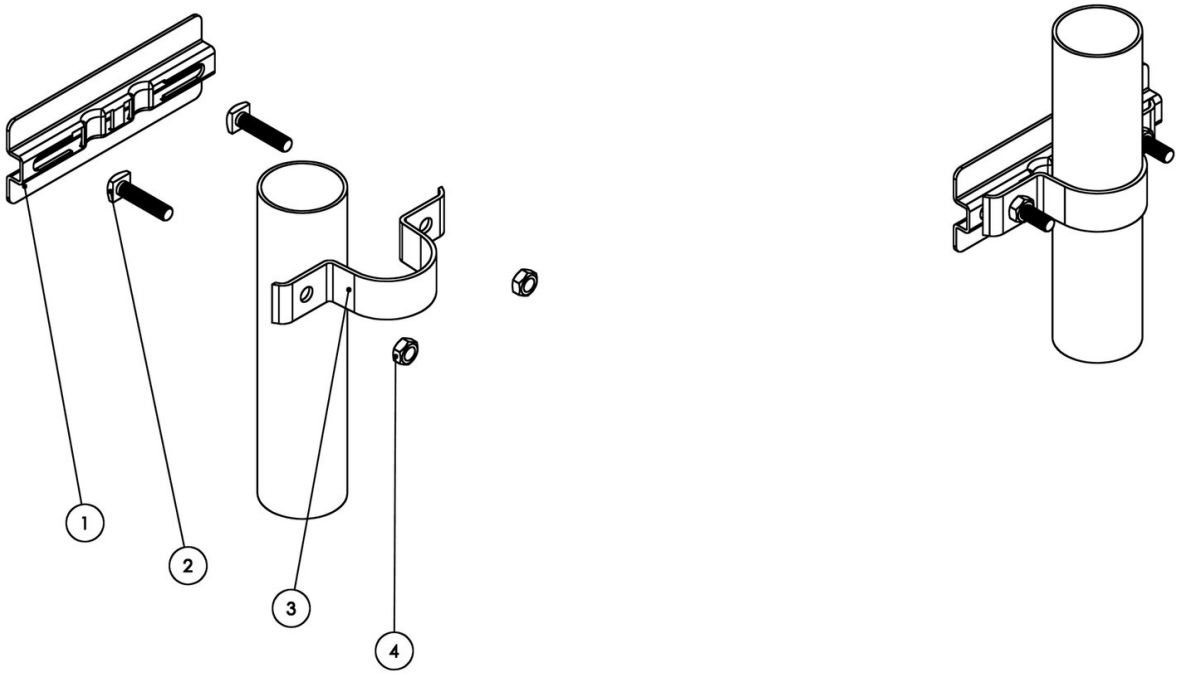

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.

DF-PRESEMNALIZARE fixing system