U32 Temporary Sign – Series of Work Sites, 180×120 cm, Class II

Signs compliant with SR 1848-1:2024



AT A GLANCE

- Temporary road sign U32 “Series of work sites”, to SR 1848-1:2024.
- 180×120 cm yellow panel with the words “Drum în lucru” (road works), in 1 mm galvanised steel sheet.
- Class II (RA2) prismatic sheeting, guaranteed 10-year service life.
- Fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts.

Product code	**U32_II**
Category	**Metal Road Signs (Class II)**
Weight	**17 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/indicator-u32-succesiune-de-puncte-de-lucru-180×120-cm-clasa-ii

Technical specifications

SR 1848-1 code	U32
Name in the standard	Series of work sites
Type	Temporary road sign
Shape and colours	180×120 cm yellow panel with the words “Drum în lucru” (road works), the roadworks, speed limit and uneven road signs, and the length of the section
Size	180×120 cm
Printed values	40 km/h, 7 km (other values to order)
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class II (RA2), prismatic, UV-resistant

Retroreflection (white, 0.2°/5°)	250 cd/(lx·m²)
Sheeting service life	10 years (SR 1848-2)
Fixings included	4 clamps, 8 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011, SR 1848-3:2011
Marking	CE

Description

The large 180×120 cm panel that tells drivers at the outset that several work sites follow on the same section, with the speed limit and the length of the section. Class II prismatic sheeting keeps it legible from far away on national roads.

Why class II

Class II (RA2) prismatic sheeting shows up three to four times better at night than class I sheeting, even among plant lights and street lights. For temporary signing, SR 1848-2 adds a clear rule: a temporary sign must have at least the retroreflection class of the permanent signs on the section, so on roads already signed in class II it is the compliant choice.

Where it goes, under SR 1848-1:2024

It goes on roads where a section with a series of work sites must be announced. The panel does not replace the signing of each work site, which is still signed separately.

What the roadworks rules require (Order 1112/411/2000)

The sign belongs to the advance signing, which is installed first, ahead of the work zone in the direction of travel, with at least 50 cm of clear space outside the carriageway. The rules require signs to be stood on the ground first, to check that they are clearly visible, and only then fixed to a support; no more than two signs go on the same support or side by side, and on one-way roads or bends they can be repeated on the left side or above the road.

On public roads, works are signed under the methodological rules approved by Order MI/MT no. 1112/411/2000. The road closure or traffic restriction is approved by the road authority, with the traffic police's agreement, on the basis of a signing layout endorsed as final, a copy of which the contractor keeps at the work site. The contractor installs, completes and maintains the signing for the whole job, removes it at the end and restores the original signing; accidents caused by incomplete or missing temporary signing are entirely the contractor's responsibility.

At night, if the existing signing on the road is retroreflective, the temporary signing must be retroreflective too and can be supplemented with flashing or sequential (“cascade”) amber lamps; on main and connecting streets in towns, retroreflective temporary signs are supplemented with flashing amber lamps.

Technical data

- 180×120 cm yellow panel with the words “Drum în lucru” (road works), the roadworks, speed limit and uneven road signs, and the length of the section;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted;
- class II (RA2) prismatic retroreflective sheeting, with a guaranteed 10-year service life;
- fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts;
- compliant with SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011 and SR 1848-3:2011.

Mounting and size

Fixings for the post are included: 2 clamps for Ø48 mm posts and 4 bolts with nuts; clamps for Ø60 mm posts are available on request. The bottom edge of the sign goes 1.50–2.50 m above the road or kerb, and the edge nearest the road 0.50–2.0 m from the road platform.


SR 1848-2 sets a single size for this panel, 180×120 cm; the class I sheeting version, the same size, is the U32.

Drawings and details · 1/3

U32 – Succesiune de puncte de lucru

Series of work sites

180 x 120 cm · dimensiunile feței indicatorului
180 x 120 cm · sign face dimensions

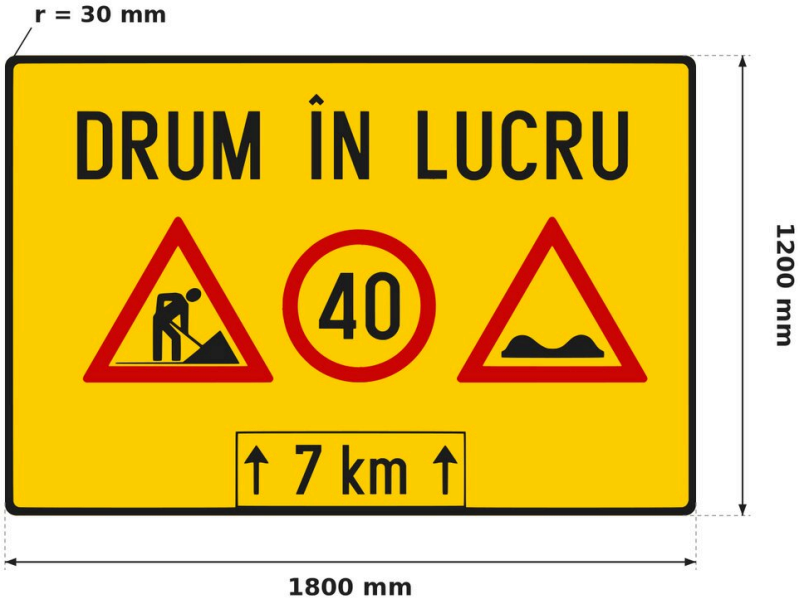

Dimensiuni SR 1848-2 (mm)
SR 1848-2 dimensions (mm)

180 x 120 cm
1800 x 1200 · r = 30
toate drumurile
all roads

Indicator temporar: fond galben; cotele sunt ale feței retroreflectorizante.
Temporary sign: yellow background; dimensions of the retroreflective face.

Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).


Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).
Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).

Latura triunghiului 50 cm; diametrul cercului 40 cm.
Triangle side 50 cm; circle diameter 40 cm.

Scriere SR 1848-3: tip „îngust", H = 178 mm; tip „îngust", H = 173 mm; tip „îngust", H = 129 mm.
SR 1848-3 lettering: narrow type, H = 178 mm; narrow type, H = 173 mm; narrow type, H = 129 mm.

Sursa: SR 1848-2:2011, tab. 12.
Source: SR 1848-2:2011, table 12.


Drawings and details · 2/3

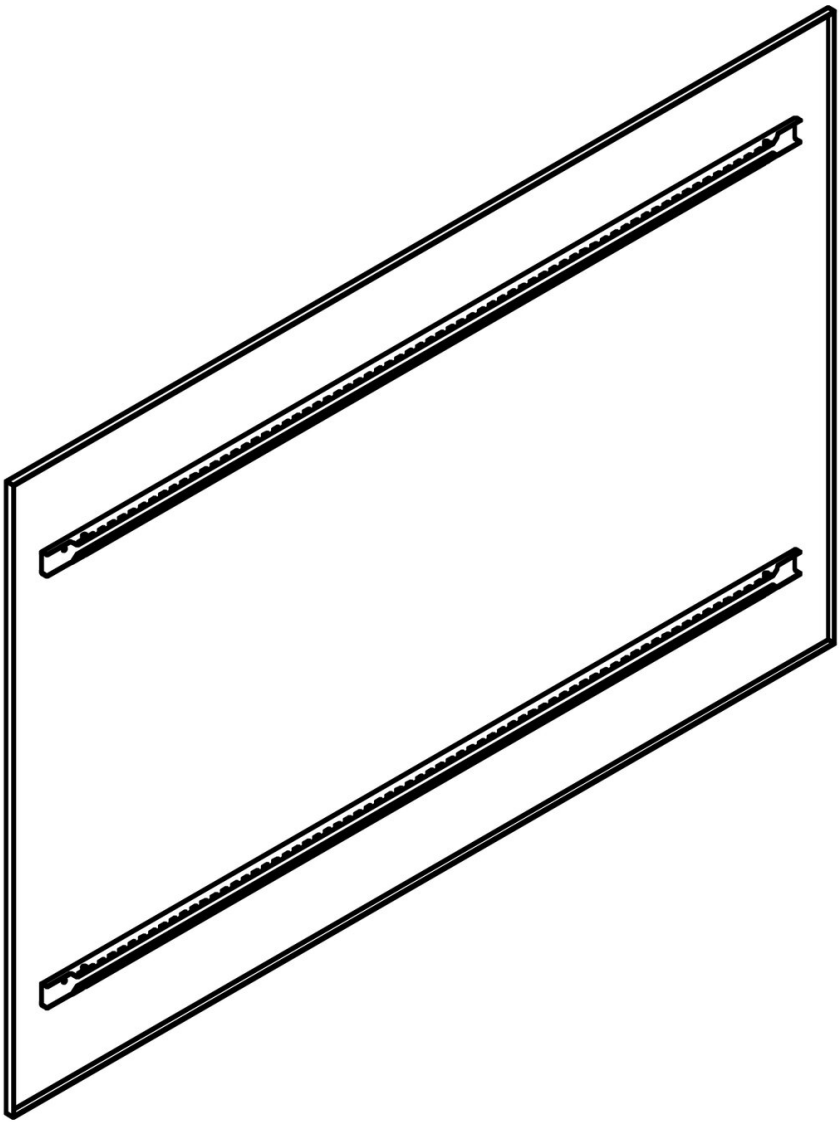

Drawings and details · 3/3

Prindere cu profil de rigidizare și colier, stâlp Ø48 mm

Reinforcement rail and clamp fixing, Ø48 mm post

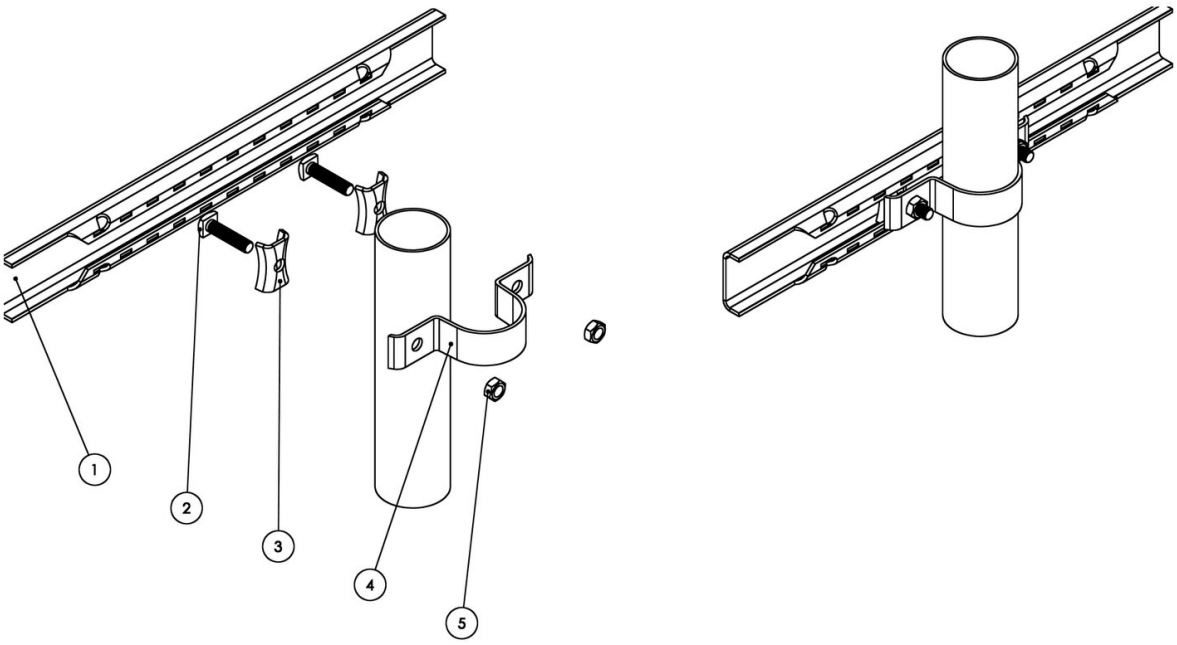

1 Profil de rigidizare din aluminiu (pe spatele panoului)
Aluminium reinforcement rail (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Plăcuță anti-rotire din aluminiu (2 buc.)
Aluminium anti-rotation plate (2 pcs)

4 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

5 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.