
Rubber Speed Bump, 50×40×4.5 cm, 2 Reflective Strips

Signs compliant with SR 1848-1:2024

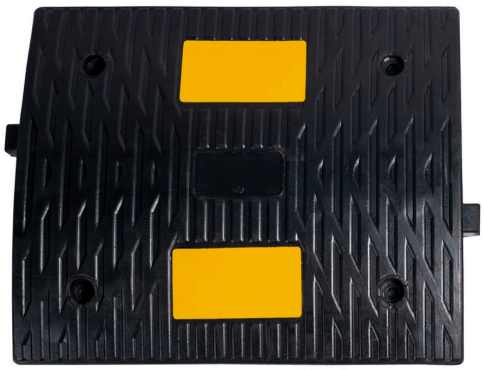

AT A GLANCE

- Black rubber, 50 × 40 × 4.5 cm, 6.3 kg.
- For limiting speed to 30 km/h.
- 2 yellow reflective strips.
- 2 pieces per metre; 4 anchors and 4 bolts included.

Product code	**V19-400**
Category	**Speed Bumps**
Weight	**6.3 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/limitator-de-viteza-din-cauciuc-50×40×4-5-cm-2-benzi-reflectorizante

Technical specifications

Material	Rubber
Limitation	30 km/h
Reflective	2 Glass Bead Strips, RAL 1023
Color	Black
Installation	4 Dowels, 4 Screws

Description

This is our narrowest rubber speed bump: 40 cm in the direction of travel and 4.5 cm high. Cars roll over it without stopping, but the driver feels the need to slow down, and the product sheet rates it for 30 km/h.

How a row goes together

Each piece is 50 cm long, so 2 pieces fit in one metre of road. They lock together by the keys on the sides, and a rounded end cap, the V19-401, goes at each end so the wheels never meet a square edge. Each piece is fixed with 4 anchors and 4 bolts, included in the box.

Visibility

Each piece carries 2 yellow reflective strips that show in the headlights. The black rubber surface is ribbed.

Where it goes

In supermarket car parks, residential courtyards, petrol station entrances and the lanes in front of schools and nurseries, the places where 30 km/h is already too fast.


If you want something wider

The V19-500 is also rated for 30 km/h, but it is 50 cm wide and has 4 reflective strips.

Drawings and details · 1/4

Dimensiuni: 50 x 40 x 4,5 cm
Dimensions: 50 x 40 x 4.5 cm

V19-400

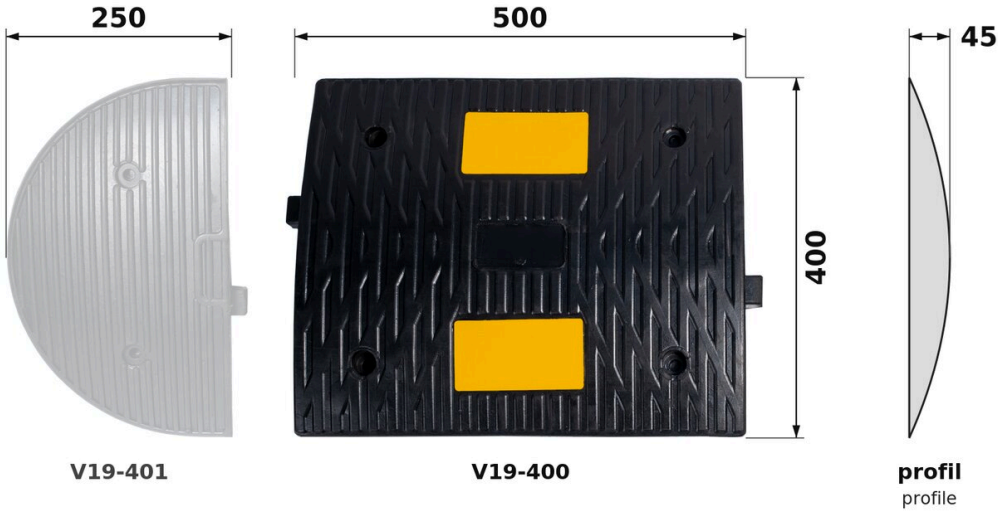

Dimensiuni în mm. Cauciuc negru, 6,3 kg; 4 dibluri + 4 șuruburi incluse. Profilul este orientativ.
Dimensions in mm. Black rubber, 6.3 kg; 4 dowels + 4 screws included. The profile is indicative.
2 benzi reflectorizante cu microbile de sticlă, galben RAL 1023. Capacul V19-401 se comandă separat.
2 glass bead reflective strips, yellow RAL 1023. The V19-401 end cap is ordered separately.


V19-400 dimensions

Drawings and details · 2/4

Cum se montează un rând

V19-400

How a row goes together

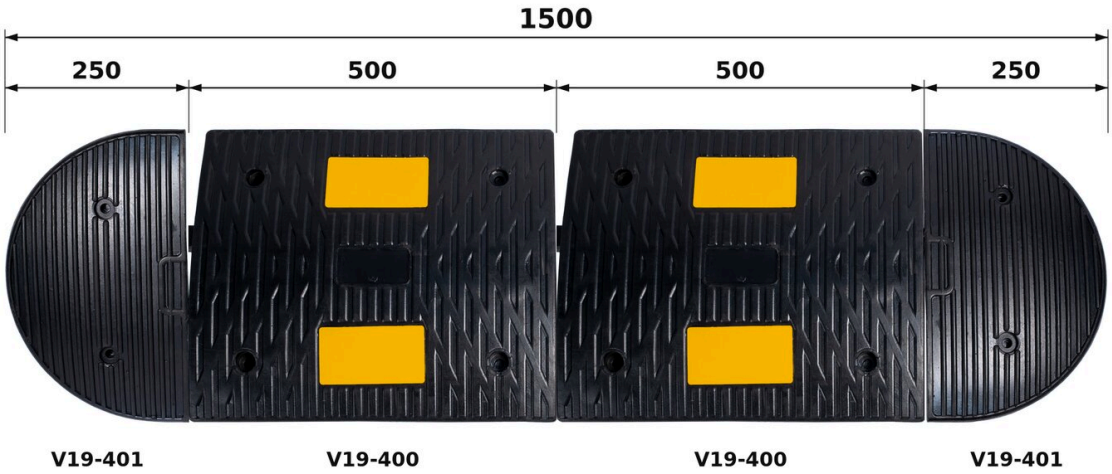

Dimensiuni în mm. 2 limitatoare pe metru; câte un capac la fiecare capăt. Piesele se îmbină prin cheile de pe laterale.

Dimensions in mm. 2 bumps per metre; one end cap at each end. The pieces join through the keys on their sides.

Pentru 3 m: 6 x V19-400 + 2 x V19-401; cu tot cu capace, rândul are 3,5 m.

For 3 m: 6 x V19-400 + 2 x V19-401; with the end caps the row is 3.5 m long.

V19-400: how it is fitted

Drawings and details · 3/4

Detalii: benzi reflectorizante, prindere, îmbinare

V19-400

Details: reflective strips, fixing, joint



bandă cu microbile de sticlă, galben RAL 1023
glass bead strip, yellow RAL 1023



gaură de prindere
fixing hole



cheie de îmbinare
joining key



suprafață striată, antiderapantă
ribbed, anti-slip surface

Fiecare bucată se fixează în asfalt sau beton cu 4 dibluri și 4 șuruburi, incluse.
Each piece is fixed to asphalt or concrete with 4 dowels and 4 screws, included.

V19-400 details

Drawings and details · 4/4


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




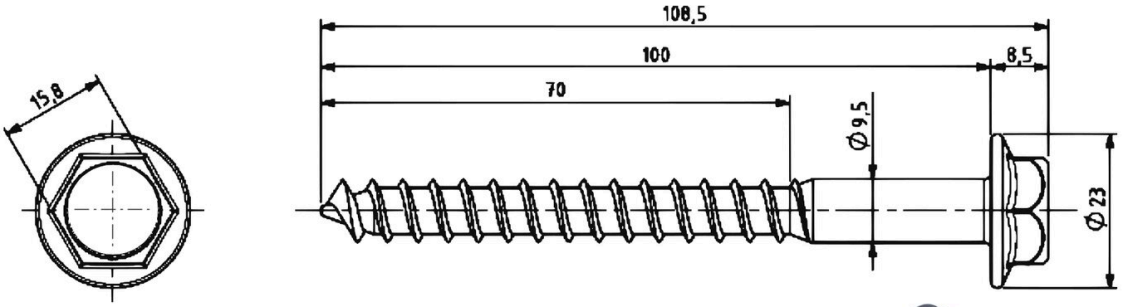



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

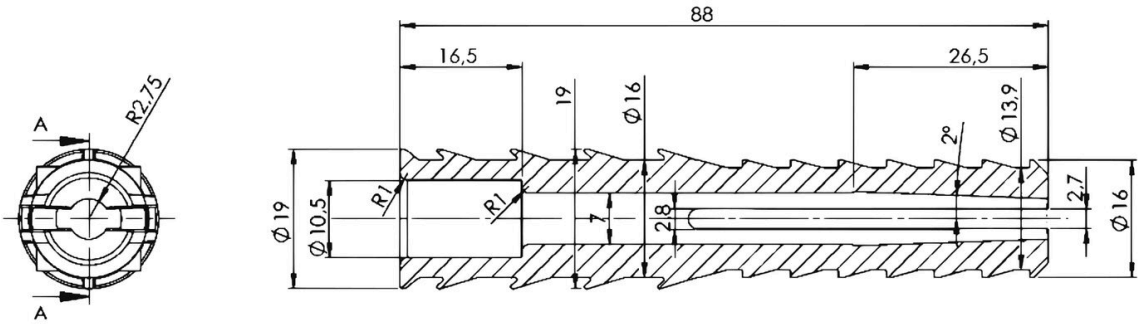

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

V19-400 fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel