Rubber Speed Bump, 50×60×4.5 cm, 6 Reflective Strips

Signs compliant with SR 1848-1:2024



AT A GLANCE

- Black rubber, 50 × 60 × 4.5 cm, 8.8 kg.
- For limiting speed to 20 km/h.
- 6 yellow reflective strips.
- 2 pieces per metre; 4 anchors and 4 bolts included.

Product code	**V19-600**
Category	**Speed Bumps**
Weight	**8.8 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/limitator-de-viteza-din-cauciuc-50×60×4-5-cm-6-benzi-reflectorizante

Technical specifications

Material	Rubber
Limitation	20 km/h
Reflective	6 Glass Bead Strips, RAL 1023
Color	Black
Installation	4 Dowels, 4 Screws

Description

The wider a bump is in the direction of travel, the longer the car stays on it and the lower the speed at which crossing it stays comfortable. At 60 cm wide, the V19-600 is rated for 20 km/h, against 30 km/h for the 40 and 50 cm models.

Where it goes

- on the lanes of underground and shopping-centre car parks;
- in residential areas, on streets where children play;
- on internal warehouse roads shared with pedestrians;
- in front of barriers and checkpoints.

Construction

Black rubber, 4.5 cm high, 8.8 kg a piece. It has 6 yellow reflective strips and a ribbed surface. It fixes at 4 points with the anchors and bolts in the box.

The complete row

Two pieces fit per metre. For the ends you use the V19-601 cap, which has the same 60 cm width.


Other 60 cm options

The ATZ 45600 has the same width but is made of compound/rubber, with 4 reflective strips and fixing at 5 points.

Drawings and details · 1/4

Dimensiuni: 50 x 60 x 4,5 cm
Dimensions: 50 x 60 x 4.5 cm

V19-600

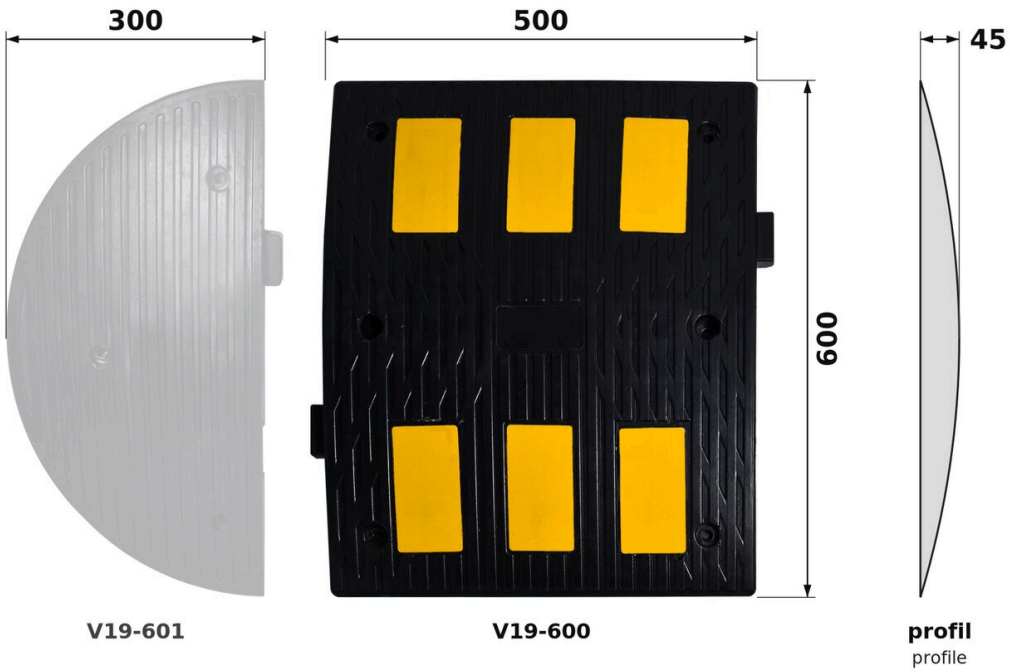

Dimensiuni în mm. Cauciuc negru, 8,8 kg; 4 dibluri + 4 șuruburi incluse. Profilul este orientativ.
Dimensions in mm. Black rubber, 8.8 kg; 4 dowels + 4 screws included. The profile is indicative.
6 benzi reflectorizante cu microbile de sticlă, galben RAL 1023. Capacul V19-601 se comandă separat.
6 glass bead reflective strips, yellow RAL 1023. The V19-601 end cap is ordered separately.


V19-600 dimensions

Drawings and details · 2/4

Cum se montează un rând

V19-600

How a row goes together

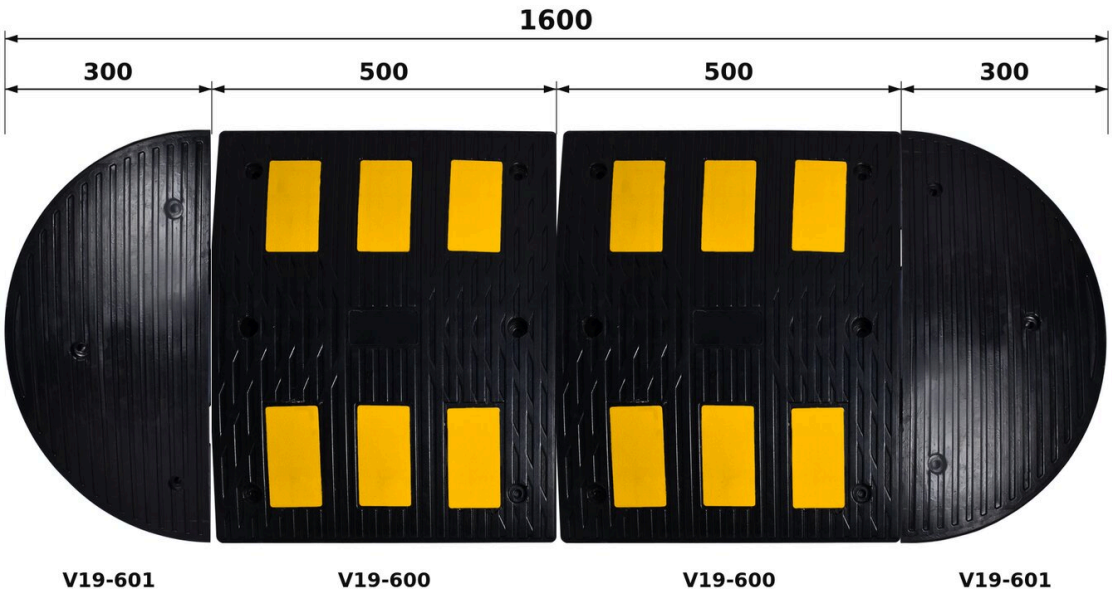

Dimensiuni în mm. 2 limitatoare pe metru; câte un capac la fiecare capăt. Piesele se îmbină prin cheile de pe laterale.

Dimensions in mm. 2 bumps per metre; one end cap at each end. The pieces join through the keys on their sides.

Pentru 3 m: 6 x V19-600 + 2 x V19-601; cu tot cu capace, rândul are 3,6 m.

For 3 m: 6 x V19-600 + 2 x V19-601; with the end caps the row is 3.6 m long.

V19-600: how it is fitted

Drawings and details · 3/4

Detalii: benzi reflectorizante, prindere, îmbinare

V19-600

Details: reflective strips, fixing, joint



bandă cu microbile de sticlă, galben RAL 1023
glass bead strip, yellow RAL 1023



gaură de prindere
fixing hole



cheie de îmbinare
joining key



suprafață striată, antiderapantă
ribbed, anti-slip surface

Fiecare bucată se fixează în asfalt sau beton cu 4 dibluri și 4 șuruburi, incluse.
Each piece is fixed to asphalt or concrete with 4 dowels and 4 screws, included.

V19-600 details

Drawings and details · 4/4


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




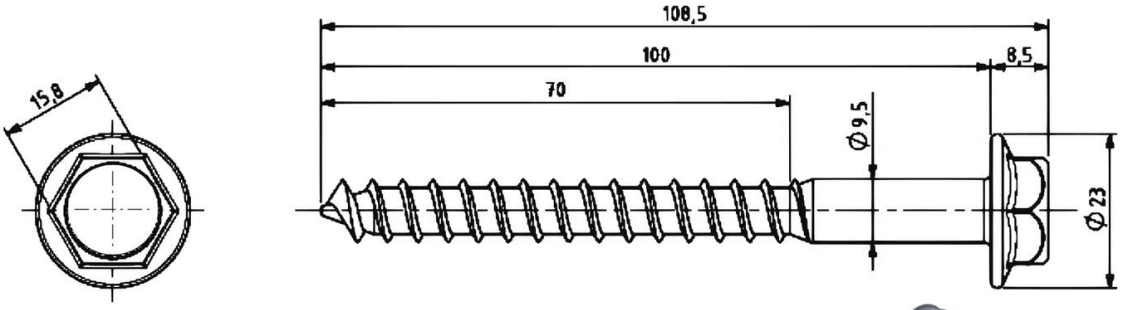



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

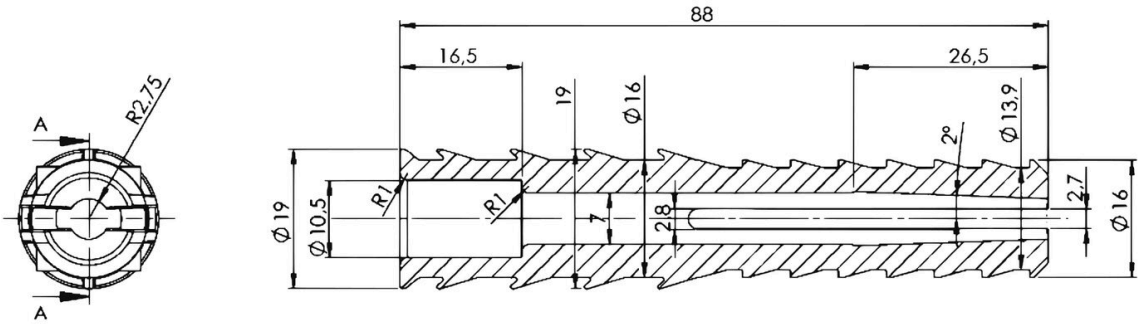

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

V19-600 fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel