Rubber Compound Speed Bump, 50×40×4 cm, 4 Reflective Strips

PREMIUM | Signs compliant with SR 1848-1:2024



AT A GLANCE

- Black compound/rubber, 50 × 40 × 4 cm, 5.9 kg.
- For limiting speed to 30 km/h.
- 4 reflective strips.
- 2 pieces per metre; 4 anchors and 4 bolts included.

Product code	**ATZ 40400**
Category	**Speed Bumps**
Brand	**Atto Trafic**
Weight	**5.9 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/limitator-de-viteza-din-cauciuc-compound-50×40×4-cm-4-benzi-reflectorizante

Technical specifications

Material	Compound/Rubber
Limitation	30 km/h
Color	Black
Reflective	4 Glass Bead Strips, RAL 1023
Installation	4 Dowels, 4 Screws

Description

It has the same width in the direction of travel as the V19-400 rubber bump, 40 cm, and the same speed, 30 km/h, but it is lighter: 5.9 kg instead of 6.3 kg, and a little lower, 4 cm against 4.5 cm. It has 4 reflective strips instead of 2.

Material

It is black compound/rubber with a chevron-textured surface and a joining key on the side.

Fitting

- 2 pieces per metre of road;
- 4 anchors and 4 bolts per piece, included;
- ends: the ATZ 40401 cap, one at each edge.

Where it is used

On car park lanes, in residential courtyards, at petrol station entrances and at company access points, where you want traffic held to 30 km/h, with a low crossing of only 4 cm.


The wider version

In the same material, the ATZ 45600 is 60 cm in the direction of travel and 4.5 cm high.

Drawings and details · 1/4

Dimensiuni: 50 x 40 x 4 cm
Dimensions: 50 x 40 x 4 cm

ATZ 40400

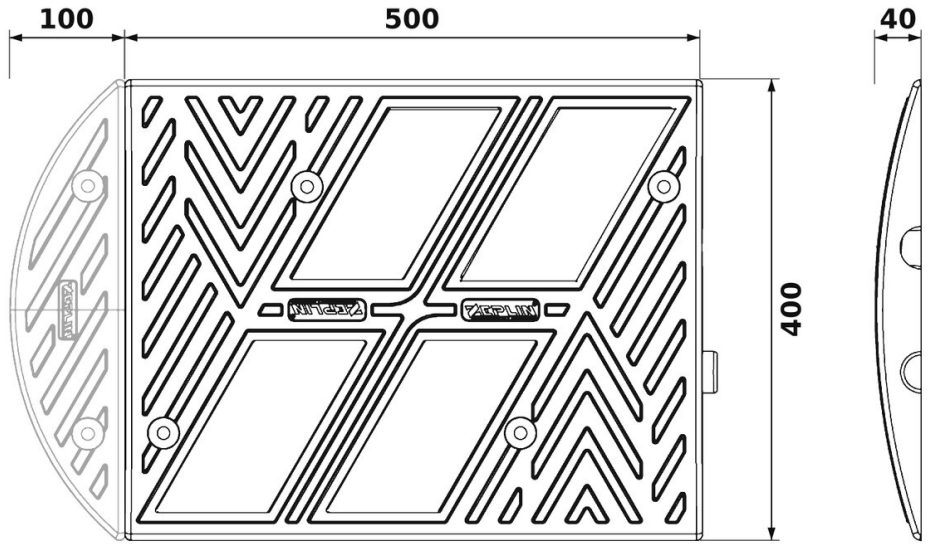

ATZ 40401 **ATZ 40400** **profil**
profile


Dimensiuni în mm. PVC compound peste schelet din PPC; 5,9 kg; 4 dibluri + 4 șuruburi incluse.
Dimensions in mm. PVC compound over a PPC skeleton; 5.9 kg; 4 dowels + 4 screws included.
4 benzi cu microbile de sticlă, galben RAL 1023. Rezistă între -20 °C și +60 °C. Capacul ATZ 40401 se comandă separat.
4 glass bead strips, yellow RAL 1023. Withstands -20 °C to +60 °C. The ATZ 40401 end cap is ordered separately.

ATZ 40400 dimensions

Drawings and details · 2/4

Cum se montează un rând **ATZ 40400**

How a row goes together

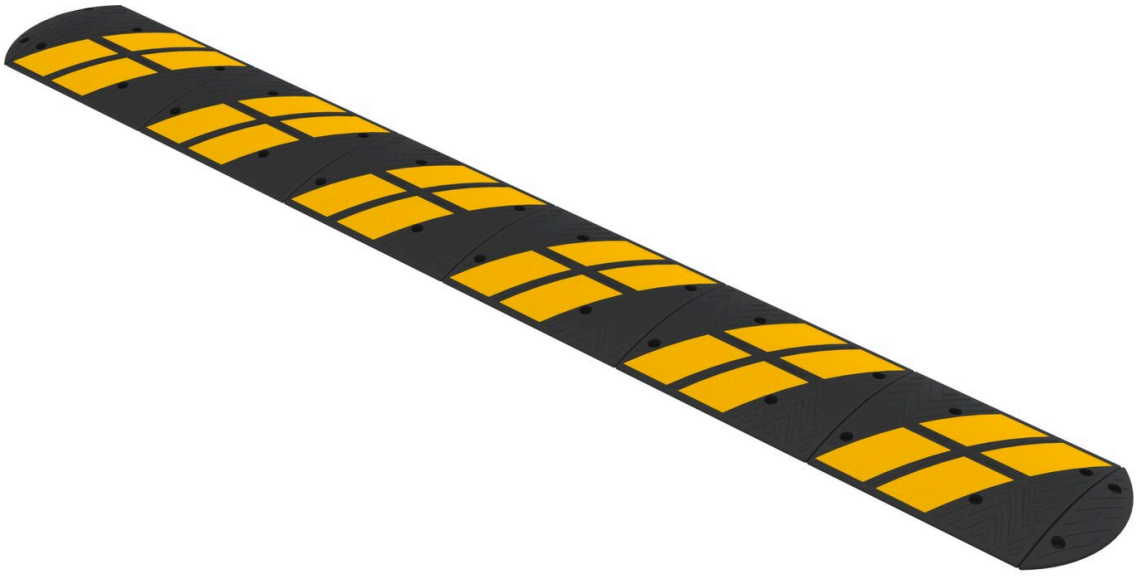



2 limitatoare pe metru; câte un capac la fiecare capăt. Piesele se îmbină prin cheile de pe laterale.
2 bumps per metre; one end cap at each end. The pieces join through the keys on their sides.
Pentru 3 m: 6 x ATZ 40400 + 2 x ATZ 40401; cu tot cu capace, rândul are 3,2 m.
For 3 m: 6 x ATZ 40400 + 2 x ATZ 40401; with the end caps the row is 3.2 m long.

ATZ 40400: how it is fitted

Drawings and details · 3/4

Detalii: benzi reflectorizante, prindere, îmbinare

ATZ 40400

Details: reflective strips, fixing, joint



bandă cu microbile de sticlă, galben RAL 1023
glass bead strip, yellow RAL 1023



gaură de prindere
fixing hole



cheie de îmbinare
joining key



locaș pentru cheia piesei următoare
slot for the key of the next piece

Fiecare bucată se fixează în asfalt sau beton cu 4 dibluri și 4 șuruburi, incluse.
Each piece is fixed to asphalt or concrete with 4 dowels and 4 screws, included.

ATZ 40400 details

Drawings and details · 4/4


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




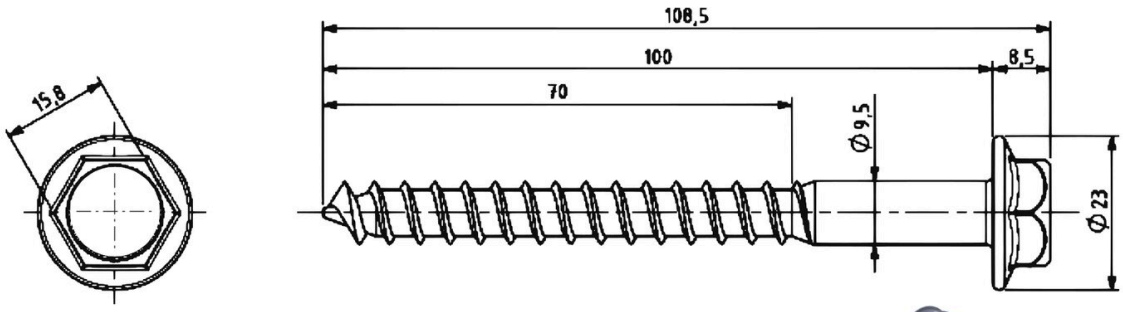



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

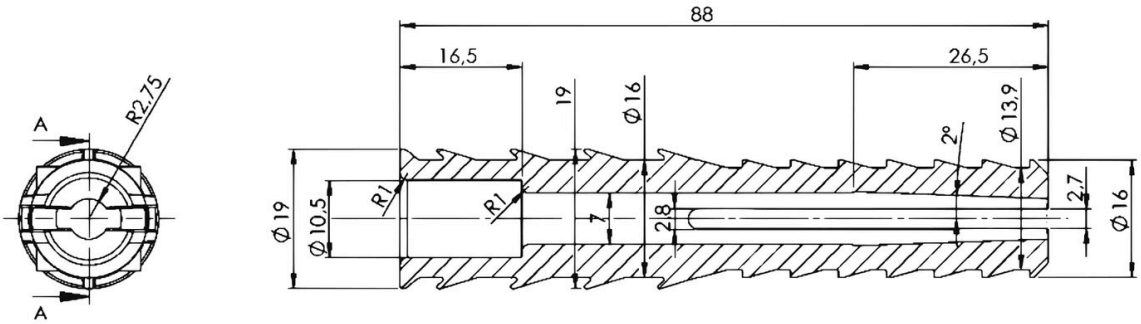

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

ATZ 40400 fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel