Rubber Compound Speed Bump, 50×60×4.5 cm, 4 Reflective Strips

PREMIUM | Signs compliant with SR 1848-1:2024



AT A GLANCE

- Black compound/rubber, 50 × 60 × 4.5 cm, 9 kg.
- 4 reflective strips.
- 2 pieces per metre; 5 anchors and 5 bolts included.
- End cap: ATZ 45601.

Product code	**ATZ 45600**
Category	**Speed Bumps**
Brand	**Atto Trafic**
Weight	**9 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/limitator-de-viteza-din-cauciuc-compound-50×60×4-5-cm-4-benzi-reflectorizante

Technical specifications

Material	Compound/Rubber
Limitation	50 km/h
Color	Black
Reflective	4 Glass Bead Strips, RAL 1023
Installation	5 Dowels, 5 Screws

Description

This is the wider version of the ATZ 40400: 60 cm in the direction of travel instead of 40 cm, 4.5 cm high and 9 kg a piece. The surface has a chevron texture carrying 4 reflective strips in two pairs.

Fixed at 5 points

Over a 60 cm width, each piece fixes at 5 points, with 5 anchors and 5 bolts included in the box. The pieces lock together by the keys on the sides.

A row

- 2 pieces per metre;
- at each end, the 15 cm ATZ 45601 cap;
- drill the holes once the whole row is laid out.

Where it is used

On internal roads in industrial parks, at the entrances of large car parks, on long residential lanes and anywhere you want a longer crossing than the 40 cm bumps give.


Compared with the V19-600

The V19-600 rubber bump has the same 60 cm width, but 6 reflective strips and fixing at 4 points.

Drawings and details · 1/4

Dimensiuni: 50 x 60 x 4,5 cm
Dimensions: 50 x 60 x 4.5 cm

ATZ 45600

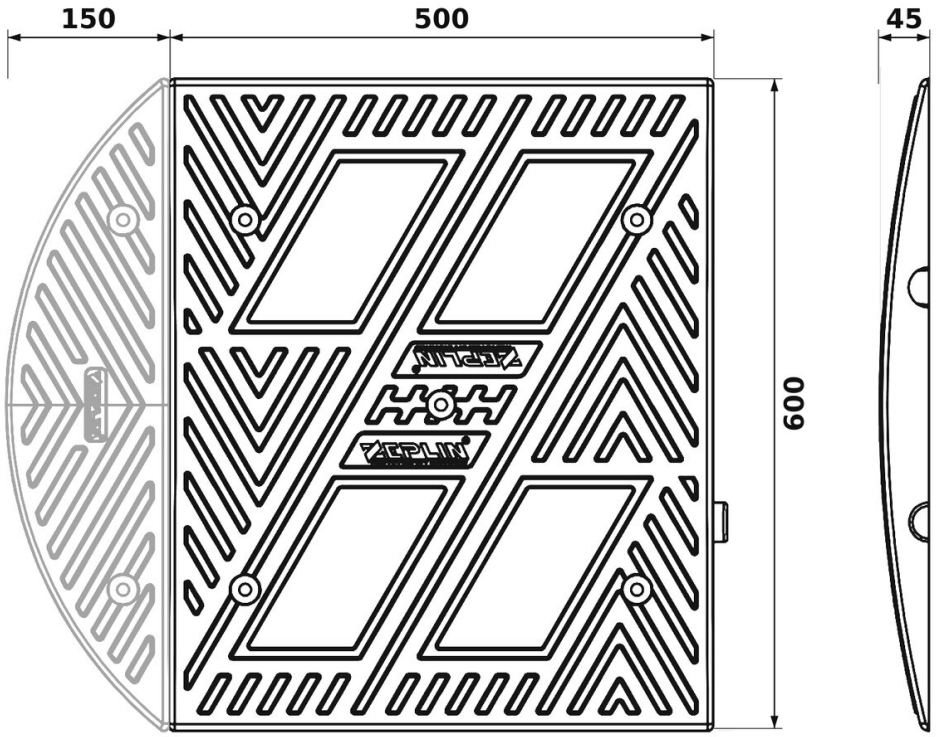

ATZ 45601 **ATZ 45600** **profil**
profile

Dimensiuni în mm. PVC compound peste schelet din PPC; 9 kg; 5 dibluri + 5 șuruburi incluse.
Dimensions in mm. PVC compound over a PPC skeleton; 9 kg; 5 dowels + 5 screws included.
4 benzi cu microbile de sticlă, galben RAL 1023. Rezistă între -20 °C și +60 °C. Capacul ATZ 45601 se comandă separat.
4 glass bead strips, yellow RAL 1023. Withstands -20 °C to +60 °C. The ATZ 45601 end cap is ordered separately.

ATZ 45600 dimensions

Drawings and details · 2/4

Cum se montează un rând

How a row goes together

ATZ 45600



ATZ 45600
limitator / speed bump

ATZ 45601
capac de capăt / end cap

2 limitatoare pe metru; câte un capac la fiecare capăt. Piesele se îmbină prin cheile de pe laterale.
2 bumps per metre; one end cap at each end. The pieces join through the keys on their sides.
Pentru 3 m: 6 x ATZ 45600 + 2 x ATZ 45601; cu tot cu capace, rândul are 3,3 m.
For 3 m: 6 x ATZ 45600 + 2 x ATZ 45601; with the end caps the row is 3.3 m long.

ATZ 45600: how it is fitted

Drawings and details · 3/4

Detalii: benzi reflectorizante, prindere, îmbinare

ATZ 45600


Details: reflective strips, fixing, joint



bandă cu microbile de sticlă, galben RAL 1023
glass bead strip, yellow RAL 1023



gaură de prindere
fixing hole

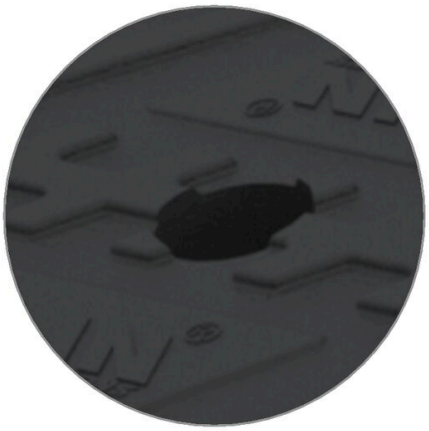

a cincea gaură, la mijloc
the fifth hole, in the middle



cheie de îmbinare
joining key

Fiecare bucată se fixează în asfalt sau beton cu 5 dibluri și 5 șuruburi, incluse.
Each piece is fixed to asphalt or concrete with 5 dowels and 5 screws, included.

ATZ 45600 details

Drawings and details · 4/4


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




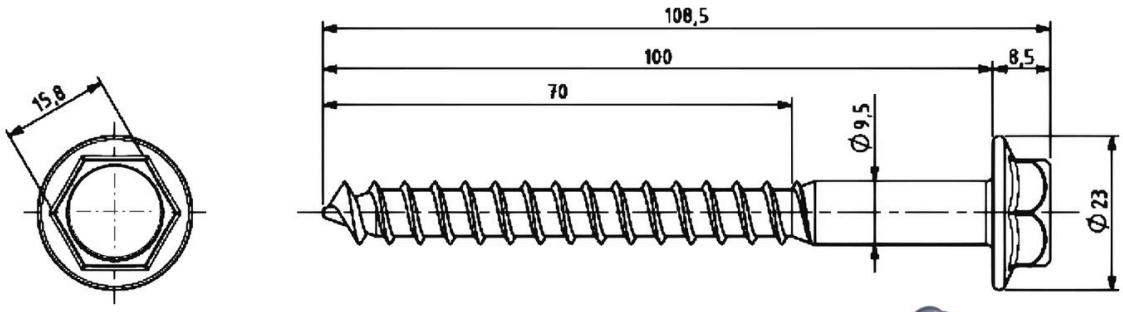



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

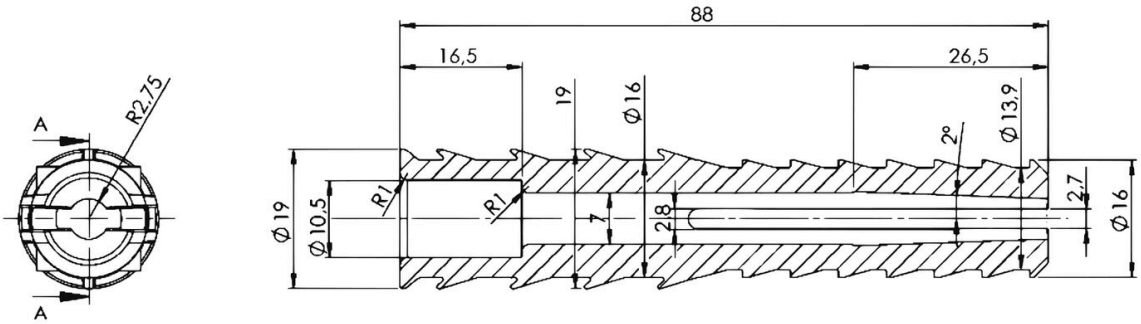

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

ATZ 45600 fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel