
Tactile Guidance Marking for the Visually Impaired, Black, 30×60×0.8 cm

Anti-slip

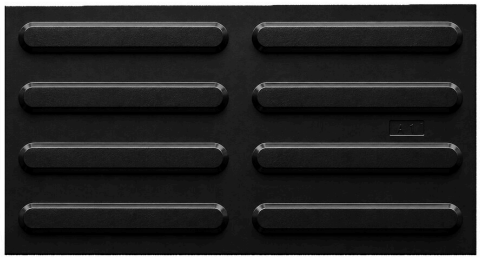

AT A GLANCE

- Tactile guidance marking, black RAL 9017.
- TPU, 30 × 60 × 0.8 cm, 0.90 kg.
- Ribs parallel to the long side, non-slip surface.
- Installed with epoxy adhesive (not included).

Product code	**ATE 8017**
Category	**Tactile Surfaces**
Weight	**0.9 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/marcaj-tactil-de-ghidare-pentru-nevazatori-negru-30×60×0-8-cm

Technical specifications

Material	TPU (thermoplastic polyurethane)
Color	Black (RAL 9017)
Length	60 cm
Width	30 cm
Relief height	4 mm
Tactile pattern	8 parallel bars (4 × 2)
Centre-to-centre spacing	75 mm
Service temperature	−20 °C to +60 °C
Weight	0.90 kg
Mounting System	Epoxy adhesive (not included)

Description

The ATE 8017 is the 30 × 60 cm guidance marking in black RAL 9017. It is chosen for light-coloured floors, where a black tile gives partially sighted people better contrast than a yellow one.

How it is laid

The raised ribs run parallel to the long side, so the tile goes down with its 60 cm side along the direction of travel. It is bonded with epoxy adhesive, bought separately.

Technical data

TPU (thermoplastic polyurethane), 30 × 60 cm, 0.8 cm thick, 0.90 kg, non-slip surface.

Worked example

An 18 m corridor with a tactile route down the middle takes 30 tiles. Compared with the 30 × 30 cm format, the number of pieces halves, and so does the number of joints.

Same family

The ATE 8015 is the black STOP marking in the same format, for stopping areas. In yellow, the 30 × 60 cm guidance marking is the ATE 8016.


Drawings and details · 1/3

ATE 8017 – Marcaj tactil de ghidare, 30 x 60 cm, negru

ATE 8017 Tactile guidance marker, 30 x 60 cm, black


300 x 600 mm · dimensiunile produsului

300 x 600 mm · product dimensions

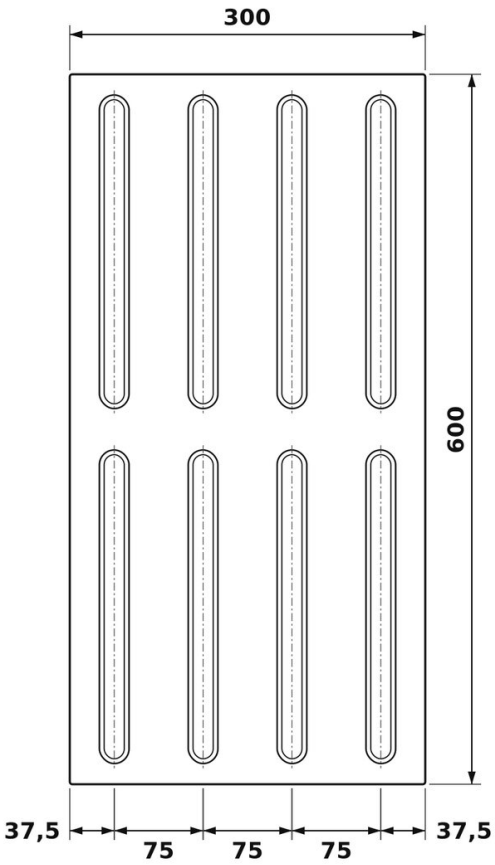

Secțiune prin bară (mărit)

Section through a bar (enlarged)



Dimensiuni în mm. 8 bare paralele (4 x 2), la 75 mm între axe, în relief de 4 mm.

Dimensions in mm. 8 parallel bars (4 x 2), 75 mm apart (centre to centre), 4 mm high.

TPU (poliuretan termoplastic), negru RAL 9017, 0,90 kg; suprafață antiderapantă.

TPU (thermoplastic polyurethane), black RAL 9017, 0.90 kg; non-slip surface.

Materialul rezistă între −20 °C și +60 °C. Se lipește cu adeziv epoxidic (nu este inclus).

The material withstands −20 °C to +60 °C. Bonded with epoxy adhesive (not included).

ATE 8017 dimensions: 300 × 600 mm, 8 bars 75 mm apart, 4 mm relief


Drawings and details · 2/3

Cum se așază plăcile de ghidare

How the guidance tiles are laid

La trecerea de pietoni

At a pedestrian crossing

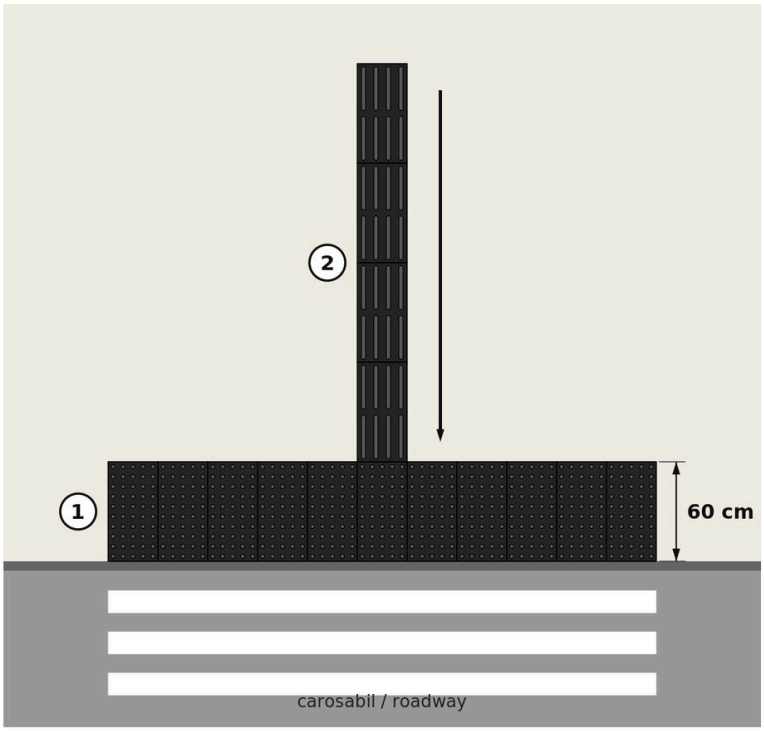

1. Bandă de avertizare (butoni): aici te oprești.
   Warning band (studs): stop here.

2. Traseu de ghidare (bare): barele pe direcția de mers.
   Guidance route (bars): bars along the walking direction.

La scări și rampe, unde nivelul se schimbă, NP 051-2012 cere galben (IV.7.2): ATE 8016.
On stairs and ramps, where the level changes, NP 051-2012 asks for yellow (IV.7.2): ATE 8016.

NP 051-2012: la trecerile de pietoni, benzi de ghidaj pe traseul pietonal (IV.4.1); lățimea benzii nu este stabilită.
NP 051-2012: at pedestrian crossings, guidance strips along the pedestrian route (IV.4.1); the strip width is not set.

Barele arată drumul: placa se pune cu barele paralele cu direcția de mers.
The bars show the way: lay the tile with the bars parallel to the walking direction.


Galben la schimbările de nivel (IV.7.2); placa trebuie să contrasteze cu pardoseala.
Yellow where the level changes (IV.7.2); the tile must contrast with the floor.

Where the guidance tiles go, per NP 051-2012

Drawings and details · 3/3

Montaj: se lipește cu adeziv epoxidic

Installation: bonded with epoxy adhesive

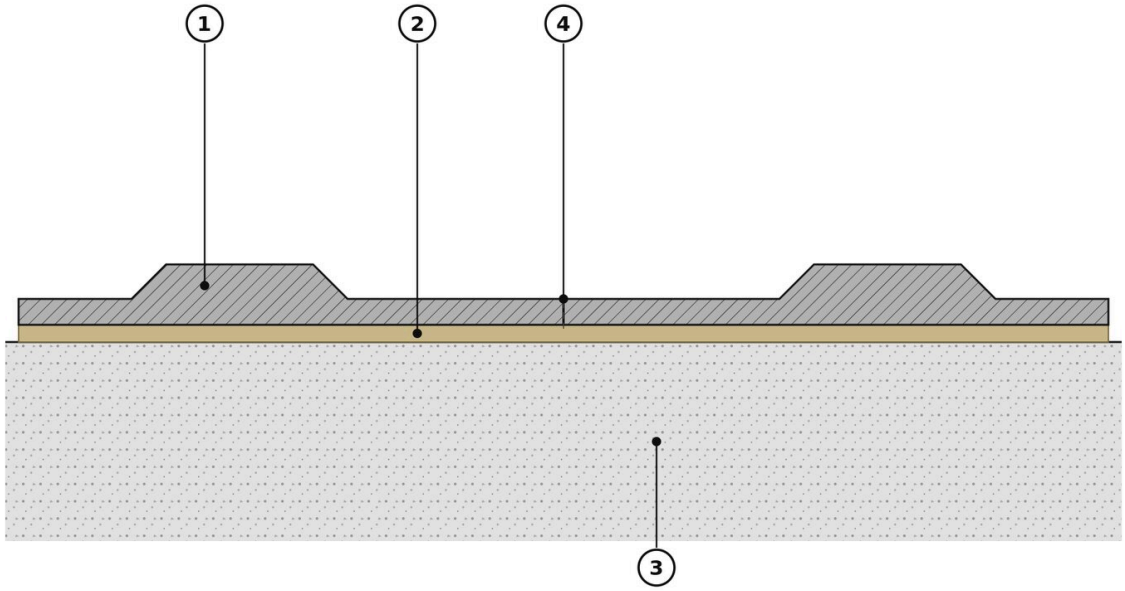

1 Placa tactilă: TPU, relief de 4 mm.
The tactile tile: TPU, 4 mm relief.

2 Adeziv epoxidic – nu este inclus. Pregătirea suprafeței și timpul de întărire: după instrucțiunile adezivului.
Epoxy adhesive – not included. Surface preparation and curing time: as the adhesive instructions say.

3 Pardoseala finită: nu se dau găuri și nu se pun șuruburi – placa doar se lipește.
The finished floor: no drilling and no screws – the tile is only glued down.

4 Plăcile vecine se pun cap la cap, la același nivel.
Neighbouring tiles are laid edge to edge, at the same level.

Installing ATE 8017: bonded to the finished floor with epoxy adhesive