Rubber Parking Wheel Stop, 60×12×10 cm



AT A GLANCE

- Black rubber, 60 × 12 × 10 cm, 4.5 kg.
- Three yellow reflective panels on the side facing the car.
- Fixes down at 3 points, with Ø16 × 90 mm anchors and Ø10 x 110 mm bolts included.
- We recommend 2 per parking space, one for each wheel.

Product code	**ATZ R6012**
Category	**Parking Wheel Stops**
Brand	**Atto Trafic**
Weight	**4.5 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/opritor-roata-parcare-din-cauciuc-60×12×10-cm

Technical specifications

Material	Rubber
Weight	4.50 kg
Dimensions L X W X H	60 × 12 × 10 cm
Color	Black
Reflective	Reflective Tape
Mounting System	Dowels Ø16 × 90 mm (x3), Screws Ø10×110 mm (x3)

Description

A 60 cm stop catches one wheel. On a normal parking space you fit two, one in front of each front wheel, at the distance you want the bumper to stay from the wall or kerb. That is also what we recommend: 2 per space.

It is made of black rubber, measures 60 × 12 × 10 cm and weighs 4.5 kg. The side facing the car has three yellow reflective panels, a wide one in the middle and two narrow ones at the ends, which pick up the headlights when you pull into the garage after dark.

Fitting

There are three fixing holes, and the box contains 3 anchors Ø16 × 90 mm and 3 bolts Ø10 × 110 mm. Put the stop in place, mark the holes, drill into the concrete or asphalt with a hammer drill and a 16 mm bit, push in the anchors and tighten the bolts.

Where it fits

A home garage, a bay in an underground car park, a rented space next to a block of flats or a company yard: anywhere cars park nose-first towards a wall, a fence or a shop window.

Rubber or PPC?

At the same length we also sell the ATZ 1560, made of PPC. It weighs 2 kg and fixes at 2 points. The rubber stop is heavier at 4.5 kg, fixes at 3 points and is slightly narrower: 12 cm against 15 cm. Both are 10 cm high.

Drawings and details · 1/4

Dimensiuni
Dimensions
mm

ATZ R6012



Cauciuc negru, 3 zone reflectorizante galbene pe fața dinspre mașină. Greutate 4,5 kg.
Black rubber, 3 yellow reflective zones on the side facing the car. Weight 4.5 kg.
Se prinde în 3 puncte: 3 dibluri Ø16 x 90 mm și 3 șuruburi Ø10 x 110 mm, incluse.
Fixed at 3 points: 3 Ø16 x 90 mm dowels and 3 Ø10 x 110 mm screws, included.

ATZ R6012 dimensions

Drawings and details · 2/4

Detalii
Details

ATZ R6012



Zona reflectorizantă din mijloc
Middle reflective zone



Gaură de prindere
Fixing hole



Capăt, cu zonă reflectorizantă îngustă
End piece with a narrow reflective zone




Cauciuc striat
Ribbed rubber

ATZ R6012 details

Drawings and details · 3/4

Cum se folosește
How it is used


ATZ R6012

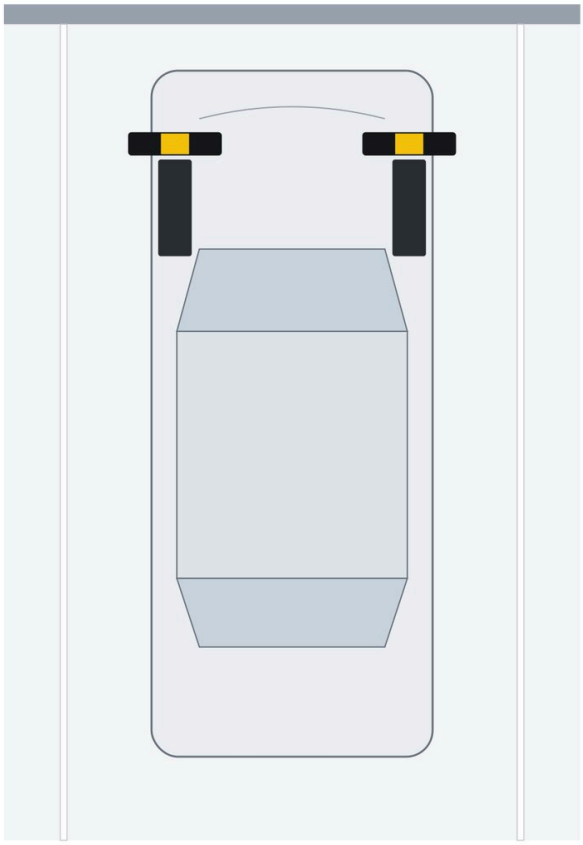

Vedere de sus
Seen from above

2 bucăți pe un loc de parcare
2 pieces for one parking place

Câte una în dreptul fiecărei roți din față.
One in front of each front wheel.

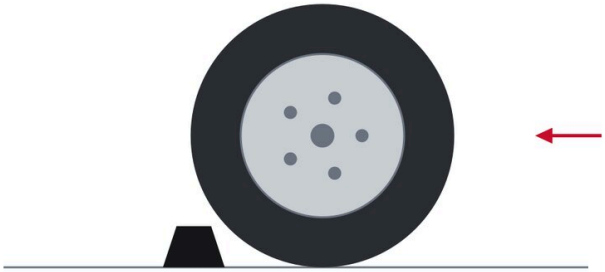

Vedere din lateral
Seen from the side

Găurile se dau în beton sau asfalt, cu bormașină cu percuție și burghiu de 16 mm. Diblurile și șuruburile sunt incluse.
Holes are drilled in concrete or asphalt, with a hammer drill and a 16 mm bit. Dowels and screws are included.

ATZ R6012: how it is used

Drawings and details · 4/4


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




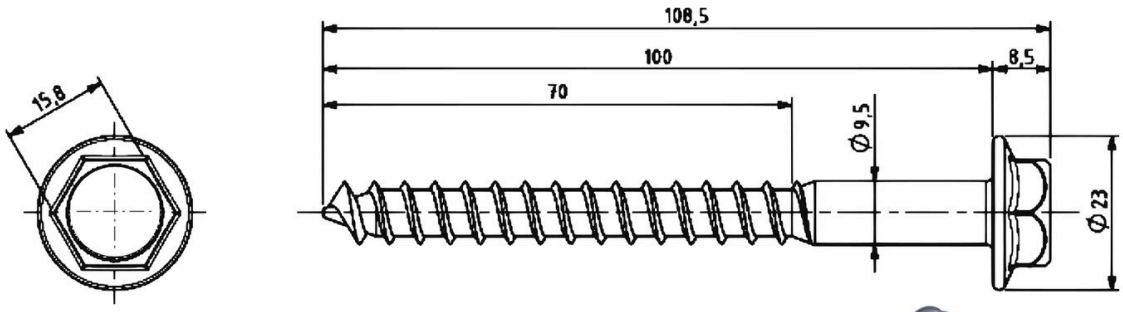



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

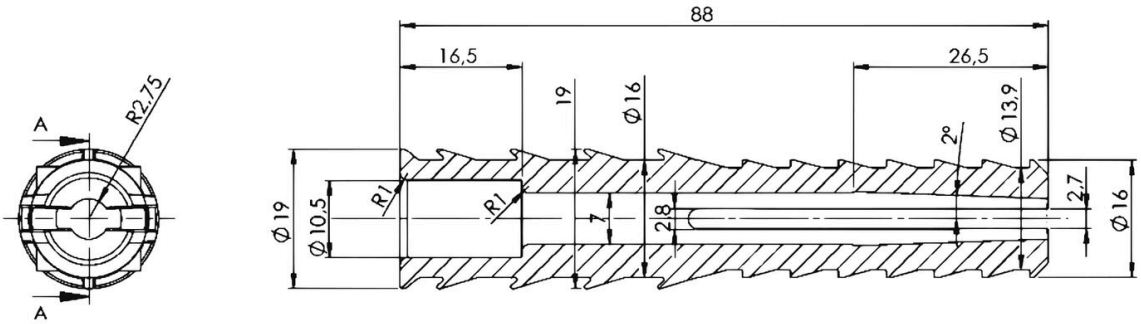

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

ATZ R6012 fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel