4-WAY STOP Additional Panel, 45×20 cm, Class I

Class I (EGP) Road Signs



AT A GLANCE

- "4-WAY STOP" additional panel, for intersections where every approach stops.
- 45 × 20 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 1 clamp for Ø48 mm posts and 2 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**ATT 4WAY**
Category	**Non-STAS**
Weight	**0.5 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/panou-4-way-stop-45x20-cm-clasa-i

Technical specifications

Type	Additional panel for premises and private roads
Shape and colours	Red rectangle with a white border and the white letters 4-WAY
Size	45 × 20 cm
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant
Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)
Sheeting service life	7 years
Weight	0.5 kg

Fixings included	1 clamp, 2 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-2:2011
Marking	CE

Description

The red panel with the white letters 4-WAY goes under the Stop sign and shows that vehicles from every approach must stop before crossing the intersection.

When class I is used

Class I (RA1) sheeting returns 70 cd/(lx·m²) for white to the driver and has a 7-year service life, enough on roads where headlights are the only light: local, minor and private roads or quiet streets. In areas with street lighting, shop windows, advertising and dense urban traffic, however, SR 1848-2 requires prismatic class 2 or 3 sheeting.

Where it goes

It goes on the same post as the Stop sign, directly below it, on every arm of the intersection. It is used in car parks, residential estates and private roads with low traffic, where the owner or operator sets the traffic rules.

Technical data

- 45 × 20 cm panel: red rectangle with a white border and the white letters 4-WAY;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- weight: 0.5 kg;
- fixings included: 1 clamp for Ø48 mm posts and 2 bolts with nuts;
- CE marked; sheet, sheeting and construction to SR EN 12899-1:2007 and SR 1848-2:2011.

Mounting and size

Fixings for the post are included: 1 clamp for Ø48 mm posts and 2 bolts with nuts; clamps for Ø60 mm posts are available on request.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. For temporary use, with no foundation: the Ø48 mm tripod post, 120 cm. On concrete or paving, where you cannot dig: the Ø60 mm flange post, 300 cm, bolted down; for it, ask for the Ø60 mm clamps when you order.

The panel measures 45 × 20 cm, the size of an ordinary additional panel, so it fits under a Stop sign on the same post.

Drawings and details · 1/3

ATT 4WAY – 4-WAY STOP

4-WAY STOP

45 x 20 cm · dimensiunile feței indicatorului
45 x 20 cm · sign face dimensions



Dimensiuni (mm) Dimensions (mm)
45 x 20 cm 450 x 200 · r = 30 panou adițional additional panel

Indicator în afara SR 1848-1:2024, după desenul nostru; cotele sunt ale produsului.
Sign outside SR 1848-1:2024, our own design; dimensions of the product.


Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).

Scriere SR 1848-3: tip „îngust”, H = 115 mm.
SR 1848-3 lettering: narrow type, H = 115 mm.

Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).
Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).

ATT 4WAY dimensions

Drawings and details · 2/3

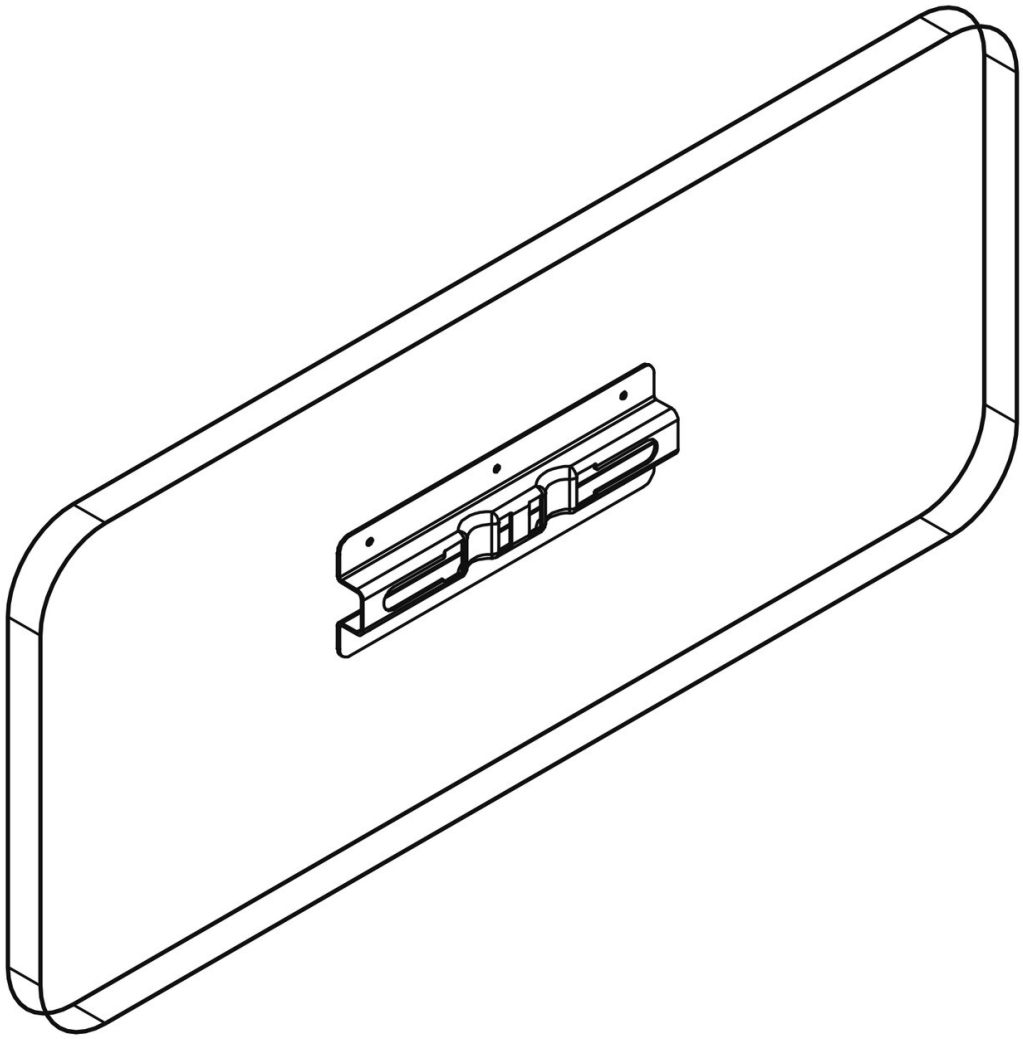


Back of the ATT 4WAY panel

Drawings and details · 3/3

Prindere cu canal și colier, stâlp Ø48 mm

Channel and clamp fixing, Ø48 mm post

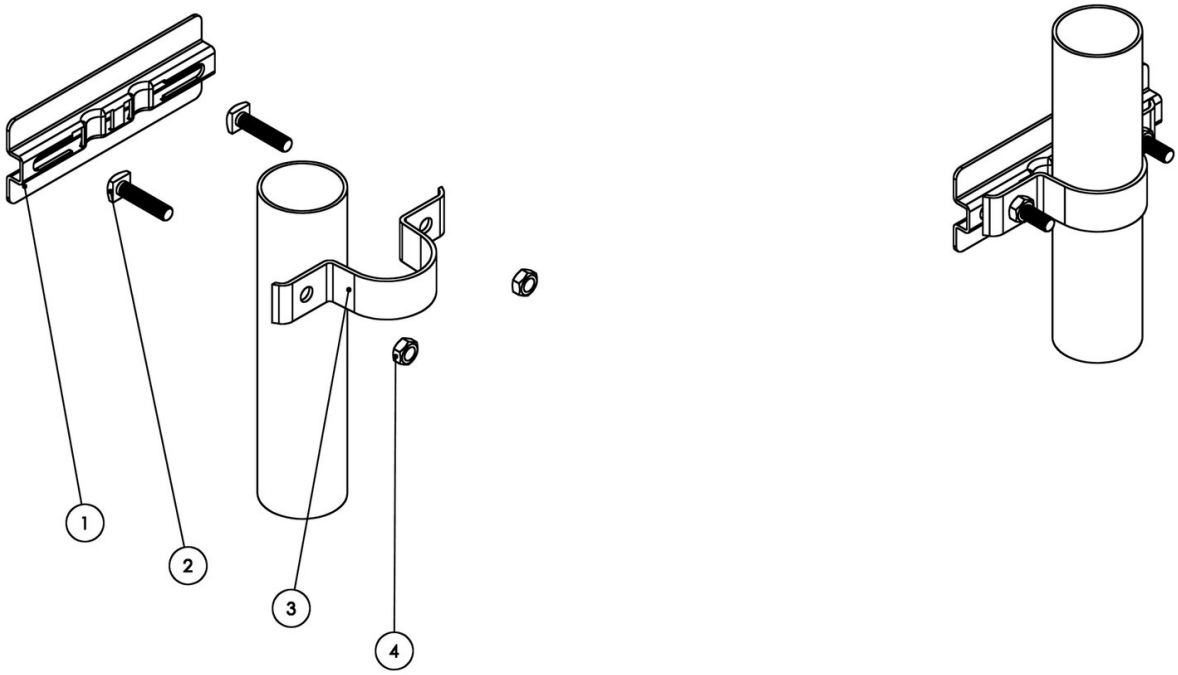

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.

ATT 4WAY fixing system