FINE – Video Monitoring Additional Panel, 45×20 cm, Class I

Class I (EGP) Road Signs



AT A GLANCE

- "FINE – Video Monitoring" additional panel, mounted under a prohibition sign.
- 45 × 20 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 1 clamp for Ø48 mm posts and 2 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**ATT AMENDA**
Category	**Non-STAS**
Weight	**0.5 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/panou-amenda-monitorizare-video-45×20-cm-clasa-i

Technical specifications

Type	Additional panel for premises and private roads
Shape and colours	White rectangle with a black border and the black words AMENDĂ – Monitorizare Video
Size	45 × 20 cm
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant
Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)
Sheeting service life	7 years

Weight	0.5 kg
Fixings included	1 clamp, 2 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-2:2011
Marking	CE

Description

The white panel with a black border and the words AMENDĂ – Monitorizare Video (fine, video monitoring) goes under a prohibition sign. It announces that the area is under video surveillance and that ignoring the sign is fined.

When class I is used

Class I (RA1) sheeting returns 70 cd/(lx·m²) for white to the driver and has a 7-year service life, enough on roads where headlights are the only light: local, minor and private roads or quiet streets. In areas with street lighting, shop windows, advertising and dense urban traffic, however, SR 1848-2 requires prismatic class 2 or 3 sheeting.

Where it goes

It goes on the same post as the prohibition sign it refers to, directly below it, usually at the entrance to car parks, yards and premises. The access rules and the video surveillance are set by the owner or operator of the site.

Technical data

- 45 × 20 cm panel: white rectangle with a black border and the black words AMENDĂ – Monitorizare Video;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- weight: 0.5 kg;
- fixings included: 1 clamp for Ø48 mm posts and 2 bolts with nuts;
- CE marked; sheet, sheeting and construction to SR EN 12899-1:2007 and SR 1848-2:2011.

Mounting and size

Fixings for the post are included: 1 clamp for Ø48 mm posts and 2 bolts with nuts; clamps for Ø60 mm posts are available on request.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. For temporary use, with no foundation: the Ø48 mm tripod post, 120 cm. On concrete or paving, where you cannot dig: the Ø60 mm flange post, 300 cm, bolted down; for it, ask for the Ø60 mm clamps when you order.

The panel measures 45 × 20 cm, the size of an ordinary additional panel, so it fits under a prohibition sign on the same post.

Drawings and details · 1/3

ATT AMENDA – AMENDĂ – Monitorizare Video

FINE – Video Monitoring

45 x 20 cm · dimensiunile feței indicatorului
45 x 20 cm · sign face dimensions



Dimensiuni (mm) Dimensions (mm)
45 x 20 cm 450 x 200 · r = 30 panou adițional additional panel

Indicator în afara SR 1848-1:2024, după desenul nostru; cotele sunt ale produsului.
Sign outside SR 1848-1:2024, our own design; dimensions of the product.


Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).

Scriere SR 1848-3: tip „îngust”, H = 66 mm; tip „îngust”, H = 42 mm.
SR 1848-3 lettering: narrow type, H = 66 mm; narrow type, H = 42 mm.

Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).
Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).

ATT AMENDA dimensions

Drawings and details · 2/3

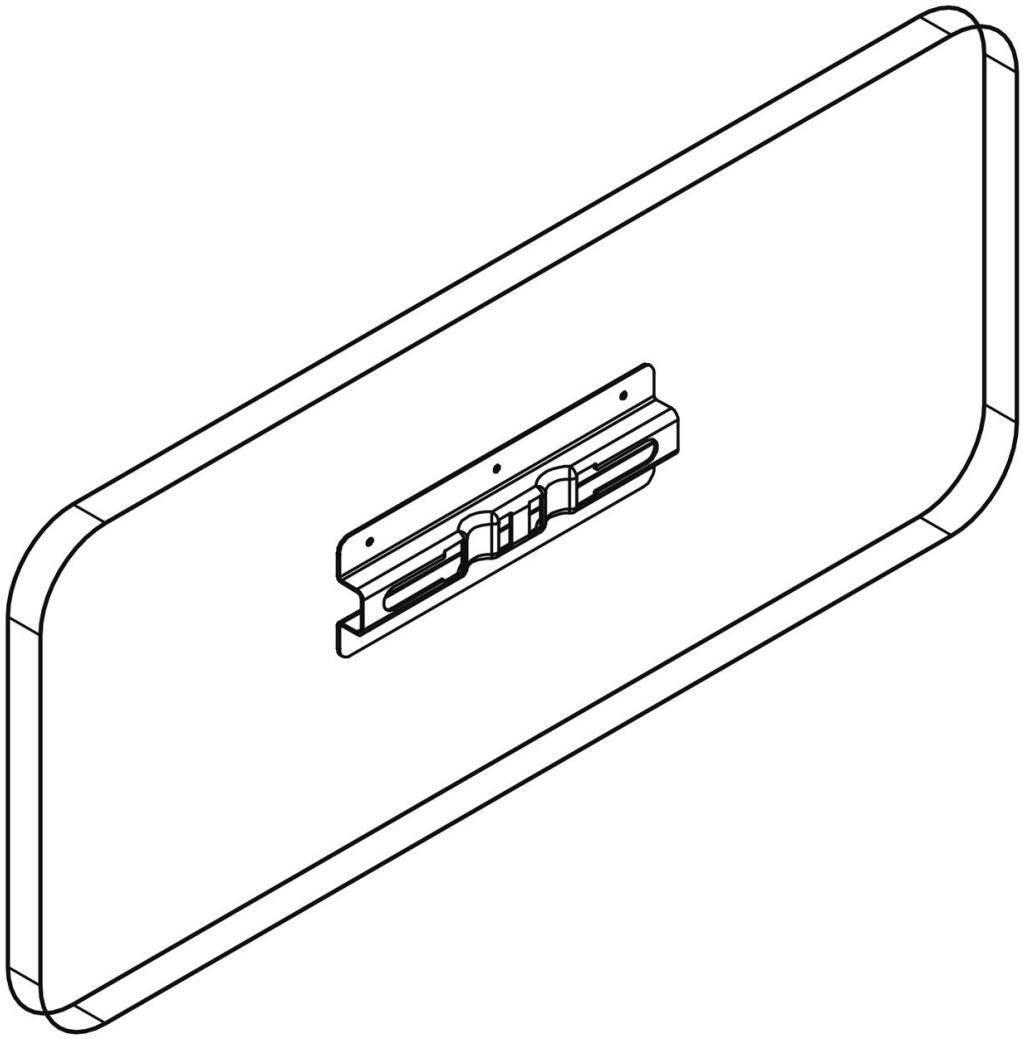


Back of the ATT AMENDA panel

Drawings and details · 3/3

Prindere cu canal și colier, stâlp Ø48 mm

Channel and clamp fixing, Ø48 mm post

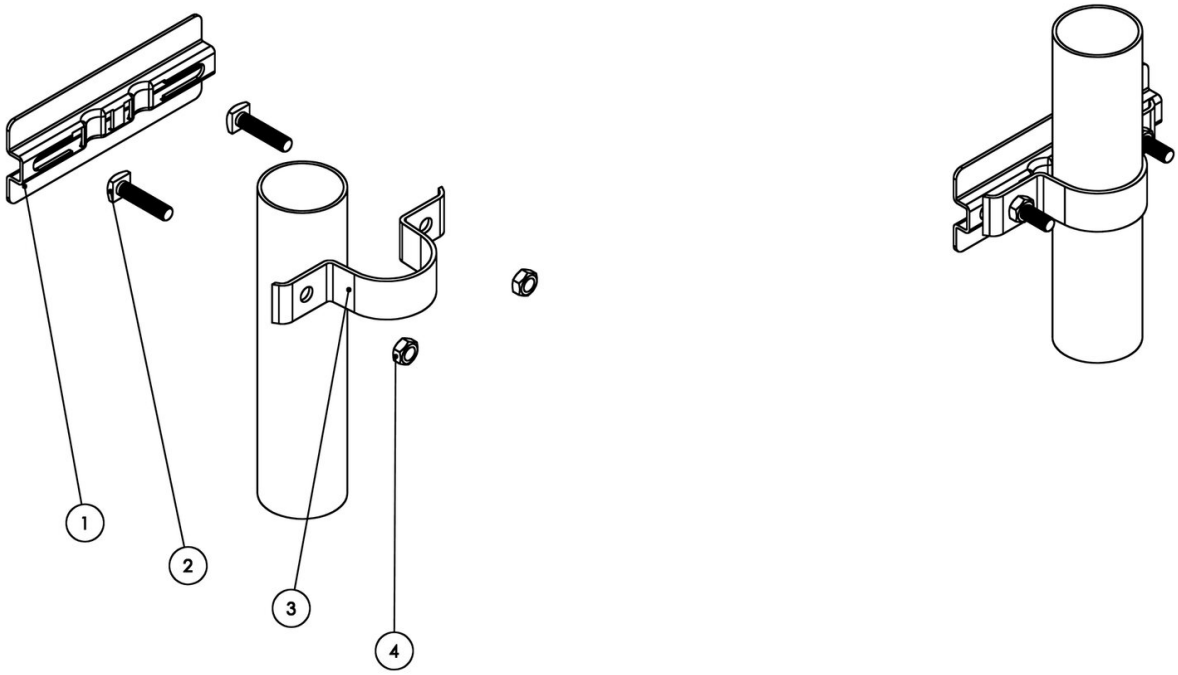

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.

ATT AMENDA fixing system