P34 Additional Panel – Except Local Access Panel, 60×20 cm, Class I

Class I (EGP) Road Signs | Signs compliant with SR 1848-1:2024



AT A GLANCE

- Additional panel P34 “Except Local Access Panel”, to SR 1848-1:2024.
- White rectangle, 60 × 20 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 1 clamp for Ø48 mm posts and 2 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**P34**
Category	**Metal Road Signs**
Weight	**1 kg**
Compliance	**Class I (EGP) Road Signs**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/panou-p34-cu-exceptia-riveranilor-60×20-cm-clasa-i

Technical specifications

SR 1848-1 code	P34
Name in the standard	Except for local access
Type	Additional panel
Shape and colours	White rectangle with a black border and the words CU EXCEPȚIA RIVERANILOR on two lines
Size	60 × 20 cm
Border	5 mm
Material	Galvanised steel sheet, 1 mm

Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant
Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)
Sheeting service life	7 years
Weight	1 kg
Fixings included	1 clamp, 2 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011, SR 1848-3:2011
Marking	CE

Description

The P34 lets through those who live or own property along the road, even though the sign above bans access: the words CU EXCEPȚIA RIVERANILOR (except residents).

When class I is used

The sign has class I (RA1) retroreflective sheeting: 70 cd/(lx·m²) for white and a 7-year service life. It is the economical choice for places without many light sources, such as local, minor and private roads or streets without strong lighting. Where there is street lighting, shop windows or advertising, SR 1848-2 requires prismatic class 2 or 3 sheeting, which stands out better against a lit background.

Where it goes, under SR 1848-1:2024

It goes before the place where the message on the panel applies. The wording can be written for any type of vehicle the exemption applies to.

SR 1848-1:2024 requires additional panels to go under the sign they complete; where technically possible, the P9, P10 or P11 symbols can be included in the main sign itself.

Technical data

- white rectangle with a black border and the words CU EXCEPȚIA RIVERANILOR on two lines, 60 × 20 cm;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- weight: 1 kg;
- fixings included: 1 clamp for Ø48 mm posts and 2 bolts with nuts;
- CE marked; compliant with SR EN 12899-1:2007, SR 1848-1:2024, SR 1848-2:2011 and SR 1848-3:2011.

Mounting and size

Fixings for the post are included: 1 clamp for Ø48 mm posts and 2 bolts with nuts; clamps for Ø60 mm posts are available on request. It goes on the same post, right under the sign it completes; the bottom edge of the assembly goes 1.50–2.50 m above the road or kerb.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. For temporary use, with no foundation: the Ø48 mm tripod post, 120 cm. On concrete or paving, where you cannot dig: the Ø60 mm flange post, 300 cm, bolted down; for it, ask for the Ø60 mm clamps when you order.

The panel measures 60 × 20 cm, border 5 mm, with the words on two lines in 6 cm narrow letters. The rectangular shape is the one drawn in SR 1848-1:2024, and the dimensions are those SR 1848-2 sets for rectangular additional panels.

Drawings and details · 1/3

P34 – Cu excepția riveranilor

Except for local access

60 x 20 cm · dimensiunile feței indicatorului

60 x 20 cm · sign face dimensions


Dimensiuni (mm)
Dimensions (mm)

60 x 20 cm
600 x 200 · r = 30
sub indicatorul pe care îl completează
under the sign it completes



Cotele sunt ale feței retroreflectorizante.
Dimensions of the retroreflective face.
Fond alb, chenar și simboluri negre (SR 1848-1:2024).
White background, black border and symbols (SR 1848-1:2024).
Chenar 5 mm.
Border 5 mm.
SR 1848-2 nu dă înălțimea scrierii pentru acest panou; s-a ales H = 60 mm, cu distanța dintre rânduri din SR 1848-3, fig. 4.
SR 1848-2 gives no letter height for this panel; H = 60 mm was chosen, with the line spacing of SR 1848-3, fig. 4.
Format 600 x 200 mm: dreptunghiul din desenul SR 1848-1:2024, cu dimensiunile panourilor adiționale dreptunghiulare din SR 1848-2, tab. 9.
600 x 200 mm format: the rectangle of the SR 1848-1:2024 drawing, sized as the rectangular additional panels of SR 1848-2, table 9.
Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).
Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).
Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).
Scriere SR 1848-3: tip „îngust", H = 60 mm.
SR 1848-3 lettering: narrow type, H = 60 mm.
Sursa: SR 1848-1:2024; SR 1848-2:2011, tab. 9; SR 1848-3:2011.
Source: SR 1848-1:2024; SR 1848-2:2011, table 9; SR 1848-3:2011.


Drawings and details · 2/3

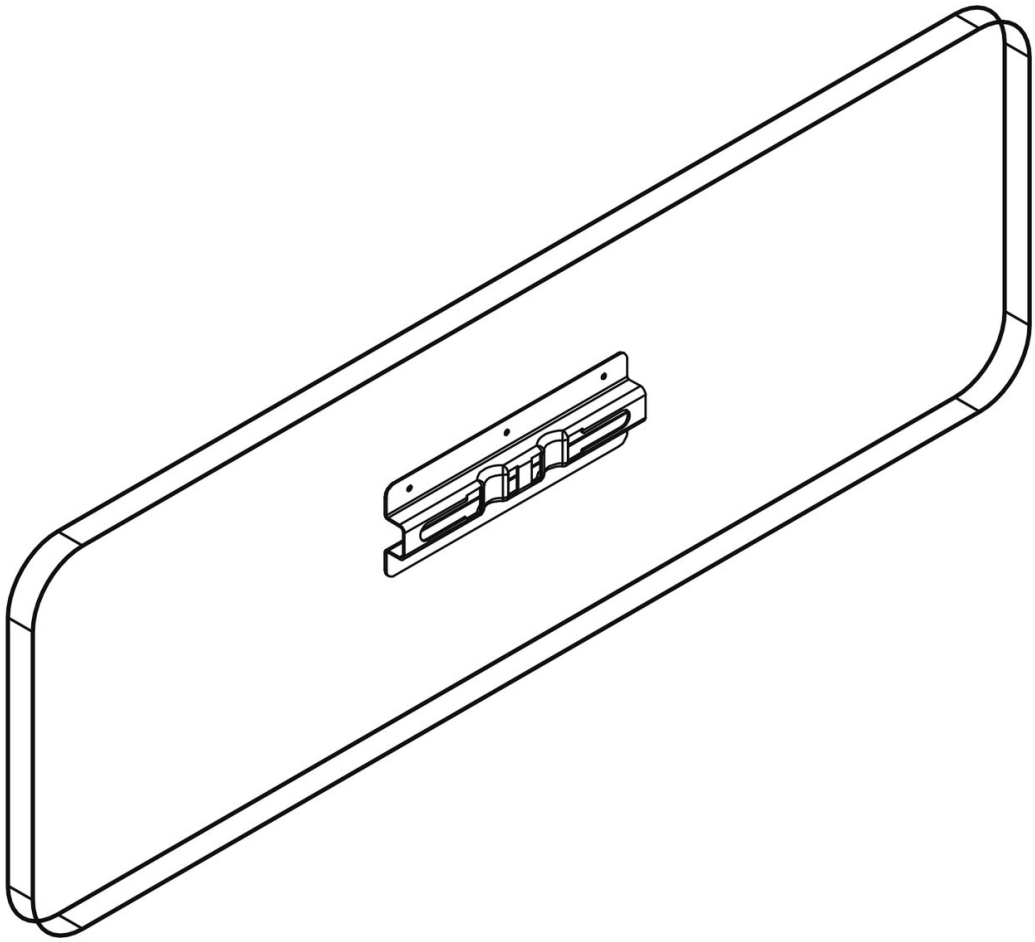

Drawings and details · 3/3

Prindere cu canal și colier, stâlp Ø48 mm

Channel and clamp fixing, Ø48 mm post

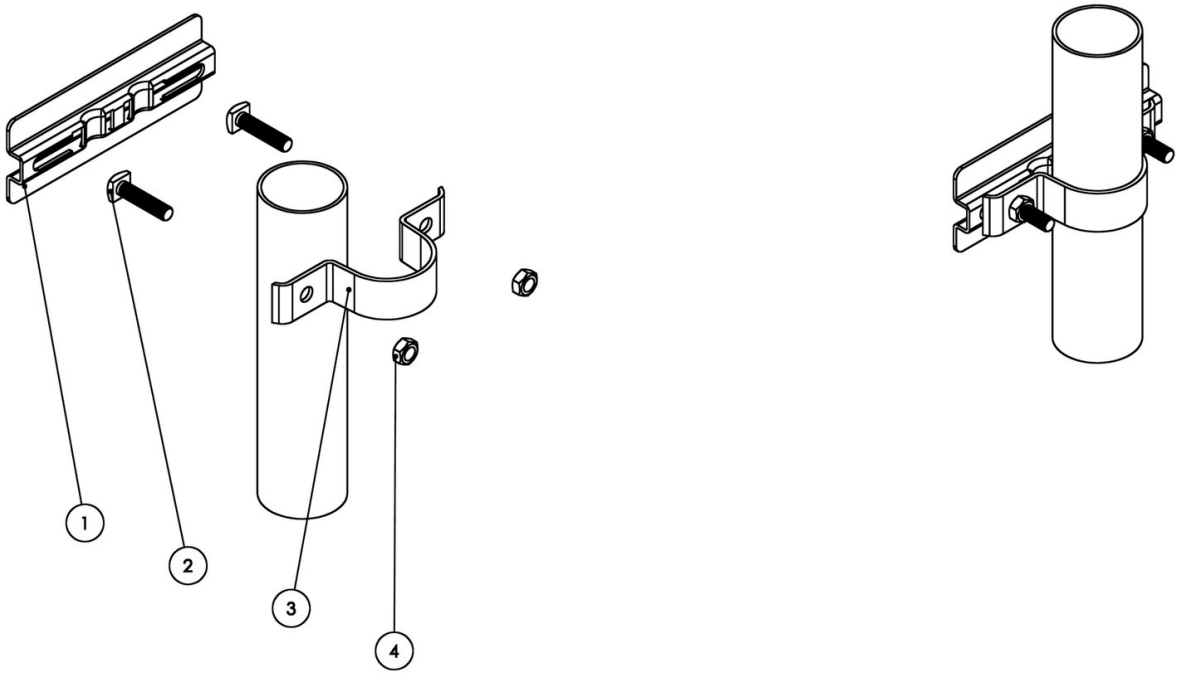

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.