
P36 Additional Panel – Parking Arrangement: Fully on Pavement, Side View, 45×20 cm, Class I

Class I (EGP) Road Signs

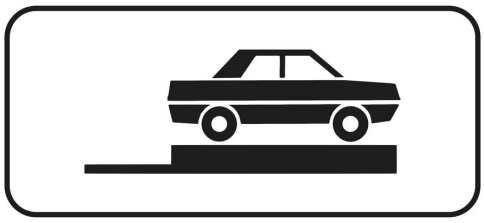

AT A GLANCE

- Additional panel P36 “Parking Arrangement: Fully on Pavement, Side View”.
- White panel, 45 × 20 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 1 clamp for Ø48 mm posts and 2 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**P36d**
Category	**Non-STAS**
Weight	**0.5 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/panou-p36-modul-de-parcare-complet-pe-trotuar-vedere-laterala-45×20-cm-clasa-i

Technical specifications

Type	Additional panel (version outside SR 1848-1:2024)
Shape and colours	White panel with a black border and a car seen from the side, fully on the pavement
Size	45 × 20 cm
Border	5 mm
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant
Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)

Sheeting service life	7 years
Weight	0.5 kg
Fixings included	1 clamp, 2 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-2:2011
Marking	CE

Description

The panel under the G31 shows how vehicles must park: a car seen from the side, fully on the pavement.

When class I is used

The sign has class I (RA1) retroreflective sheeting: 70 cd/(lx·m²) for white and a 7-year service life. It is the economical choice for places without many light sources, such as local, minor and private roads or streets without strong lighting. Where there is street lighting, shop windows or advertising, SR 1848-2 requires prismatic class 2 or 3 sheeting, which stands out better against a lit background.

Where it goes, under SR 1848-1:2024

It goes under the G31 (parking), to show how vehicles are positioned relative to the pavement.

It is a version of the P36 panel in SR 1848-1:2024, with a different car position, matching the parking layout on site.

Technical data

- white panel with a black border and a car seen from the side, fully on the pavement, 45 × 20 cm;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- weight: 0.5 kg;
- fixings included: 1 clamp for Ø48 mm posts and 2 bolts with nuts;
- CE marked; sheet, sheeting and construction to SR EN 12899-1:2007 and SR 1848-2:2011.

Mounting and size

Fixings for the post are included: 1 clamp for Ø48 mm posts and 2 bolts with nuts; clamps for Ø60 mm posts are available on request. It goes on the same post, right under the sign it completes; the bottom edge of the assembly goes 1.50–2.50 m above the road or kerb.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. For temporary use, with no foundation: the Ø48 mm tripod post, 120 cm. On concrete or paving, where you cannot dig: the Ø60 mm flange post, 300 cm, bolted down; for it, ask for the Ø60 mm clamps when you order.

The panel measures 45 × 20 cm, border 5 mm. These are the dimensions SR 1848-2 sets for this sign.


Drawings and details · 1/3

P36 – Modalități în care se execută parcarea

Parking arrangement

45 x 20 cm · dimensiunile feței indicatorului

45 x 20 cm · sign face dimensions

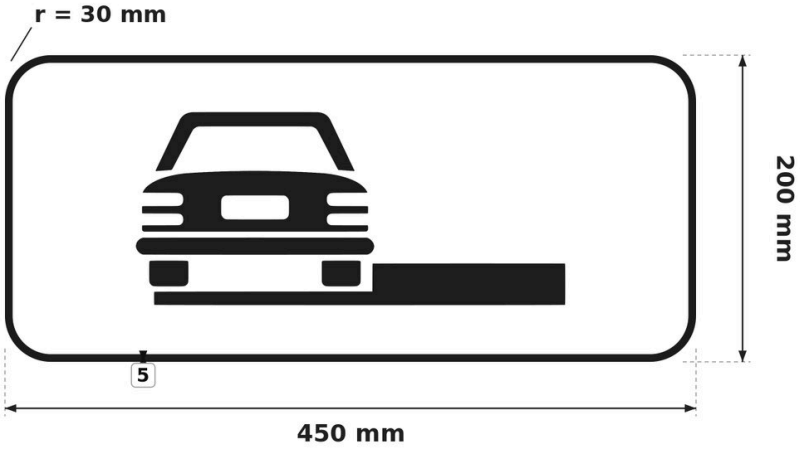

Dimensiuni SR 1848-2 (mm)
SR 1848-2 dimensions (mm)

45 x 20 cm
450 x 200 · r = 30
sub indicatorul pe care îl completează under the sign it completes

Cotele sunt ale feței retroreflectorizante.
Dimensions of the retroreflective face.

Fond alb, chenar și simboluri negre (SR 1848-1:2024).
White background, black border and symbols (SR 1848-1:2024).


Chenar 5 mm.
Border 5 mm.

Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).

Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).
Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).

Sursa: SR 1848-2:2011, tab. 9.
Source: SR 1848-2:2011, table 9.


Drawings and details · 2/3

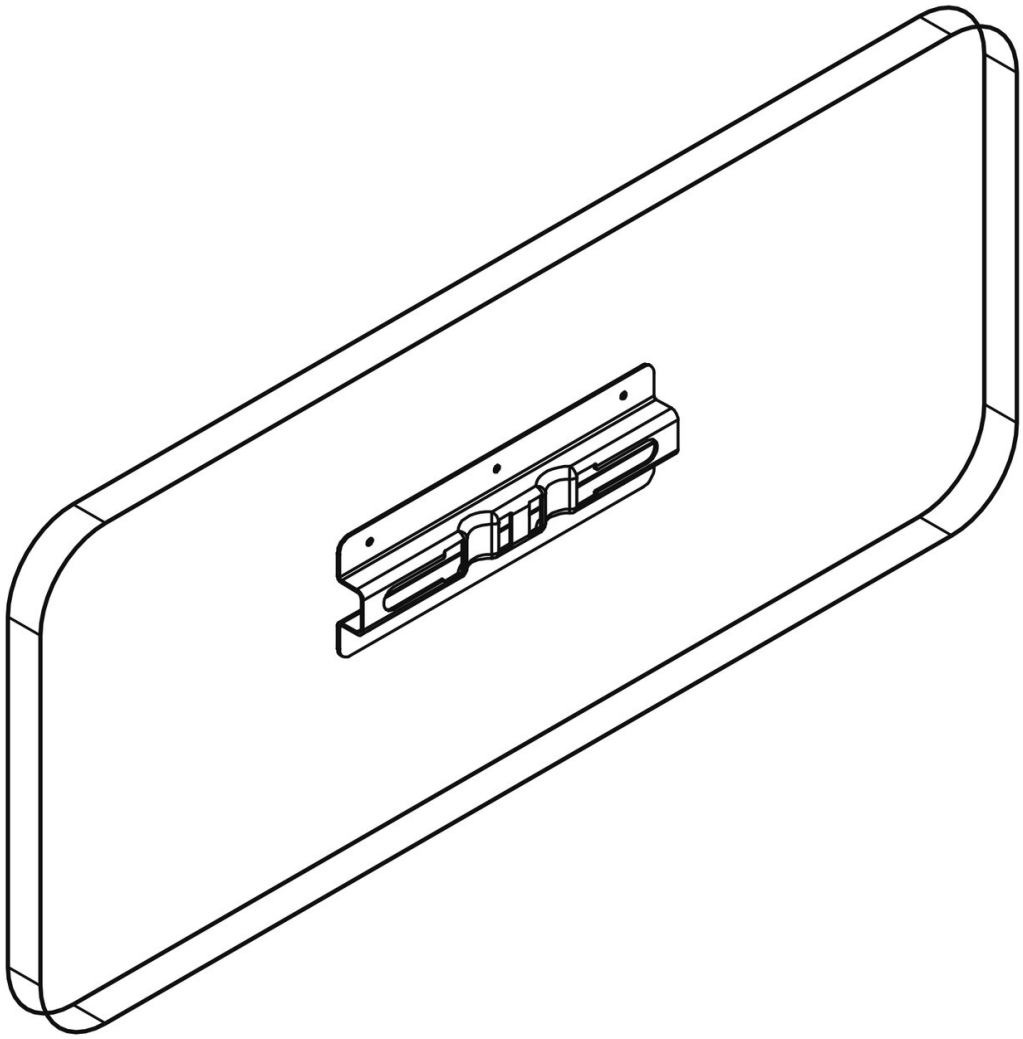

Drawings and details · 3/3

Prindere cu canal și colier, stâlp Ø48 mm

Channel and clamp fixing, Ø48 mm post

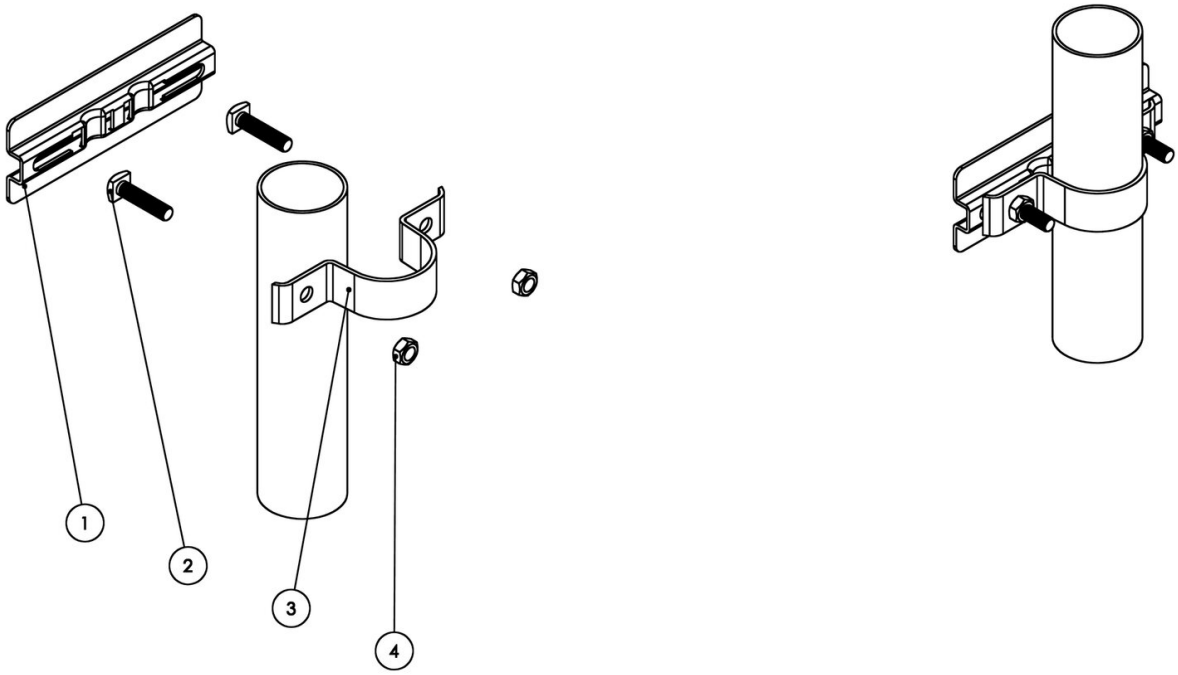

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.