
Cable Protector Ramp, 5 Channels of 3×3 cm, 90×50×5.5 cm

Signs compliant with SR 1848-1:2024

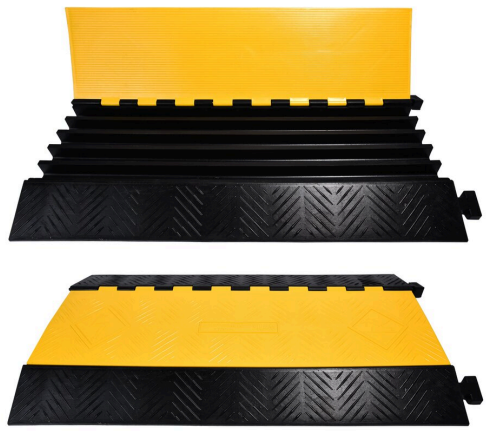

AT A GLANCE

- Cable protector with 5 channels of 3 × 3 cm.
- Black vulcanised rubber with a yellow PPC lid.
- 90 × 50 × 5.5 cm, 17.5 kg; for 10 km/h.
- Locks to the next piece.

Product code	**ATO 5855**
Category	**Speed Bumps**
Weight	**17.5 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/rampa-de-protectie-pentru-cabluri-5-canale-de-3x3-cm-90x50x5-5-cm

Technical specifications

Material	Rubber, PPC
Limitation	10 km/h
Color	Yellow + Black
Installation	Lockable to the Next Piece

Description

At a concert, a fair or a large building site, a single cable rarely crosses alone. Usually there are power, data, sound and a hose, all on the same route. This protector takes them all: it has 5 channels of 3 × 3 cm side by side.

Construction

The body is black vulcanised rubber and the lid over the channels is yellow PPC. It is 90 cm long, 50 cm wide and 5.5 cm high and weighs 17.5 kg.

Crossing it

The side ramps let wheels climb on and off gradually. The product sheet recommends crossing at 10 km/h.

Joining

Each piece locks into the next, so the run can be as long as you need, with no gaps between sections.

Where it is used

- at festivals, concerts and exhibitions;

- on building sites, across internal roads;
- in industrial halls and warehouses;
- on outdoor film shoots and broadcasts.

For one or two cables the smaller ATZ R102, with 2 channels, is enough.

Drawings and details · 1/3


Dimensiuni: 90 x 50 x 5,5 cm

Dimensions: 90 x 50 x 5.5 cm

ATO 5855



secțiune / cross-section

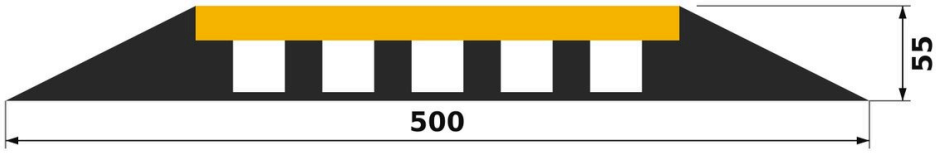

Dimensiuni în mm. 5 canale de 30 x 30 mm. Corp din cauciuc, capac din PPC; 17,5 kg.
Dimensions in mm. 5 channels, 30 x 30 mm. Rubber body, PPC lid; 17.5 kg.
Poziția canalelor în secțiune este orientativă.
The position of the channels in the cross-section is indicative.

ATO 5855 dimensions

Drawings and details · 2/3

Cu capacul ridicat: cablurile se așază în canale **ATO 5855**

With the lid up: the cables lie in the channels



Fiecare piesă se blochează în cea următoare, fără șuruburi. Trecere recomandată: 10 km/h.
Each piece locks into the next, without screws. Recommended crossing speed: 10 km/h.

ATO 5855 with the lid up

Drawings and details · 3/3


Detalii: capac, canale, îmbinare, rampă

ATO 5855

Details: lid, channels, joint, ramp



capac rabatabil, din PPC galben
hinged lid, yellow PPC

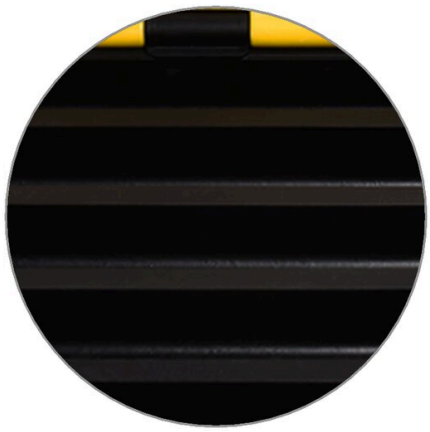

5 canale de 3 x 3 cm
5 channels, 3 x 3 cm



cheie de îmbinare cu piesa următoare
key joining the next piece



rampă din cauciuc, cu model antiderapant
rubber ramp with anti-slip pattern

Corp din cauciuc, capac din PPC.
Rubber body, PPC lid.

ATO 5855 details