Galvanised Road Sign Post, Ø48 mm, 300 cm



AT A GLANCE

- Galvanised tube post, Ø48.3 mm.
- 300 cm long, 2.6 mm wall, 8.5 kg.
- Plastic cap at the top.
- For road signs and traffic mirrors.

Product code	**ATT 48×2_3**
Category	**Road Sign Posts**
Weight	**8.5 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/stalp-zincat-pentru-indicatoare-rutiere-o48-mm-300-cm

Technical specifications

Material	Zinc-coated pipe
Wall Thickness	2.6 mm
Diameter	48.3 mm
Height	300 cm

Description

The ATT 48×2_3 is the standard post for roadside signs: a Ø48.3 mm galvanised tube with a 2.6 mm wall, 300 cm long, with a plastic cap at the top that stops water getting into the tube and the post rusting from the inside.

Technical data

- diameter: Ø48.3 mm, 2.6 mm wall;
- length: 300 cm;
- material: galvanised tube;
- plastic cap at the top;
- weight: 8.5 kg.

Installation

The post is set into the ground in a concrete foundation, and the sign is fixed with ATT 48c galvanised anti-rotation clamps: 2 clamps for a normal-size sign. If the cap goes missing, replace it with the ATT 48d.

What goes on it

Warning, priority, prohibition, mandatory or information signs, and also traffic mirrors: the ATZ 6080 (Ø80 cm) and ATZ 6460 (Ø60 cm) come with a fixing for posts between Ø48 and Ø85 mm.

Where it is used

On public roads, streets, driveways, in car parks, at the entrance to industrial yards and in housing estates.

Other versions


For a large sign or two signs on one post, there is a Ø60 mm, 350 cm post. Where a foundation cannot be poured, a Ø48 mm flanged post bolts onto concrete instead.

Drawings and details · 1/3

Dimensiuni
Dimensions

ATT 48x2_3



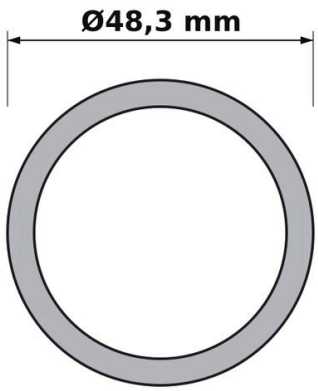

Secțiune, mărită
Section, enlarged


Perete 2,6 mm. 8,5 kg.
Wall 2.6 mm. 8.5 kg.
Țeavă zincată, cu dop din plastic la partea de sus.
Galvanised tube, with a plastic cap at the top.

ATT 48×2_3 dimensions

Drawings and details · 2/3

Prindere cu canal și colier, stâlp Ø48 mm

Channel and clamp fixing, Ø48 mm post

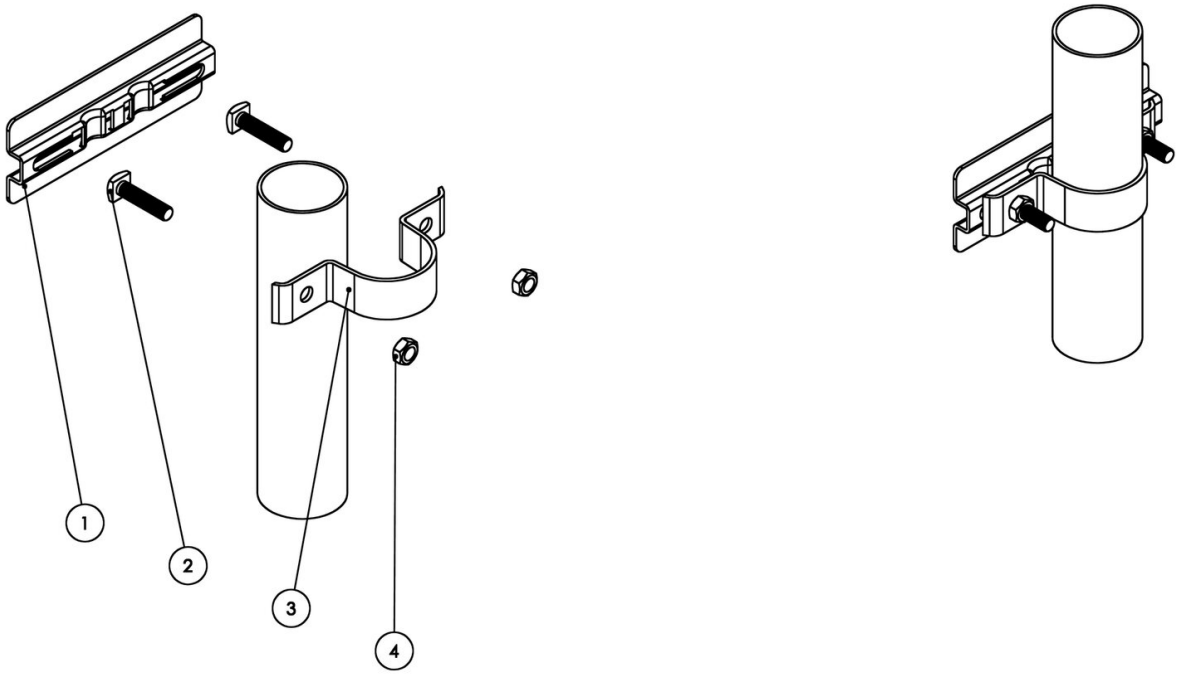

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)


Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.

ATT 48×2_3 fixing system

Drawings and details · 3/3

Cum se folosește
How it is used

ATT 48x2_3

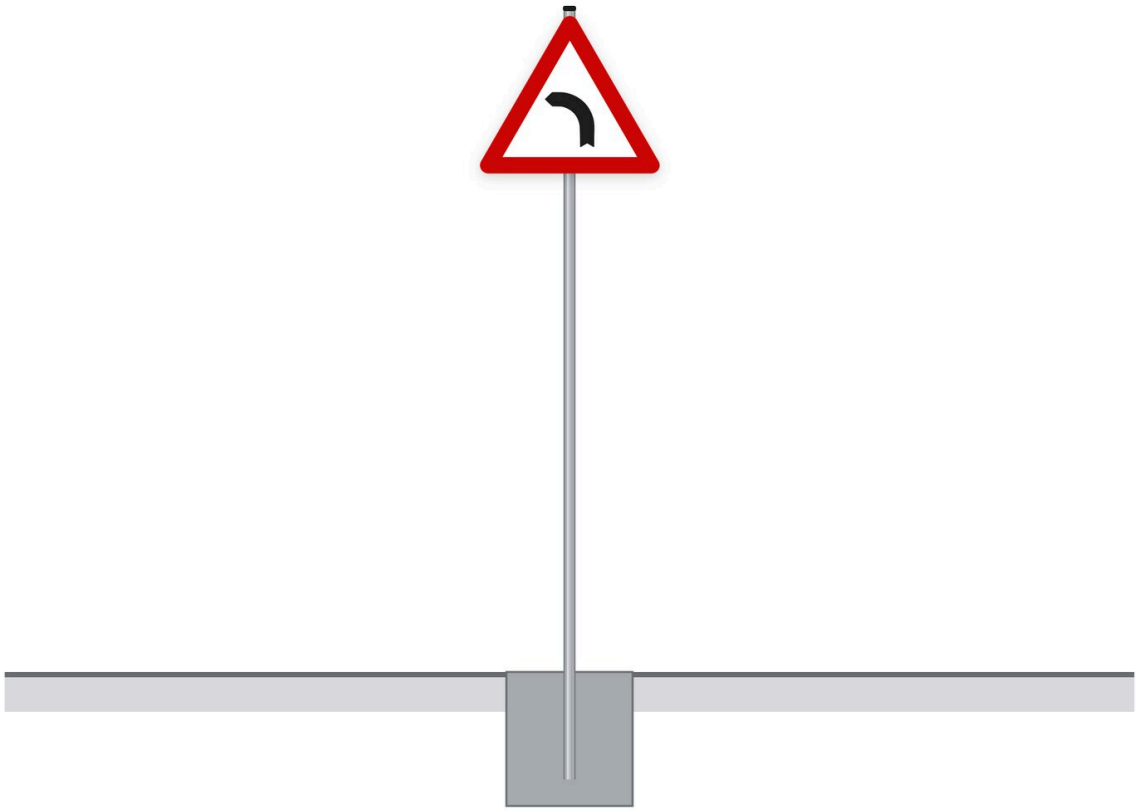

Stâlpul se fixează în sol, într-o fundație din beton. Indicatorul se prinde cu 2 cleme.
The post is set in the ground, in a concrete foundation. The sign fixes with 2 clamps.
Exemplu cu un indicator de 70 cm; alegi fundația după sol.
Example with a 70 cm sign; choose the foundation for your ground.

ATT 48×2_3 in use