Modular Work Zone Barrier, 150×100 cm, Yellow

Class I (EGP) Road Signs



AT A GLANCE

- Yellow modular fence, 150 × 100 cm, 12 kg.
- Red and white chequered reflective bands, 4 films.
- Side clip for joining; stacks flat.
- 2 threaded sockets for lamps or signs.

Product code	**ATZ 80150-Y**
Category	**Barriers**
Brand	**Atto Trafic**
Weight	**12 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/bariera-modulara-pentru-semnalizare-lucrari-150×100-cm-galbena

Technical specifications

Material	PVC, PPC
Color	Yellow
Reflective	4 reflective sheets
Installation	4 Dowels, 4 Screws

Description

Yellow shows up well inside a warehouse or a factory: next to inspection pits, forklift areas, machines under maintenance. This fence has a yellow frame, and the reflective bands top and bottom have a red and white chequered pattern.

Size and weight

It measures 150 × 100 cm, 5 cm thick, and weighs 12 kg. It is made of PVC and PPC and stands on two black feet with a wide base.

Joining and storage

A clip on the side attaches it to the next fence, so you can close off an area of any length from 1.5 m panels. When you no longer need them, the fences lie flat on top of one another and take little room in a corner of the warehouse.

Accessories

The 2 threaded sockets take warning lamps or small plastic signs. For fixing into a floor or asphalt, the product sheet gives 4 anchors and 4 bolts, 2 per foot.

Other colours


On roads and building sites the red version is more common. There is also a white and a blue one.

Drawings and details · 1/5

Dimensiuni
Dimensions

mm

ATZ 80150-Y

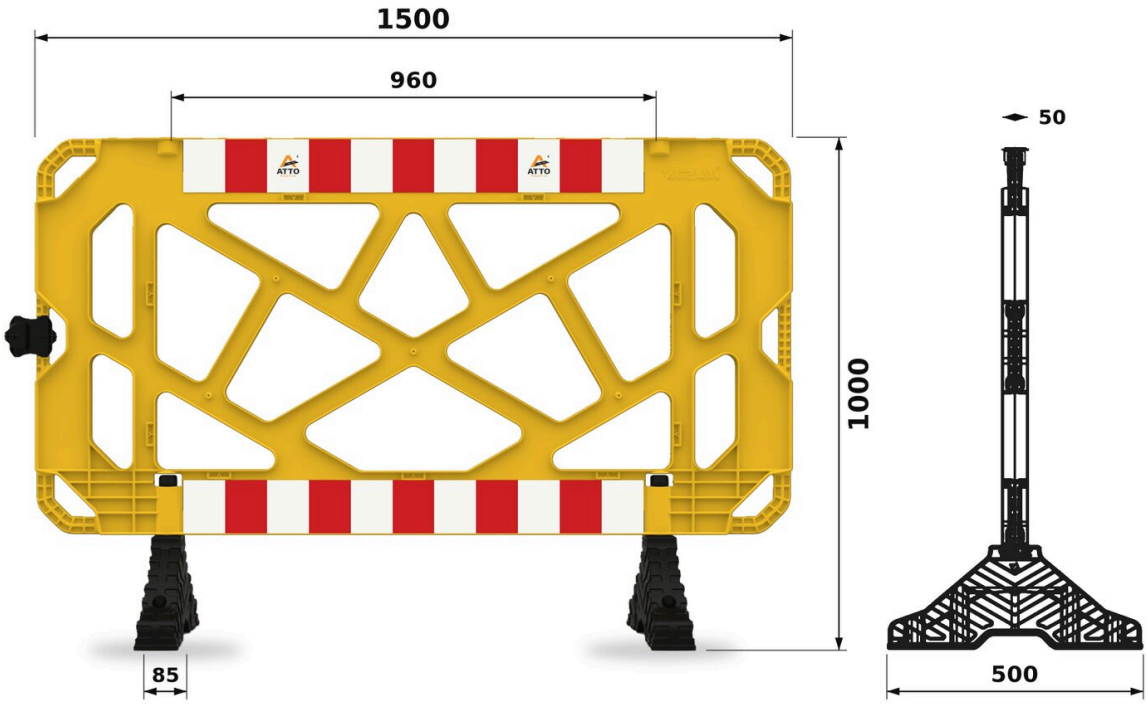

lateral
side view

Lungime 150 cm, înălțime 100 cm, grosimea ramei 5 cm; picior de 50 cm. Greutate 12 kg. Abatere admisă ± 5 %.
Length 150 cm, height 100 cm, frame 5 cm thick; 50 cm foot. Weight 12 kg. Tolerance ± 5 %.
2 socluri filetate Ø32 mm, adânci de 25,5 mm, la 96 cm distanță, pentru lămpi sau indicatoare.
2 threaded Ø32 mm sockets, 25.5 mm deep, 96 cm apart, for lamps or signs.

ATZ 80150-Y dimensions


Drawings and details · 2/5

Detalii
Details


ATZ 80150-Y



Clemă laterală: se prinde de gardul următor
Side clamp: locks onto the next barrier

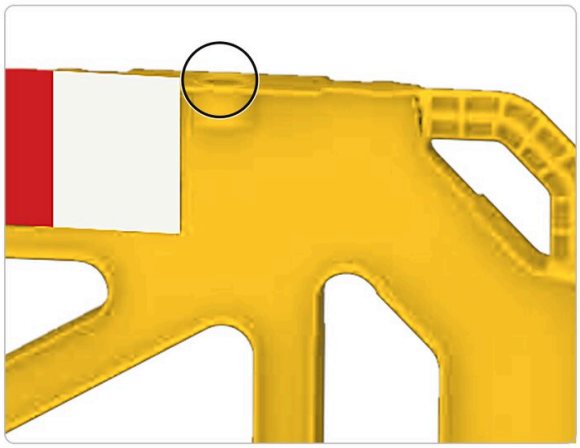

Soclu filetat Ø32 mm, pentru lampă sau indicator
Threaded Ø32 mm socket for a lamp or sign

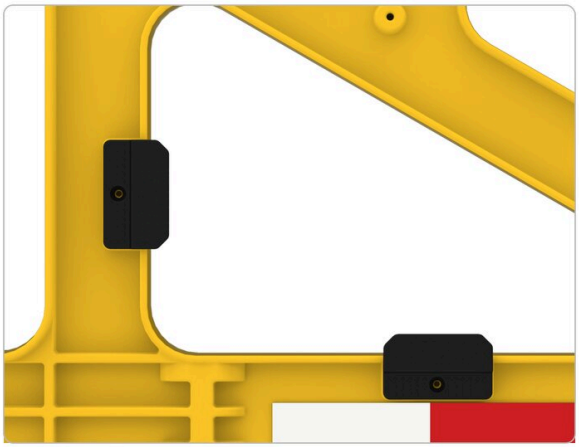

Locuri de prindere pentru panoul de 100 x 50 cm
Fixing places for the 100 x 50 cm panel



Picior rotativ de 50 cm, se fixează cu 2 șuruburi
Rotating 50 cm foot, fixed with 2 screws

ATZ 80150-Y details

Drawings and details · 3/5

Cum se folosește **ATZ 80150-Y**

How it is used



Se prind cap la cap: 3 garduri fac un șir de 4,5 m

They lock end to end: 3 barriers make a 4.5 m run



4 garduri închid o zonă pe toate laturile

4 barriers close an area on all sides



Se stivuiesc culcate, pe palet

They stack flat on a pallet

ATZ 80150-Y: how it is used

Drawings and details · 4/5

Cu indicator și lampă
With a sign and a lamp

ATZ 80150-Y



Indicatorul și lampa se montează în cele 2 socluri filetate și se comandă separat
The sign and the lamp fit the 2 threaded sockets and are ordered separately



Indicator din plastic pe soclu
Plastic sign on the socket



Lampă solară ATZ 404-Y pe soclu
ATZ 404-Y solar lamp on the socket

ATZ 80150-Y with a plastic sign and an ATZ 404-Y lamp mounted on the sockets

Drawings and details · 5/5


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




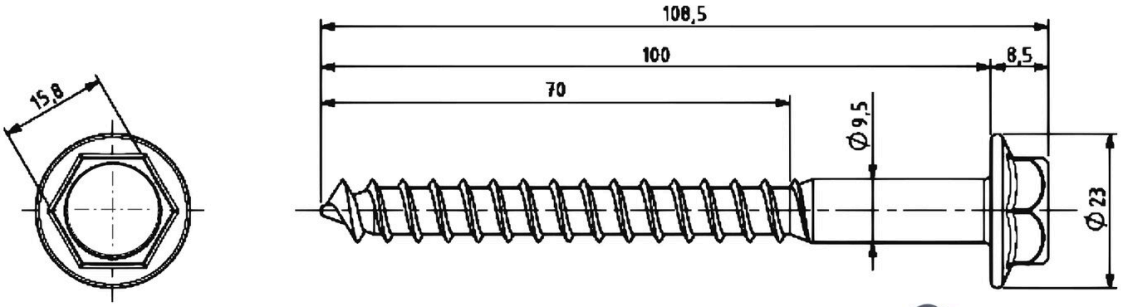



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

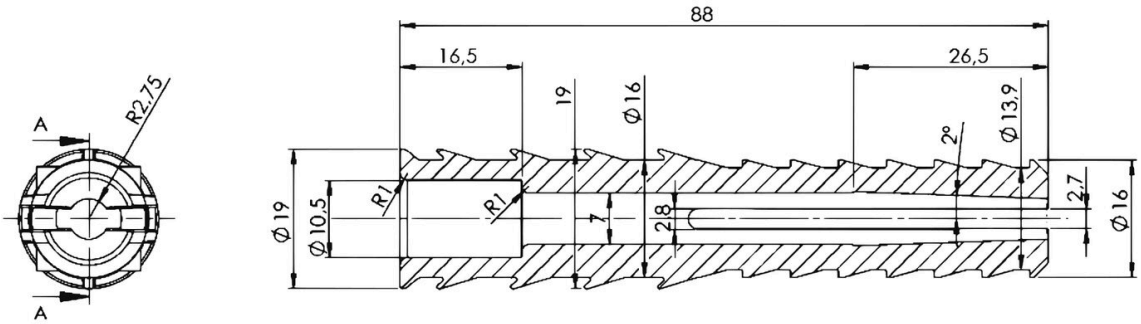

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

ATZ 80150-Y fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel