Mobile Base for Beacon or Sign, with Reflective Strips, 28 kg

Signs compliant with SR 1848-1:2024



AT A GLANCE

- PVC base, 28 kg, 76 × 38 × 12.2 cm.
- Holes: 40 × 40 and 60 × 60 mm, 3 × Ø50 mm.
- Yellow reflective strips at both ends.
- For V3-V4 beacon panels and mobile sign posts.

Product code	**V2-28**
Category	**Directional Beacons**
Weight	**28 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/baza-mobila-pentru-baliza-sau-indicator-cu-benzi-reflectorizante-28-kg

Technical specifications

Material	PVC
Holes	4 × 4 cm, 6 × 6 cm, 3 x Ø5 cm

Description

The 15 kg base is fine in town. On a main road, with lorries passing close and a crosswind, you need something that will not move. This base weighs 28 kg, almost twice as much, at almost the same size: 76 × 38 cm against 75 × 38 cm.

Holes for posts

- square 40 × 40 and 60 × 60 mm;
- three round Ø50 mm.

The V3-V4 beacon panel fits the 60 × 60 mm socket, and the other holes take mobile sign posts.

Visibility

Each end has a yellow reflective strip, so at night the whole base shows up, not only the panel above it. It stands 12.2 cm high.

Handling

It is made of PVC and sits straight on the asphalt, with no holes or bolts. At 28 kg it is easier to move with two people, especially when loading it into a van.

Complete set

The ready-assembled beacon, a 25 × 100 cm panel on this base, is the V7-28 (Class I film) or the V7-28_II (Class II film).

What the roadworks rules require (Order 1112/411/2000)

SR 1848-1:2024 describes the mobile sign support (V2) as a base for markers or signs, heavy enough to keep them upright in traffic, and SR 1848-2 allows temporary signs on mobile supports. The methodological rules approved by Order MI/MT no. 1112/411/2000 require roadworks signs to be stood on the ground first, to check that they are clearly visible, and only then fixed to a support; no more than two signs go on the same support or side by side.

The contractor installs the signing to the layout approved by the road authority with the traffic police's agreement, maintains and completes it for the whole job and removes it at the end; accidents caused by incomplete or missing temporary signing are entirely the contractor's responsibility.


Drawings and details · 1/3

V2-28 – Suport pentru indicator mobil, 28 kg

V2-28 Portable sign base, 28 kg

76 x 38 x 12,2 cm · dimensiunile produsului

76 x 38 x 12.2 cm · product dimensions

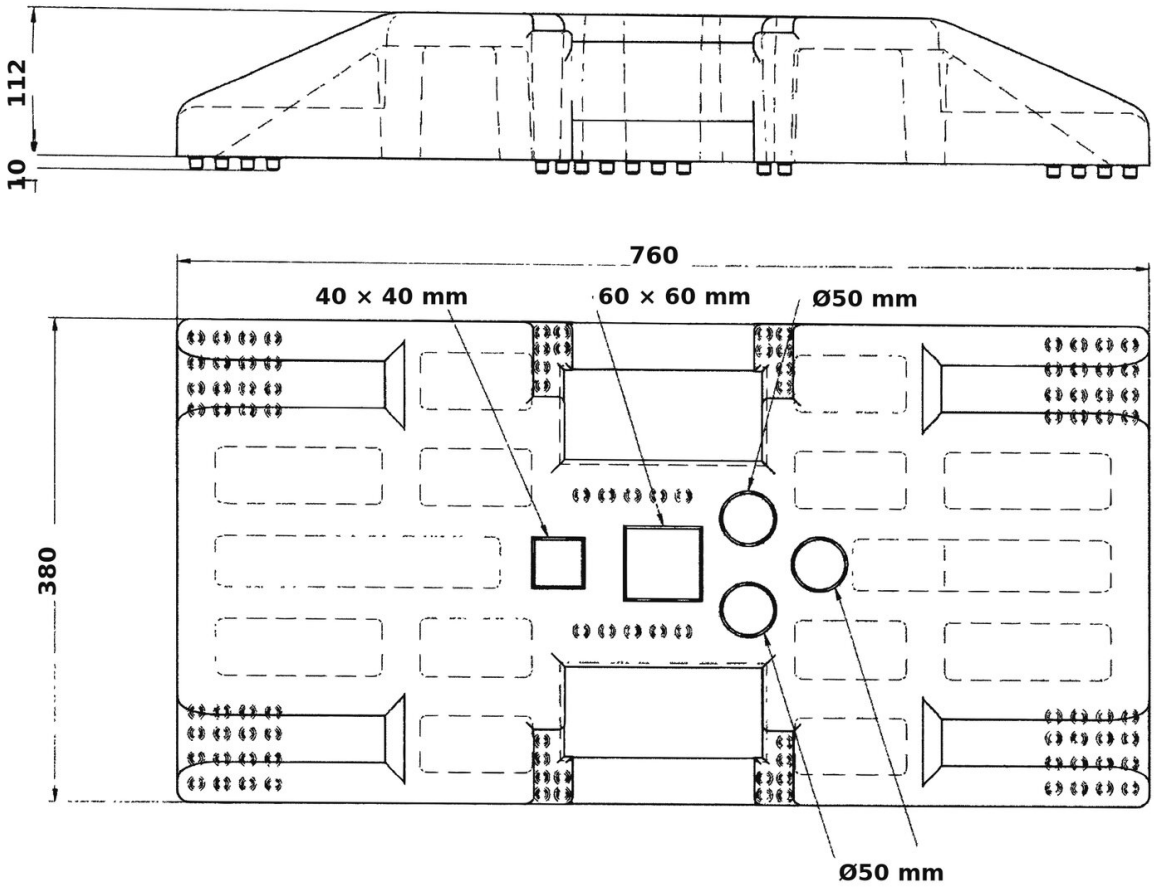

Dimensiuni în mm. Din PVC rezistent, negru; 28 kg; tălpi antiderapante; se stivuiește.
Dimensions in mm. Tough black PVC; 28 kg; anti-slip feet; stackable.

Loc pentru un acumulator standard UE (iluminarea indicatoarelor); două mânere de transport.
Room for a standard EU battery (sign lighting); two carrying handles.


La ambele capete: bandă reflectorizantă galbenă și numele ATTO TRAFIC.
At both ends: yellow reflective tape and the ATTO TRAFIC name.

SR 1848-2, tab. 12 (V2): 500–800 x 300–500 mm, 17–30 kg.
SR 1848-2, table 12 (V2): 500–800 x 300–500 mm, 17–30 kg.

V2-28 base dimensions: 76 × 38 × 12.2 cm, 40 × 40, 60 × 60 and 3 x Ø50 mm sockets

Drawings and details · 2/3

Ce intră în fiecare locaș
What fits each socket

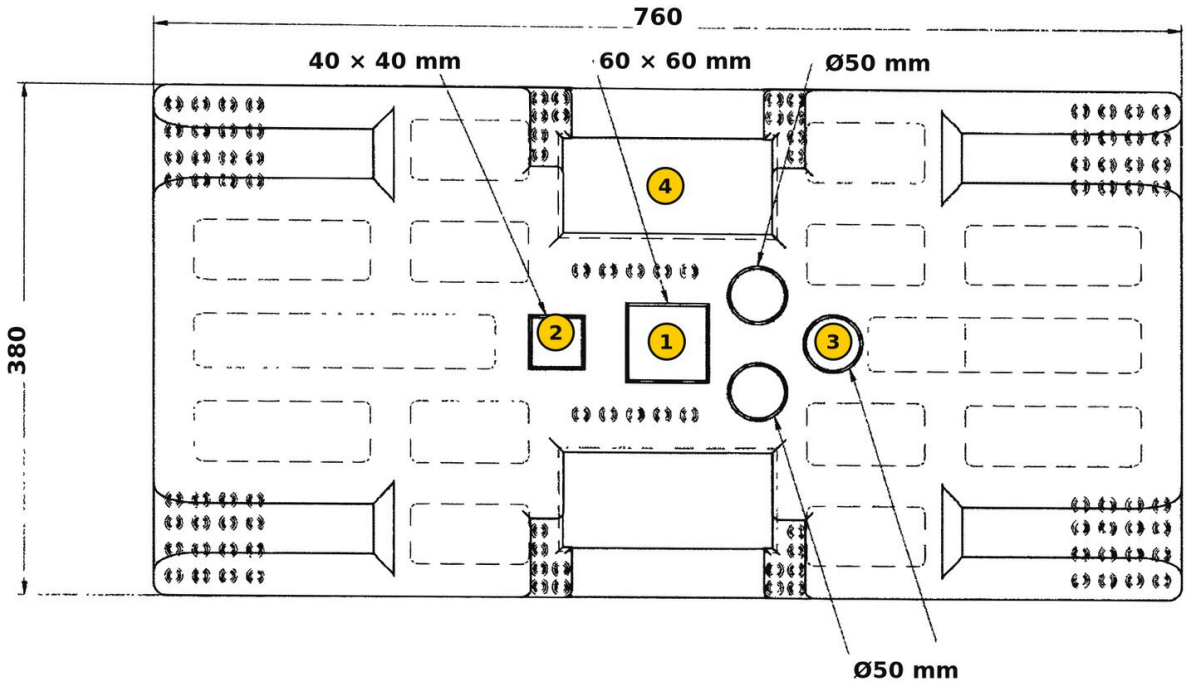

1 Locaș 60 × 60 mm – piciorul balizei V3-V4 (cu inserție Z)
60 × 60 mm socket – foot of the V3-V4 marker (with the Z insert)

2 Locaș 40 × 40 mm – stâlpi pătrați de 40 mm
40 × 40 mm socket – 40 mm square posts

3 3 găuri Ø50 mm – stâlpi rotunzi de Ø50 mm
3 holes Ø50 mm – Ø50 mm round posts

4 Mânere de transport, de ambele părți
Carrying handles on both sides

What fits each socket of the V2-28 base

Drawings and details · 3/3

Montaj în suportul mobil V2-28

Fitting into the V2-28 portable base





Inserție din tablă zincată în formă de Z
Galvanised steel Z insert

1. Baliză V3-V4, față retroreflectorizantă 25 × 100 cm pe ambele părți
   V3-V4 marker, 25 × 100 cm retroreflective face on both sides
2. Piciorul de 60 × 60 mm, cu Z din tablă zincată, intră în locașul din mijloc al suportului
   The 60 × 60 mm foot with the galvanised steel Z goes into the base's middle socket
3. Suport V2-28 (28 kg), cu locaș de 60 × 60 mm
   V2-28 (28 kg) base with a 60 × 60 mm socket

Fitting into the V2-28 portable base