# Housing with Ø200 mm LED Lights for V11 Mobile Traffic Light, without Countdown, Spare Part



## AT A GLANCE

- Housing with Ø200 mm LED lights (signal head).
- For the V11 mobile traffic light without countdown (V11-20).
- 25 × 15 × 75 cm, 5 kg.

| | |
|---|---|
| Product code | **V11-SUPORT** |
| Category | **Warning Lights** |
| Weight | **5 kg** |

This product on attotrafic.ro
**https://attotrafic.ro/en_US/products/carcasa-cu-lumini-led-o200-mm-pentru-semafor-mobil-v11-fara-numaratoare-piesa-de-schimb**

## Technical specifications

| | |
|---|---|
| **Type** | complete signal head (housing with lights) |
| **Lights** | 3 x LED D-200 mm (red, yellow, green) |
| **Connection** | multi-pole cable, 5-pole male connector |
| **Maximum power** | 32 W at 12 V |
| **Light intensity** | automatic, by ambient light |
| **Compatible with** | V11-20 (without countdown) |
| **Housing colour** | Black |

## Description

The V11-SUPORT is the complete signal head: the 75 cm black housing with the three Ø200 mm LED lights mounted one above the other. It is the spare part for the version of the V11 mobile traffic light without countdown, that is, for the V11-20 set.

### When you need it

When the signal head has been hit and the housing is broken, or when you want to replace all three lights at once. It is simpler than changing each light separately.

### How it connects

The head has a multi-pole cable with a 5-pole male connector, which plugs into the signal head connector of the control unit. The head draws at most 32 W at 12 V, and the light intensity adjusts automatically to the ambient light.

## Technical data

- housing with 3 Ø200 mm LED lights;
- maximum power 32 W at 12 V;
- 25 × 15 × 75 cm;
- 5 kg.

## Separate lights

If only one light is faulty, you can replace it on its own: red V11-D200-R, yellow V11-D200-Y or green V11-D200-G. The traffic light's control unit shows a code that tells you which light has failed.


## Traffic light control

The unit that controls the lights is a separate part, the V11-CONTROL, and only needs ordering if it has failed too. This housing has no countdown; the set with a countdown is the V11-21.

## Drawings and details · 1/3

**Dimensiuni**
Dimensions
cm

**V11-SUPORT**

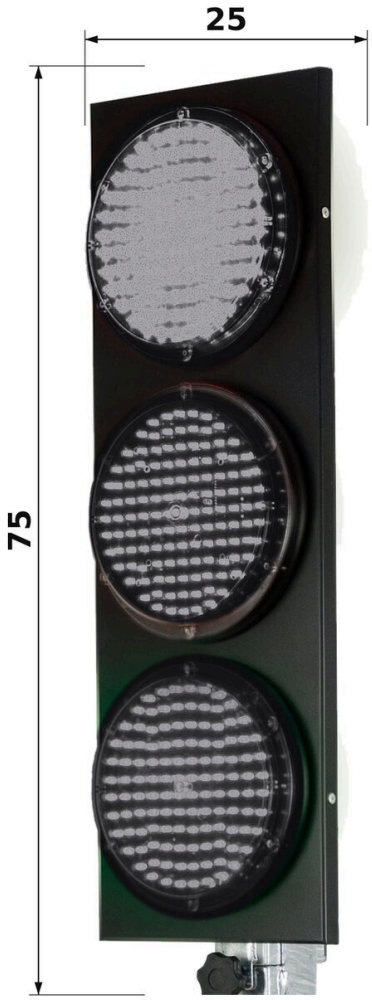


Adâncime 15 cm, 5 kg. Lumini LED D-200 mm. 32 W la 12 V.
Depth 15 cm, 5 kg. D-200 mm LED lights. 32 W at 12 V.

V11-SUPORT dimensions

## Drawings and details · 2/3

**Detalii**
Details


**V11-SUPORT**




**Stins: lentile transparente**
Off: clear lenses



**Aprins: lumina roșie, sus**
On: the red light, on top

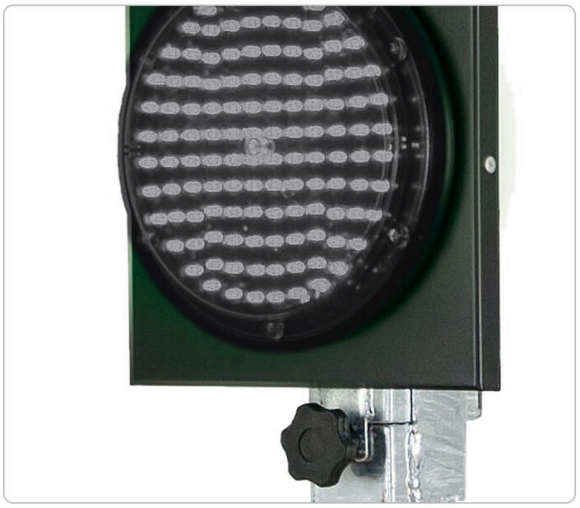

**Buton de strângere pe stâlp, jos**
Knob that tightens on the pole, at the bottom

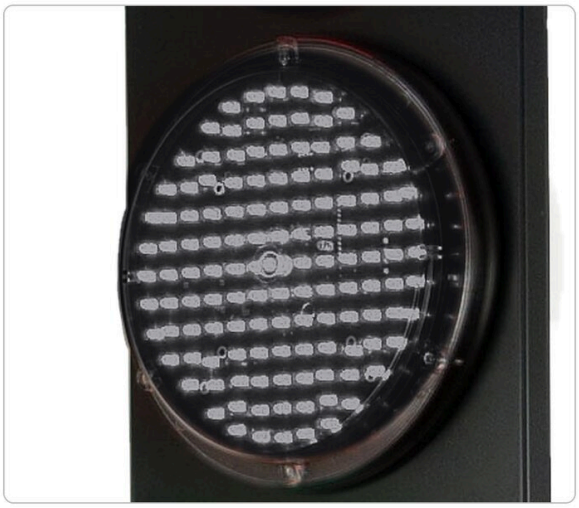

**Lentilă transparentă, cu LED-uri**
Clear lens, with LEDs

V11-SUPORT details

## Drawings and details · 3/3

**Pe semaforul V11-20**
On the V11-20 traffic light

**V11-SUPORT**




Conector tată cu 5 poli, în unitatea de control.
5-pole male connector, into the control unit.

V11-SUPORT: on the traffic light