Galvanised Clamp with Anti-Rotation Pin for Ø48 mm Post



AT A GLANCE

- Galvanised metal clamp for a Ø48 mm post.
- Anti-rotation pin; bolts and nuts included.
- 2 clamps for a normal-size sign.
- For mounting road signs on a post.

Product code	**ATT 48c**
Category	**Road Safety Accessories**
Weight	**0.1 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/clema-zincata-cu-stift-antirotatie-pentru-stalp-o48-mm

Technical specifications

Type	Clamp for fixing a sign to a post
Post diameter	Ø48 mm
Material	Zinc-coated metal
Shape	Omega shape, with two drilled lugs
Included	Bolts and nuts
How many	2 clamps for a standard-size sign

Description

A sign held only by a plain strap will, after a few gusts of wind, turn on its post and point the wrong way. The ATT 48c is the clamp used to mount road signs on Ø48 mm posts: its anti-rotation pin stops the sign turning on the post, so it keeps facing the right way.

Technical data

- for posts with a 48 mm diameter;
- material: galvanised metal;
- anti-rotation pin;
- bolts and nuts included;
- weight: 0.1 kg.

Fitting

The clamp is omega-shaped with two drilled lugs. It wraps around the post, and the lugs are bolted to the back of the sign with the bolts and nuts supplied. A normal-size sign takes 2 clamps, one at the top and one at the bottom. The galvanising protects the metal from rust.

Which posts

It fits Ø48 mm sign posts. The top end of the post is closed with the ATT 48d plastic cap. For Ø60 mm posts, use the ATT 60c clamp.


Where it is used

When mounting warning, prohibition, mandatory or information signs on new posts, or when replacing old, rusty clamps.

Drawings and details · 1/3

Dimensiuni
Dimensions
mm

ATT 48c

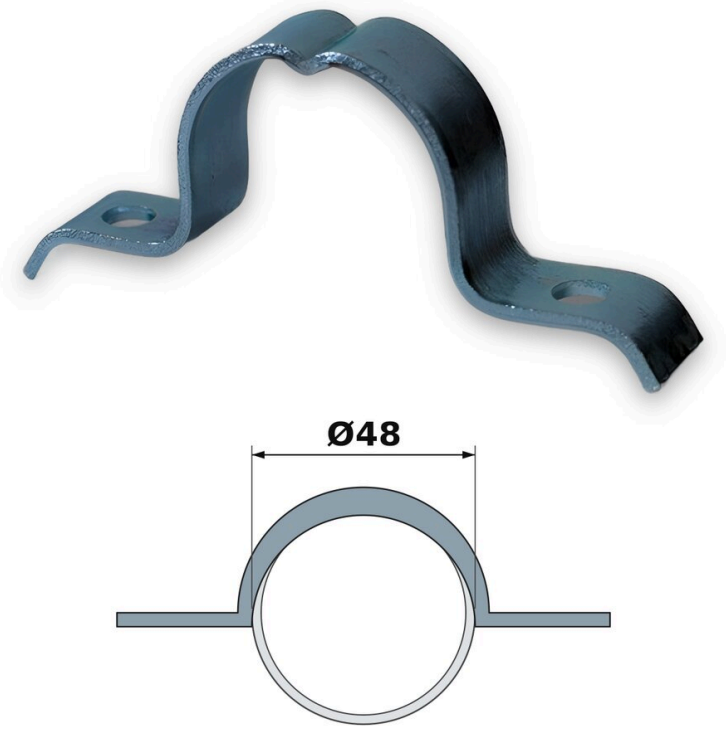

stâlpul, văzut de sus · the post, seen from above

Clema se strânge pe stâlpul de Ø48 mm; prin urechi se prinde de indicator.
The clamp closes around the Ø48 mm post; the lugs bolt to the sign.

Clemă pentru prinderea indicatorului pe stâlp, metal zincat; greutate 100 g.
Clamp for fixing a sign to a post, Zinc-coated metal; weight 100 g.
Diametru stâlp: ø48 mm.
Post diameter: ø48 mm.
Formă: omega, cu două urechi găurite.
Shape: omega shape, with two drilled lugs.
Incluse: șuruburi și piulițe.
Included: bolts and nuts.

ATT 48c dimensions


Drawings and details · 2/3

Detalii
Details

ATT 48c




Ureche găurită, pentru șurub
Drilled lug, for a bolt

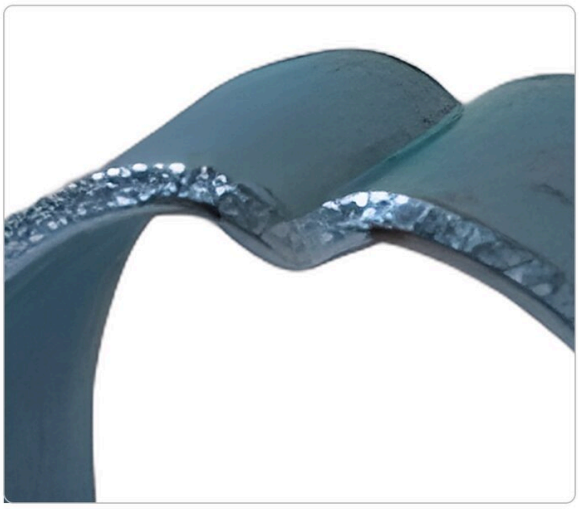

Partea de sus a arcului
The top of the arch



Tablă zincată, îndoită în formă de omega
Galvanised sheet, bent into an omega

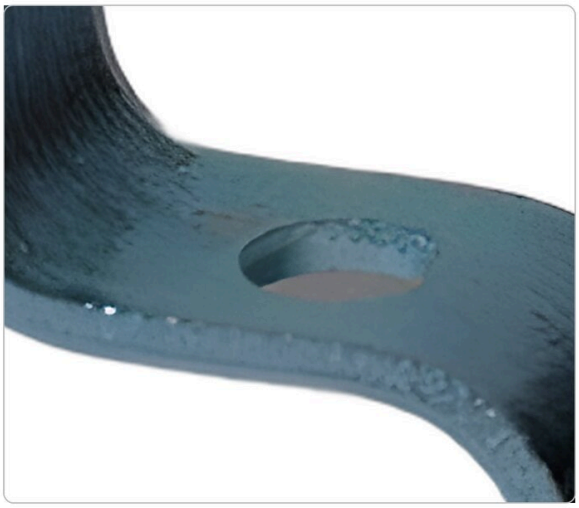


A doua ureche, pe partea opusă
The second lug, on the opposite side

ATT 48c details

Drawings and details · 3/3

Cum se montează **ATT 48c**

How it is fitted

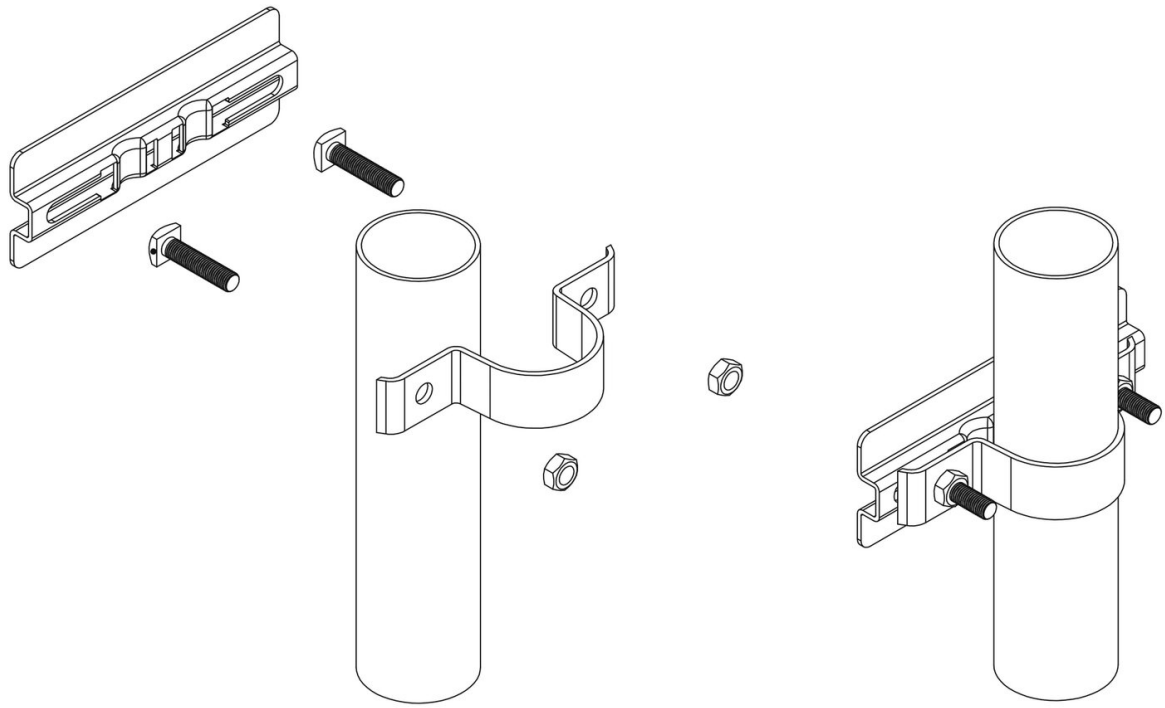

Înainte de strângere
Before tightening

Montat
Fitted

Pe spatele indicatorului e canalul de prindere: șuruburile cu cap pătrat intră în canal, clema înconjoară stâlpul, piulițele se strâng pe urechi.
The fixing channel is on the back of the sign: the square-head bolts slide into it, the clamp goes round the post and the nuts tighten on the lugs.

Pentru un indicator de mărime normală se folosesc 2 cleme, una sus și una jos.
A standard-size sign takes 2 clamps, one at the top and one at the bottom.

Șuruburile și piulițele sunt incluse.
Bolts and nuts are included.

How ATT 48c is used