Traffic Cone, PVC, 52 cm, 2 Reflective Bands

PREMIUM | Signs compliant with SR 1848-1:2024



AT A GLANCE

- PVC traffic cone, orange, 52 cm with the loop.
- 2 honeycomb reflective bands.
- 28 cm octagonal base, 1.3 kg.
- Flexible and weather-resistant.
- Loop on top, Ø35 mm thread underneath.

Product code	**V6-50R2**
Category	**Traffic Cones**
Brand	**Atto Trafic**
Weight	**1.3 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/con-rutier-din-pvc-52-cm-2-benzi-reflectorizante

Technical specifications

Material	PVC
Color	Orange
Height	52 cm with the loop, 48.5 cm without it
Size (Base)	28 × 28 cm
Base Shape	Octagon
Reflective	2 white honeycomb bands, 7.9 + 7.9 cm
Top	Moulded loop, 3.5 cm, cut off for the Ø35 mm thread
Chain Fixing	At the top, with the ATZ 101A and ATZ 330A hooks (not included)
Working Temperature	-20 … +60 °C
Standard	EN 13422

Description

The 52 cm cone is the one most used to close off a lane, an entrance or a parking bay quickly. It goes where work is being done on the carriageway, where access is prohibited, in car parks and on building sites, and is packed away just as quickly.

Material

It is made of PVC, the material of the premium series: bright orange, flexible and weather-resistant. If a car clips it, the cone bends instead of cracking.

Visibility

The body carries 2 white honeycomb reflective bands that show up in the headlights.

Dimensions

- 52 cm high including the loop;
- 28 × 28 cm octagonal base;
- 1.3 kg.

Easy to move

At 1.3 kg the cone can be picked up and moved with one hand, so a crew can shift it as the work moves along.

Versions

With a weighted base, for windy spots, it is the V6-50AR2. The economy PE version is the V6-50R2E, and a taller 75 cm cone is the V6-70R2.

Top of the cone

The cone comes with a loop moulded on top. To fit a plastic sign, a lamp or the ATZ 101A hook, cut off the loop: underneath is the Ø35 mm thread, which they screw straight into, with no adapter.

Chain and stacking


The plastic chain fastens at the top: screw the ATZ 101A hook into the thread, then fasten the chain to its ring with the ATZ 330A hook. That is how you link the cones together. The hooks and the chain are ordered separately. The cones stack inside each other, and the base has feet and channels that let the water drain.

What the roadworks rules require (Order 1112/411/2000)

SR 1848-1:2024 provides the traffic cone (V6) to protect freshly applied markings, to mark off small works and to sign police crews at accident scenes. In a work-zone signing layout, cones belong to the signing that marks the works, together with barrier boards and markers, installed after the advance signing. The methodological rules approved by Order MI/MT no. 1112/411/2000 require temporary signing to be retroreflective at night wherever the existing signing is. Compared with the 2011 edition, SR 1848-1:2024 specifies orange instead of red for the V6 cone, and this cone is orange.

The contractor installs the signing to the layout approved by the road authority with the traffic police's agreement, maintains and completes it for the whole job and removes it at the end; accidents caused by incomplete or missing temporary signing are entirely the contractor's responsibility.


Drawings and details · 1/3

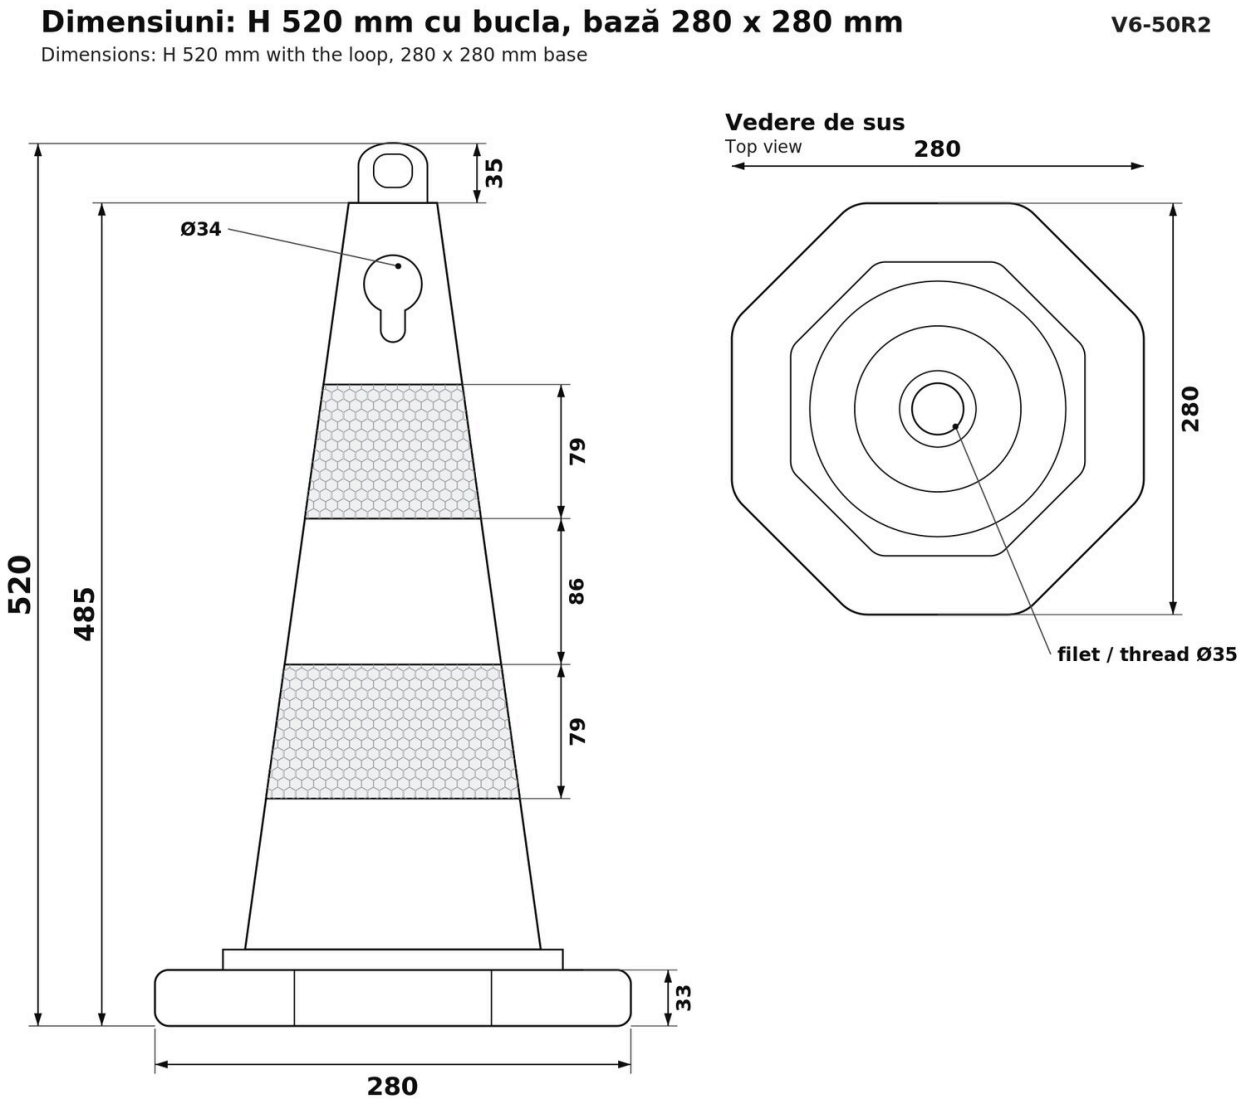

Dimensiuni în mm. Înălțime cu bucla: 520. Bucla de 35 mm se taie pentru filetul Ø35 mm și conul rămâne de 485 mm.
Dimensions in mm. Height with the loop: 520. Cut off the 35 mm loop to use the Ø35 mm thread and the cone is 485 mm.
PVC, portocaliu, 1,3 kg; 2 benzi albe tip fagure, 79 + 79 mm.
PVC, orange, 1.3 kg; 2 white honeycomb bands, 79 + 79 mm.
Conul și baza octogonală sunt dintr-o singură bucată, cu picioare și canale pentru scurgerea apei.
Cone and octagonal base are one piece, with feet and channels that let the water drain.

V6-50R2 dimensions, height and base, top view

Drawings and details · 2/3

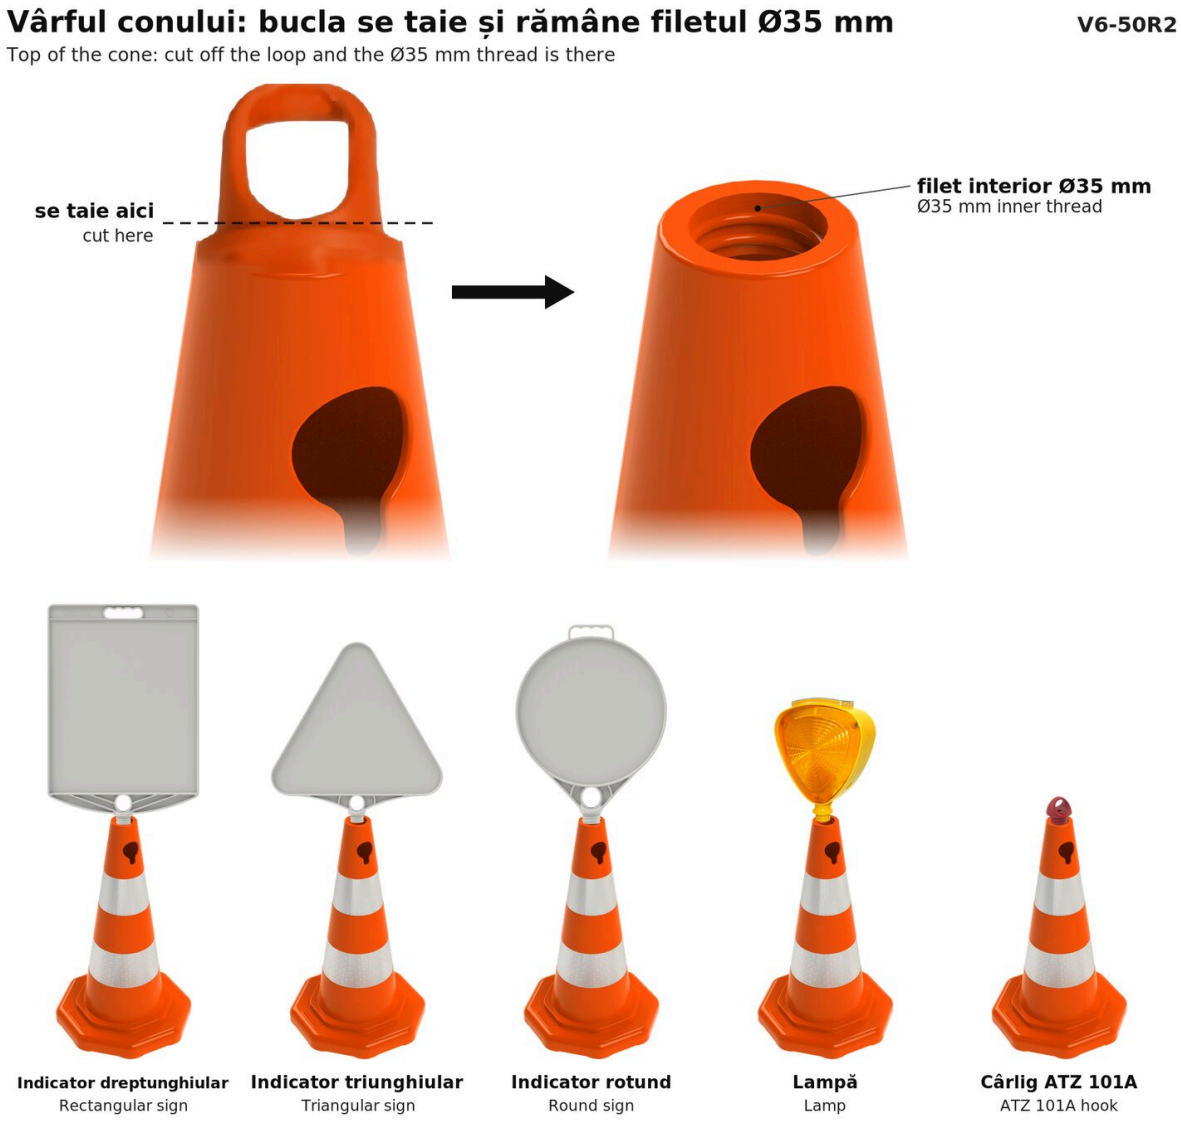


În filet se înșurubează direct, fără adaptor: indicatoare din plastic cu filet, o lampă sau cârligul ATZ 101A.
These screw straight into the thread, no adapter: threaded plastic signs, a lamp or the ATZ 101A hook.
Acestea se comandă separat.
They are ordered separately.

V6-50R2 top: cut off the loop to use the Ø35 mm thread, with signs, lamp and hook

Drawings and details · 3/3

Lanț, stivuire și bază V6-50R2
Chain, stacking and base

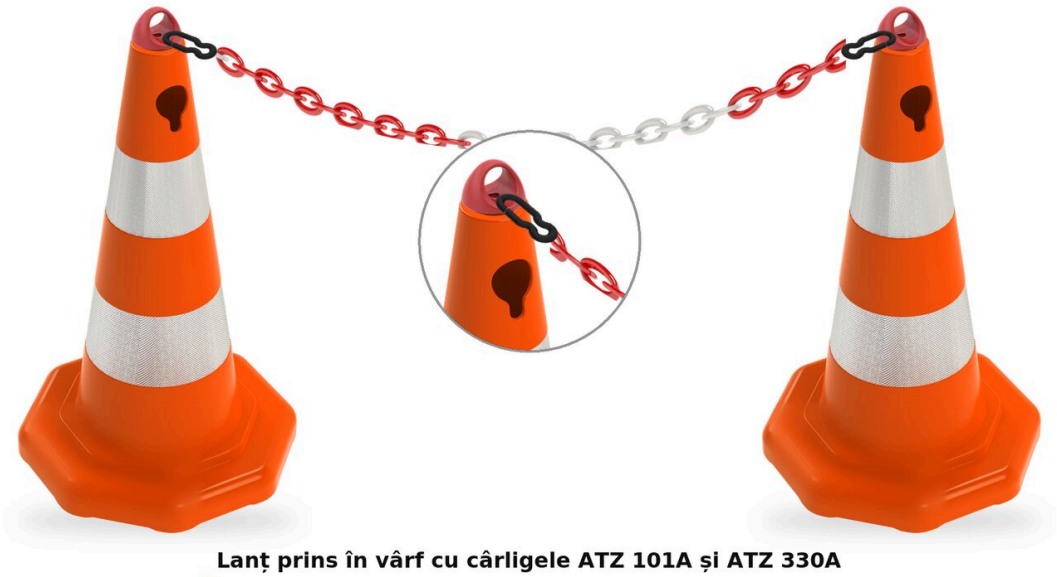

Lanț prins în vârf cu cârligele ATZ 101A și ATZ 330A
Chain fixed at the top with the ATZ 101A and ATZ 330A hooks



Se stivuiesc unul în altul
They stack inside each other



Bază octogonală
Octagonal base

Baza are picioare și canale pentru scurgerea apei.
The base has feet and channels that let the water drain.
Bucla din vârful conului se taie înainte de a monta cârligul.
Cut off the loop at the top of the cone before fitting the hook.

V6-50R2: chain fixed at the top and base