Forest Road Name Sign, 90×50 cm, Class I

Class I (EGP) Road Signs



AT A GLANCE

- Forest road name sign, with your road's name made to order.
- 90 × 50 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**DF-DENUMIRE**
Category	**Forest Road Signs**
Weight	**4 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/indicator-denumire-drum-forestier-90×50-cm-clasa-i

Technical specifications

Type	Special sign for forest roads
Normative	ID-001-15, Annex VII, no. 1
Shape and colours	Blue rectangle with a white border and the white words DRUM FORESTIER and the road's name
Size	90 × 50 cm
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant
Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)

Sheeting service life	7 years
Fixings included	2 clamps, 4 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-2:2011
Marking	CE

Description

The forest road name sign goes at the entrance to the road and shows its name: a 90 × 50 cm blue panel with a 15 mm white border, DRUM FORESTIER (forest road) on the first line and the road's name on the second, both in white.

Where it goes

Under normative ID-001-15, it stands 15–30 m into the forest road, on the right-hand side, where the road joins a public road. It is used only on roads with no through exit. On roads closed to public traffic, the "Public traffic prohibited" sign goes below it on the same post, with the road number plate above.

Size and text

The text follows the Annex VII drawing: DRUM FORESTIER in 100 mm letters and the name in 120 mm letters. The name is written in full, without abbreviations and with diacritics, as the normative requires; the SR 1848-3 narrow letters are squeezed as much as needed for the name to fit at the normative's height. The pictures show the normative's example, "Valea Corbului"; you send the name of your road after ordering.

When class I is used

Class I (RA1) sheeting returns 70 cd/(lx·m²) for white to the driver and has a 7-year service life, enough on roads where headlights are the only light, such as forest roads. In areas with street lighting, shop windows, advertising and dense urban traffic, however, SR 1848-2 requires prismatic class 2 or 3 sheeting.

Technical data

- 90 × 50 cm panel: blue rectangle with a white border and the white words DRUM FORESTIER and the road's name;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts;
- CE marked; sheet, sheeting and construction to SR EN 12899-1:2007 and SR 1848-2:2011.

Mounting

It is sign no. 1 of Annex VII of the forest road maintenance and repair normative ID-001-15, approved by Order 482/2015. Fixings for the post are included: 2 clamps for Ø48 mm posts and 4 bolts with nuts; clamps for Ø60 mm posts are available on request.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. The normative asks for the sign to be clearly visible from 1.50–1.70 m and, when several signs share a post, for the lowest to be at least 1.20 m above the ground.

Drawings and details · 1/3

DF1 – Indicator de denumire a drumului forestier

Forest road name sign

90 x 50 cm · dimensiunile feței indicatorului

90 x 50 cm · sign face dimensions




Dimensiuni (mm) Dimensions (mm)
90 x 50 cm 900 x 500 · r = 30 drumuri forestiere forest roads

Scrisul și chenarul de 15 mm se execută în alb.
Lettering and the 15 mm border are white.
Rânduri: 15 / 95 / H 100 / 60 / H 120 / 95 / 15 mm.
Rows: 15 / 95 / H 100 / 60 / H 120 / 95 / 15 mm.
Denumirea drumului se scrie complet, fără prescurtări, cu diacritice; exemplul este cel din normativ.
The road name is written in full, without abbreviations, with diacritics; the example is the one in the normative.
Litere SR 1848-3 tip „îngust”, îngustate pe orizontală la 78 %, ca denumirea să încapă la înălțimea din normativ; minimum 30 mm până la chenar.
SR 1848-3 narrow letters, squeezed horizontally to 78 % so the name fits at the normative's height; at least 30 mm to the border.
Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).
Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).
Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).
Scriere SR 1848-3: tip „îngust”, H = 100 mm; tip „îngust”, H = 120 mm.
SR 1848-3 lettering: narrow type, H = 100 mm; narrow type, H = 120 mm.
Dimensiuni după normativul ID-001-15, anexa VII (Ordinul MMAP 482/2015).
Dimensions from normative ID-001-15, Annex VII (MMAP Order 482/2015).

DF-DENUMIRE dimensions


Drawings and details · 2/3

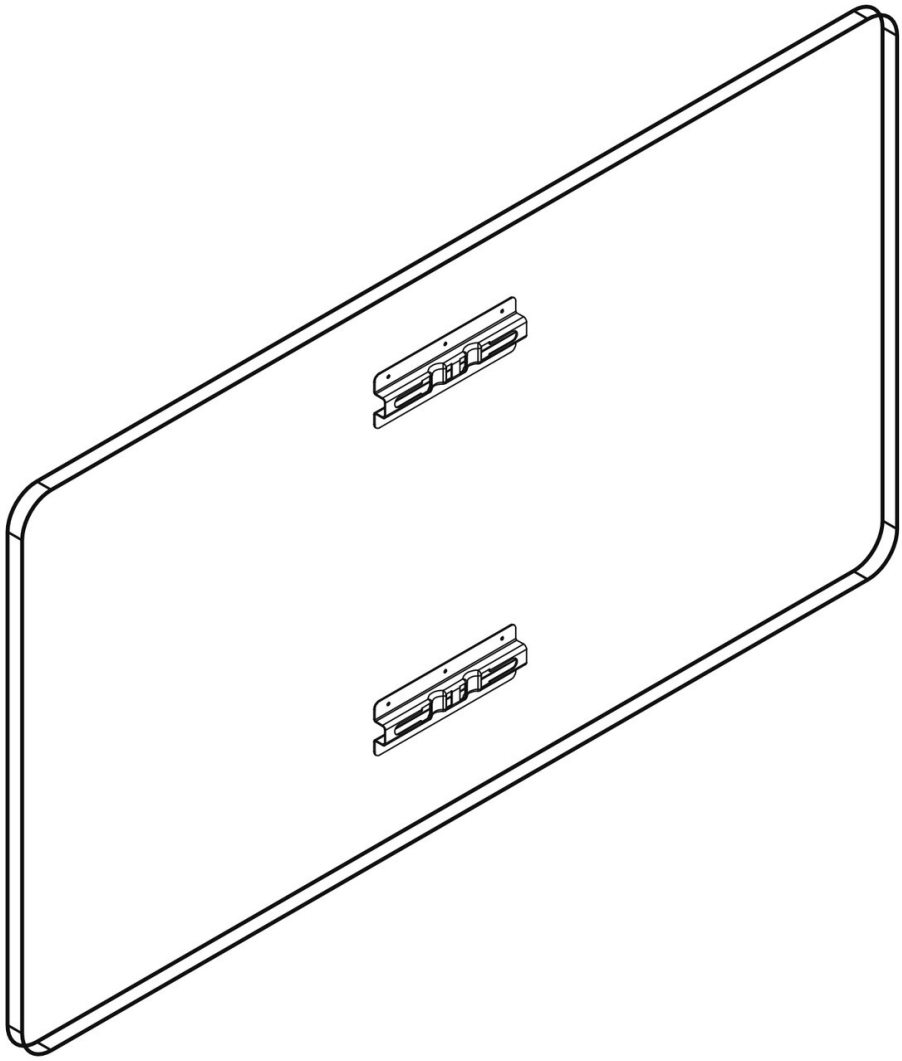

Back of the DF-DENUMIRE panel

Drawings and details · 3/3

Prindere cu canal și colier, stâlp Ø48 mm
Channel and clamp fixing, Ø48 mm post

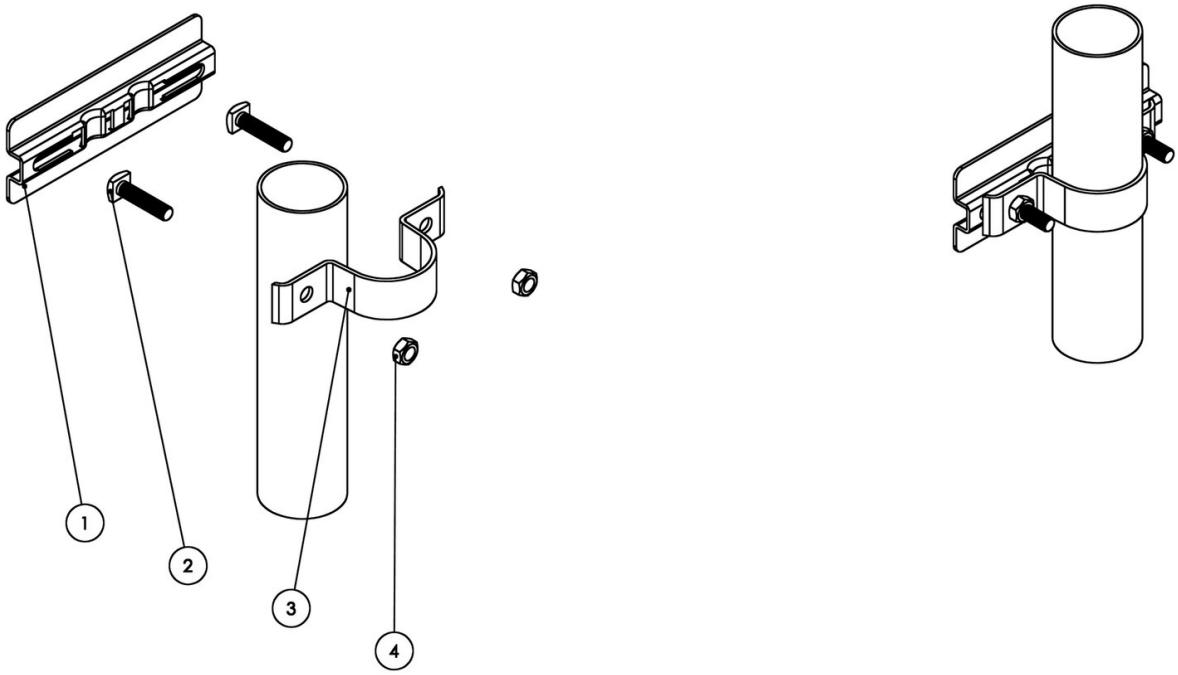

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.

DF-DENUMIRE fixing system