Forest Road Number Plate, 54×48 cm, Class I

Class I (EGP) Road Signs



AT A GLANCE

- Forest road number plate, with the road number and kilometres made to order.
- 54 × 48 cm, in 1 mm galvanised steel sheet.
- Class I retroreflective sheeting, 7-year service life.
- Fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts.
- CE marked; sheeting and paint resistant to UV and weathering.

Product code	**DF-IDENTIFICARE**
Category	**Forest Road Signs**
Weight	**2.3 kg**
Compliance	**Class I (EGP) Road Signs**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/indicator-identificare-drum-forestier-54×48-cm-clasa-i

Technical specifications

Type	Special sign for forest roads
Normative	ID-001-15, Annex VII, no. 5
Shape and colours	White rectangle with the road number in a black-bordered box and the kilometre line, in black
Size	54 × 48 cm
Material	Galvanised steel sheet, 1 mm
Construction	Rounded corners, pressed edges, no sharp edges
Painting	Electrostatic, UV-resistant paint
Retroreflective sheeting	Class I (RA1), UV-resistant
Retroreflection (white, 0.2°/5°)	70 cd/(lx·m²)

Sheeting service life	7 years
Fixings included	2 clamps, 4 bolts with nuts
Post diameter	Ø48 mm (Ø60 mm on request)
Standards	SR EN 12899-1:2007, SR 1848-2:2011
Marking	CE

Description

The forest road number plate shows the road's order number: a 54 × 48 cm white panel with the number in a black-bordered box, for example D9, and below it a line with kilometres, as in the normative's example, 12 km.

Where it goes

Under normative ID-001-15, it goes on the same post as the forest road name sign or the junction direction sign, above them, as in the grouping of Annex VIII. It identifies the forest road's order number.

Size and text

The normative gives no dimensions for this plate, so it is drawn after the Annex VII example: the road number in a 300 × 150 mm box with a black border, with 100 mm letters and figures, and the kilometre line below, also in 100 mm characters. You send the number and the kilometre line after ordering.

When class I is used

Class I (RA1) sheeting returns 70 cd/(lx·m²) for white to the driver and has a 7-year service life, enough on roads where headlights are the only light, such as forest roads. In areas with street lighting, shop windows, advertising and dense urban traffic, however, SR 1848-2 requires prismatic class 2 or 3 sheeting.

Technical data

- 54 × 48 cm panel: white rectangle with the road number in a black-bordered box and the kilometre line, in black;
- 1 mm galvanised steel sheet, with rounded corners and pressed edges, no sharp edges;
- electrostatically painted with UV-resistant paint;
- class I retroreflective sheeting (RA1), resistant to UV and weathering, with a 7-year service life;
- fixings included: 2 clamps for Ø48 mm posts and 4 bolts with nuts;
- CE marked; sheet, sheeting and construction to SR EN 12899-1:2007 and SR 1848-2:2011.

Mounting

It is sign no. 5 of Annex VII of the forest road maintenance and repair normative ID-001-15, approved by Order 482/2015. Fixings for the post are included: 2 clamps for Ø48 mm posts and 4 bolts with nuts; clamps for Ø60 mm posts are available on request.

The post is ordered separately. For a fixed installation in a concrete foundation: the galvanised Ø48 mm post, 300 cm. The normative asks for the sign to be clearly visible from 1.50–1.70 m and, when several signs share a post, for the lowest to be at least 1.20 m above the ground.


Drawings and details · 1/3

DF5 – Indicator pentru identificarea drumurilor forestiere

Forest road number plate

54 x 48 cm · dimensiunile feței indicatorului

54 x 48 cm · sign face dimensions

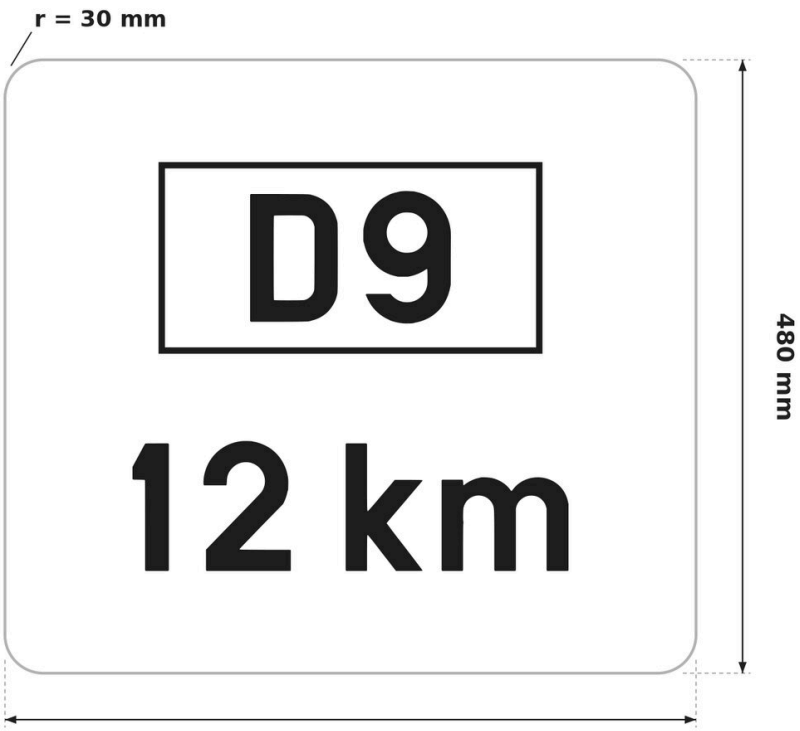

Dimensiuni (mm) Dimensions (mm)
54 x 48 cm 540 x 480 · r = 30 drumuri forestiere forest roads

Așezare după exemplul din anexa VII (nr. 5): numărul în casetă, dedesubt kilometrii; normativul nu dă cote.
Layout as in the Annex VII example (no. 5): the number in a box, the kilometres below; the normative gives no dimensions.

Propuse după proporțiile desenului: casetă 300 x 150, chenar negru 5, scriere tip normal H 100.
Proposed from the drawing's proportions: box 300 x 150, black border 5, normal lettering H 100.

Panoul suport depășește fața cu 5–10 mm (SR 1848-2, 6.1).
The backing panel is 5–10 mm larger than the face (SR 1848-2, 6.1).


Colțurile se racordează cu raza r = 30 mm (SR 1848-2, 6.6).
Corners are rounded with radius r = 30 mm (SR 1848-2, 6.6).

Scriere SR 1848-3: tip „normal”, H = 100 mm.
SR 1848-3 lettering: normal type, H = 100 mm.

Dimensiuni după normativul ID-001-15, anexa VII (Ordinul MMAP 482/2015).
Dimensions from normative ID-001-15, Annex VII (MMAP Order 482/2015).

DF-IDENTIFICARE dimensions


Drawings and details · 2/3

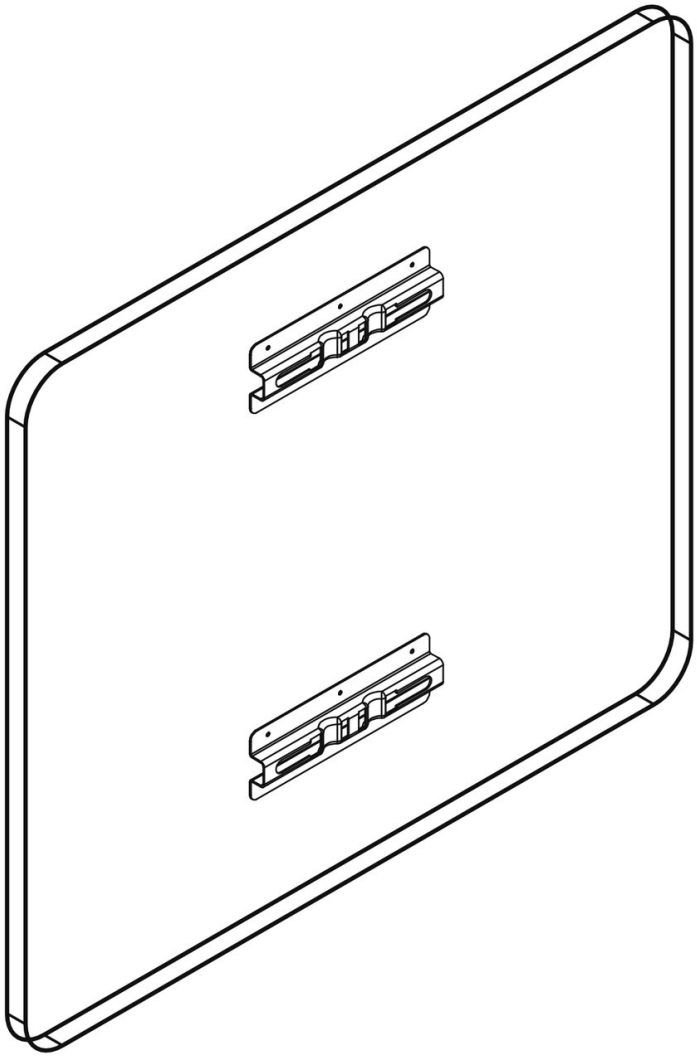

Back of the DF-IDENTIFICARE panel

Drawings and details · 3/3

Prindere cu canal și colier, stâlp Ø48 mm
Channel and clamp fixing, Ø48 mm post

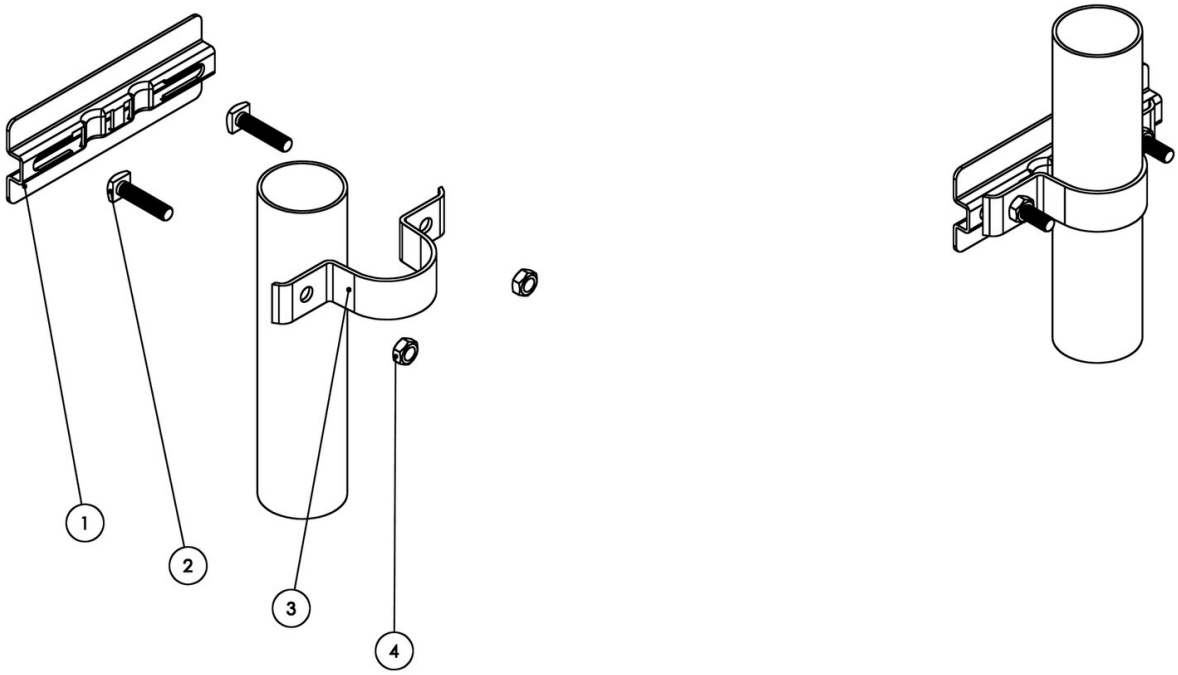

1 Canal de prindere din aluminiu (pe spatele panoului)
Aluminium fixing channel (on the back of the panel)

2 Șurub M8 × 35 cu cap pătrat, zincat (2 buc.)
M8 × 35 square-head bolt, galvanised (2 pcs)

3 Colier Ø48 mm din tablă zincată
Ø48 mm clamp, galvanised steel

4 Piuliță M8 zincată (2 buc.)
M8 nut, galvanised (2 pcs)

Set pentru un punct de prindere. Pentru stâlp Ø60 mm, colierele se livrează la cerere.
Set for one fixing point. Clamps for Ø60 mm posts are available on request.

DF-IDENTIFICARE fixing system