
Plastic Chain, 25 m Roll, Green-White, 6 mm

Signs compliant with SR 1848-1:2024

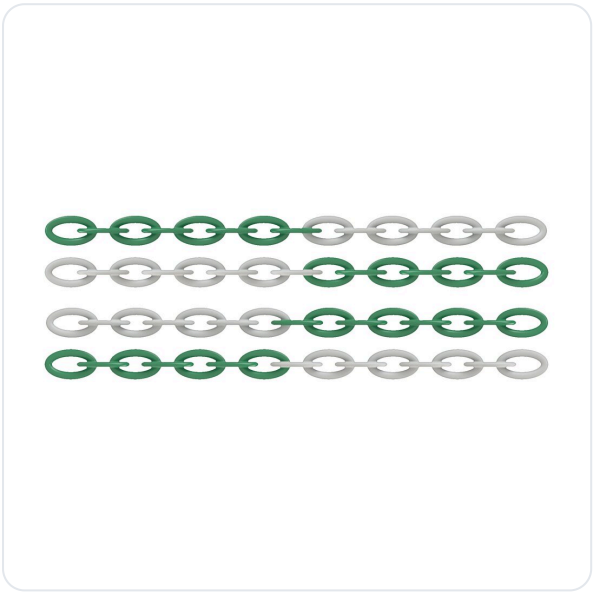

AT A GLANCE

- Green-white plastic chain, 6 mm.
- 25 m roll, 1.8 kg.
- Polypropylene (PP).

Product code	**V1-602**
Category	**Plastic Chains**
Weight	**1.8 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/lant-din-plastic-rola-de-25-m-verde-alb-6-mm

Technical specifications

Material	PP
Color	Green + White
Link	54.89 × 32.32 mm
Link Thickness	6 mm
Length	25 m, in one piece
Fixing	With the ATZ 330A hook (not included)

Description

The V1-602 is the 6 mm version of the green-white chain: 25 m in one piece, on a 1.8 kg roll, 0.7 kg lighter than the 8 mm roll. The colours suit green spaces and places where appearance matters: park paths, gardens, terraces, courtyards or entrance areas at an event.

Technical data

- length: 25 m;
- size: 6 mm;
- link: 54.89 × 32.32 mm;
- material: polypropylene (PP);
- weight: 1.8 kg per roll.

When to choose 6 mm

The 6 mm chain is thinner and less conspicuous. It suits showing a direction or an area people should not enter, especially between small or light posts. For a barrier that shows from a distance, choose the 8 mm version, the V1-802.

Installation

On portable posts it fastens at the top, to the ring of the ATZ 101A hook, for example on the ATZ 63100R2, and secure the ends with the ATZ 330A hook. To work out how much you need, add about 10% to the length of the route.

What the roadworks rules require (Order 1112/411/2000)


SR 1848-1:2024 provides the polyethylene garland or chain (V1) in built-up areas, to mark off works lengthwise. The methodological rules approved by Order MI/MT no. 1112/411/2000 require the contractor, among other things, to set up dedicated pedestrian corridors on the carriageway when the works take up the pavement. Marking off the work zone belongs to the signing that marks the works, installed after the advance signing.

The contractor installs the signing to the layout approved by the road authority with the traffic police's agreement, maintains and completes it for the whole job and removes it at the end; accidents caused by incomplete or missing temporary signing are entirely the contractor's responsibility.


Drawings and details · 1/3

Zala: 54,89 x 32,32 mm, grosime 6 mm V1-602

Link: 54.89 x 32.32 mm, 6 mm thick

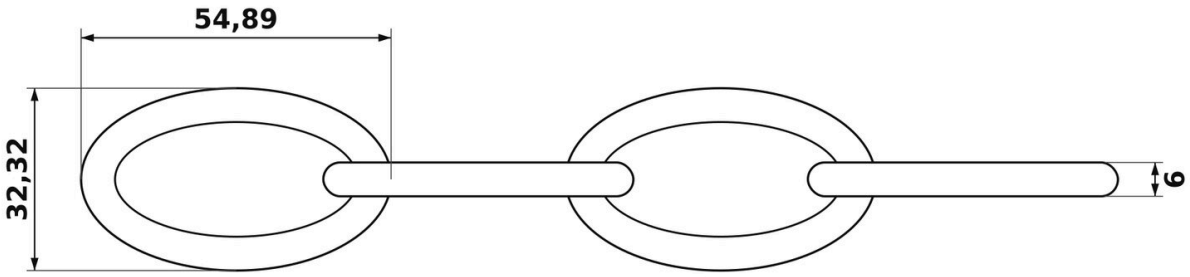

Dimensiuni în mm
Dimensions in mm

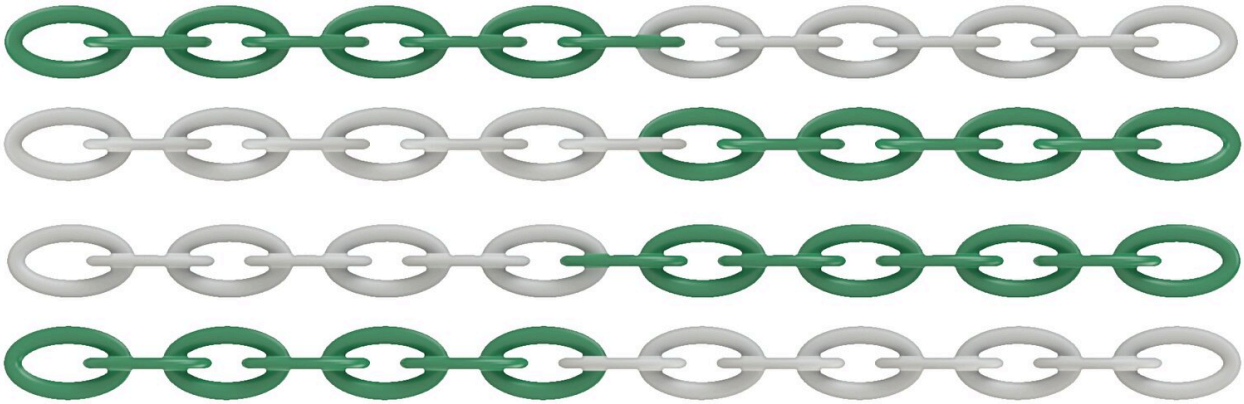


Zale albe și verzi, care alternează pe segmente
White and green links, alternating in segments

Rolă de 25 m, dintr-o singură bucată. Prețul este pentru o rolă.
25 m roll, in one piece. The price is for one roll.
Polipropilenă (PP), 1,8 kg pe rolă.
Polypropylene (PP), 1.8 kg per roll.

V1-602 link dimensions: 54.89 × 32.32 mm, 6 mm thick


Drawings and details · 2/3

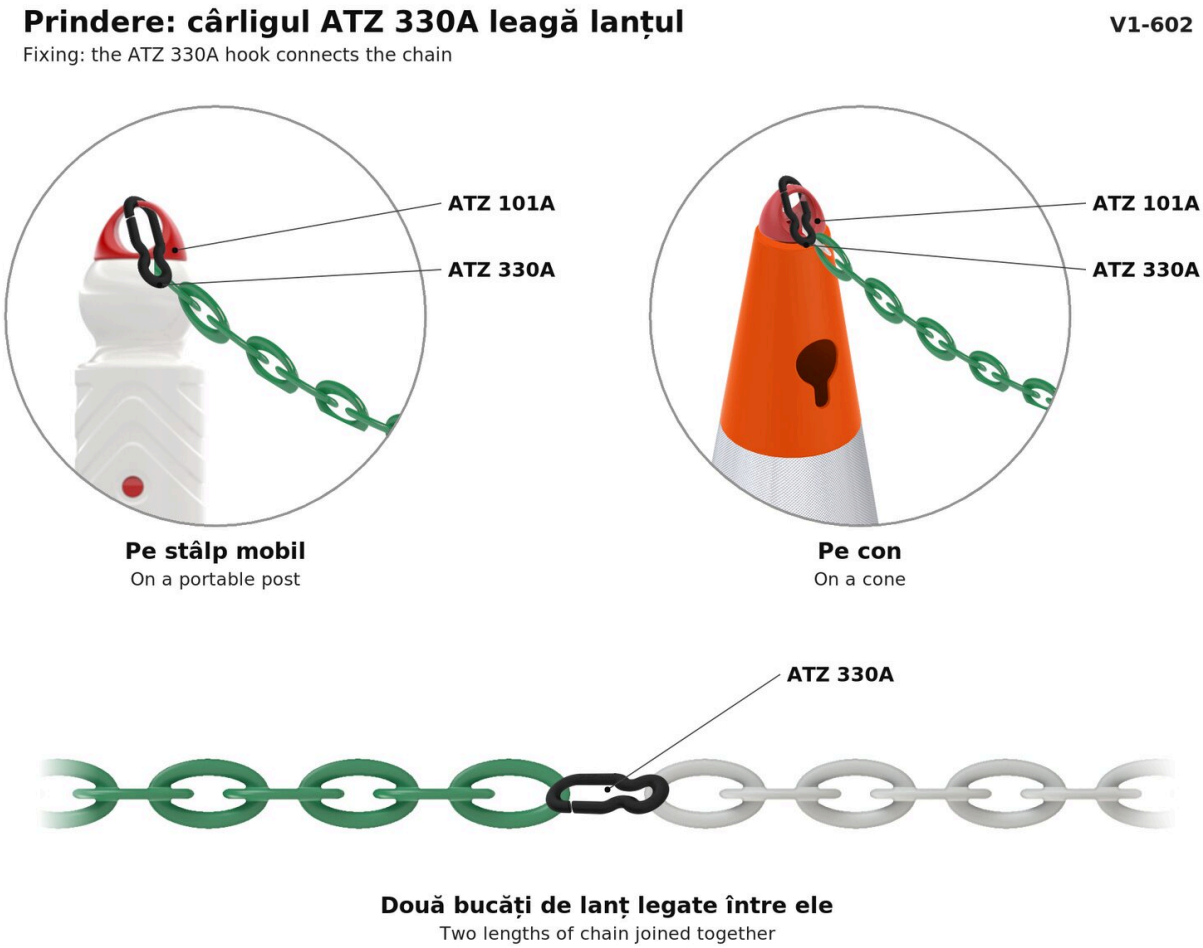

ATZ 101A se înșurubează în filetul Ø35 mm din vârf, iar ATZ 330A prinde lanțul de inelul lui.
The ATZ 101A screws into the Ø35 mm thread at the top, and the ATZ 330A fastens the chain to its ring.
Pe conurile cu buclă în vârf, bucla se taie mai întâi.
On cones with a loop on top, cut the loop off first.
Stâlpul metalic ATD 7580 are 2 inele, prin care treci direct lanțul.
The ATD 7580 steel bollard has 2 rings, the chain goes straight through them.
Cârligele se comandă separat.
The hooks are ordered separately.

V1-602: fixing with the ATZ 101A and ATZ 330A hooks, on a post and on a cone

Drawings and details · 3/3

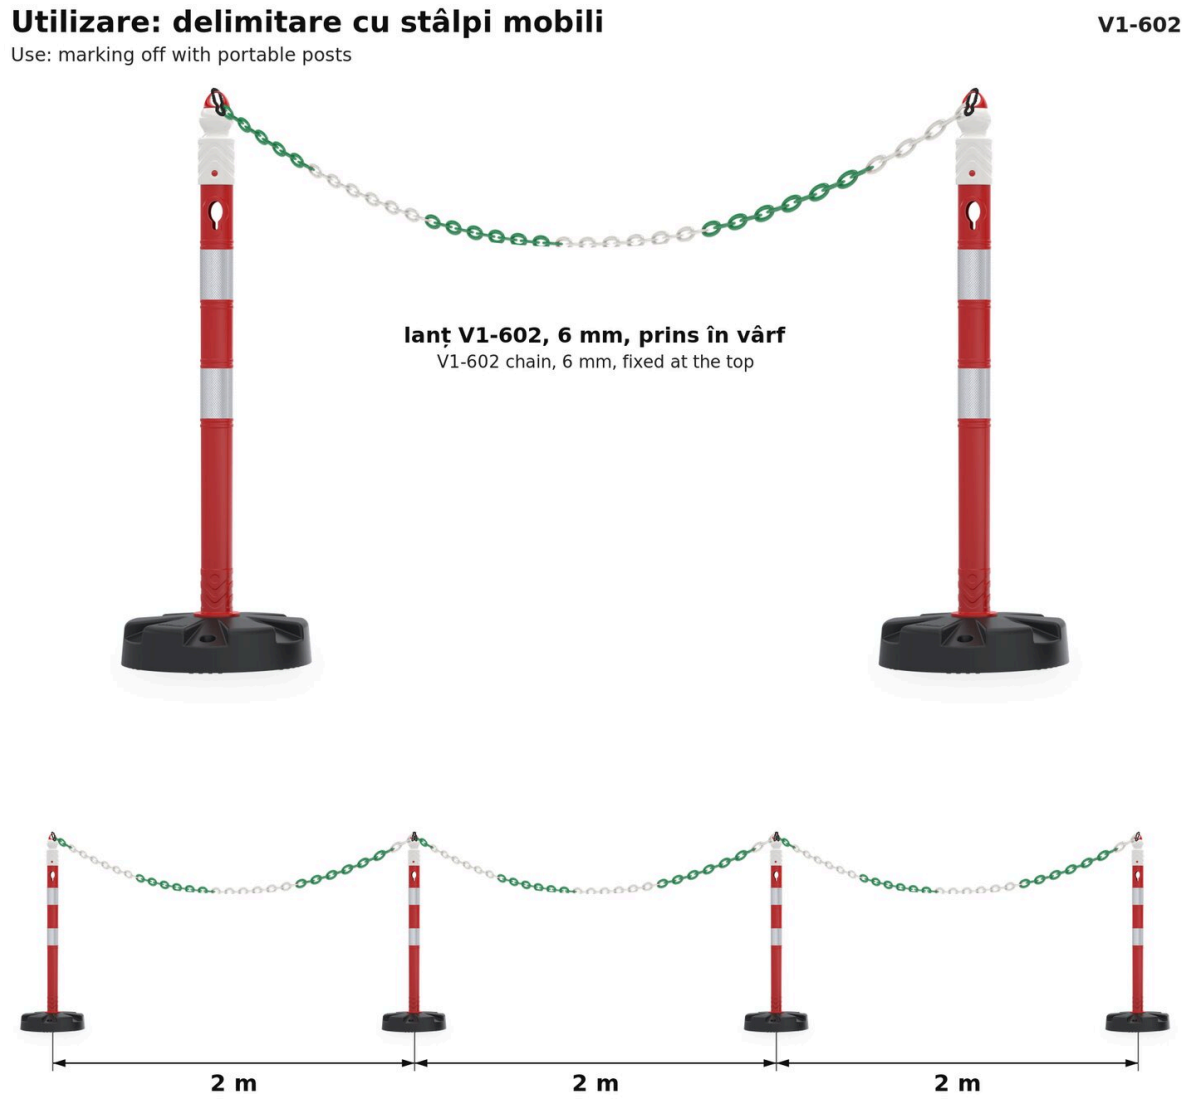

Cu stâlpi la fiecare 2 m, o rolă de 25 m acoperă în jur de 22 m, după ce lași lanțul să atârne puțin.
With posts every 2 m, one 25 m roll covers about 22 m once you let the chain hang slightly.
Stâlpii și cârligele se comandă separat.
The posts and hooks are ordered separately.

V1-602: chain between portable posts, 2 m apart