PPC Speed Bump with Reflectors, 33×25×5 cm

ECONOMIC | Signs compliant with SR 1848-1:2024



AT A GLANCE

- PPC, 33 × 25 × 5 cm, 1.5 kg; black or yellow.
- 6 cat's eye reflectors: 3 white on one side, 3 red on the other.
- For limiting speed to 10 km/h.
- 3 pieces per metre; price is per piece; anchors and bolts included.

Product code	**ATZ 50250**
Category	**Speed Bumps**
Brand	**Atto Trafic**
Weight	**1.5 kg**
Compliance	**Signs compliant with SR 1848-1:2024**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/limitator-de-viteza-din-ppc-cu-catadioptri-33×25×5-cm

Technical specifications

Material	PPC,PC
Limitation	10 km/h
Color	Black / Yellow
Reflective	6 Cat's Eye
Installation	4 Dowels, 4 Screws

Description

This is the smallest and lightest bump in the range: 33 cm long, 25 cm in the direction of travel, 5 cm high and 1.5 kg. The product sheet rates it for 10 km/h: it is the bump for places where cars should be almost at walking pace.

Black and yellow, alternated

It is sold per piece, in black or yellow, and in a row the pieces are alternated so they stand out from a distance. One long side carries 3 white cat's eye reflectors and the other 3 red ones, 6 per piece, which light up in the headlights.

Joining

The bumps and the end caps are separate parts that slot into one another. The edges are rounded and the surface is smooth, with lines engraved on top.

Fitting

- 3 pieces per metre;
- 4 anchors and 4 bolts per piece, included;
- at the ends: the ATZ 50251 cap.


Where it fits

Underground car parks, shared garages, petrol stations, company yards and routes through work areas, where traffic moves at 10 km/h.

Drawings and details · 1/4

Dimensiuni: 33,4 x 25 x 5 cm
Dimensions: 33.4 x 25 x 5 cm

ATZ 50250

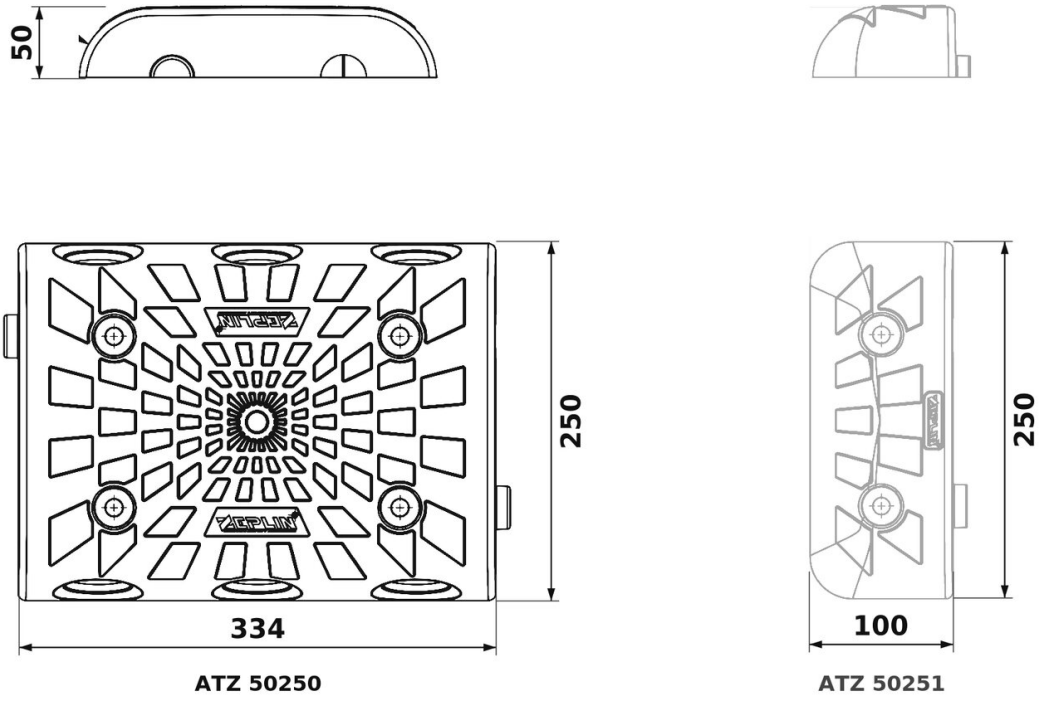

ATZ 50250 **ATZ 50251**

Dimensiuni în mm. PPC, negru sau galben; 1,5 kg; 4 dibluri + 4 șuruburi incluse.
Dimensions in mm. PPC, black or yellow; 1.5 kg; 4 dowels + 4 screws included.
6 catadioptri: 3 albi pe o latură, 3 roșii pe cealaltă. Capacul ATZ 50251 se comandă separat.
6 cat eyes: 3 white on one side, 3 red on the other. The ATZ 50251 end cap is ordered separately.

ATZ 50250 dimensions

Drawings and details · 2/4

Cum se montează un rând, alternat negru și galben

ATZ 50250

How a row goes together, alternating black and yellow



3 catadioptri roșii pe o latură, 3 albi pe cealaltă
3 red cat eyes on one side, 3 white on the other



ATZ 50250



ATZ 50251

Dimensiuni în mm: 5 x ATZ 50250 + 2 x ATZ 50251. Se vinde pe bucată; 3 limitatoare pe metru, alternate.
Dimensions in mm: 5 x ATZ 50250 + 2 x ATZ 50251. Sold per piece; 3 bumps per metre, alternating.
Pentru 2 m: 6 x ATZ 50250 + 2 x ATZ 50251; cu tot cu capace, rândul are 2,2 m.
For 2 m: 6 x ATZ 50250 + 2 x ATZ 50251; with the end caps the row is 2.2 m long.


ATZ 50250: how it is fitted

Drawings and details · 3/4


Detalii: catadioptri, prindere, îmbinare

ATZ 50250

Details: cat eyes, fixing, joint

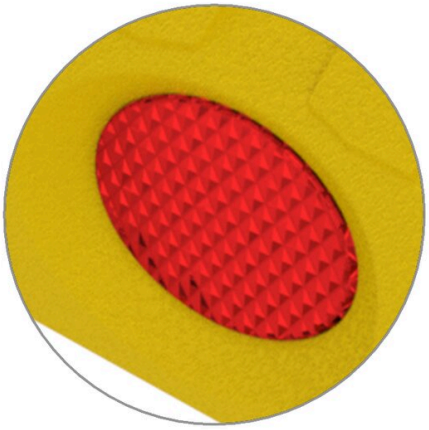


catadioptru roșu
red cat eye

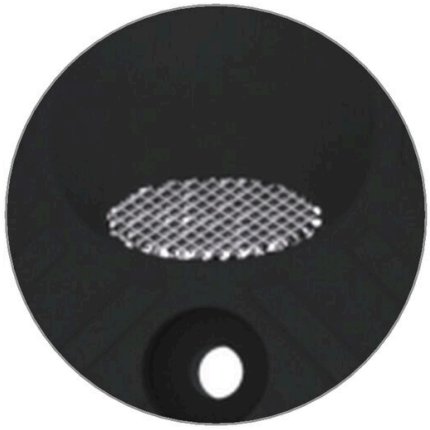

catadioptru alb, pe latura opusă
white cat eye, on the opposite side



gaură de prindere
fixing hole

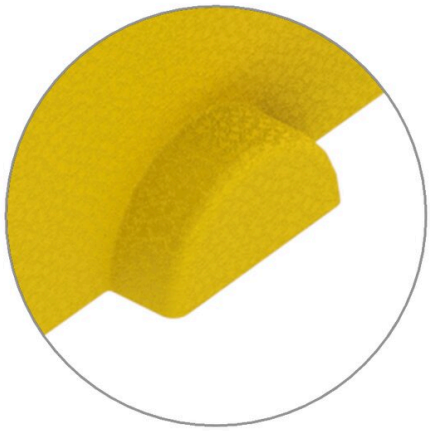

cheie de îmbinare
joining key

Fiecare bucată se fixează în asfalt sau beton cu 4 dibluri și 4 șuruburi, incluse.
Each piece is fixed to asphalt or concrete with 4 dowels and 4 screws, included.

ATZ 50250 details

Drawings and details · 4/4


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




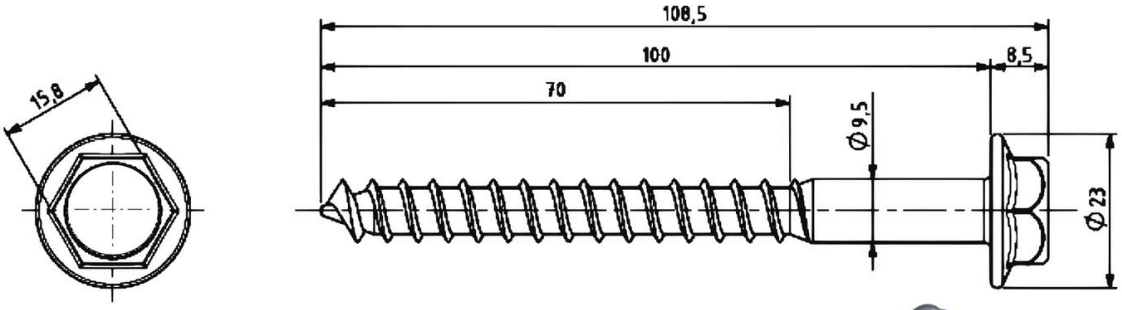



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

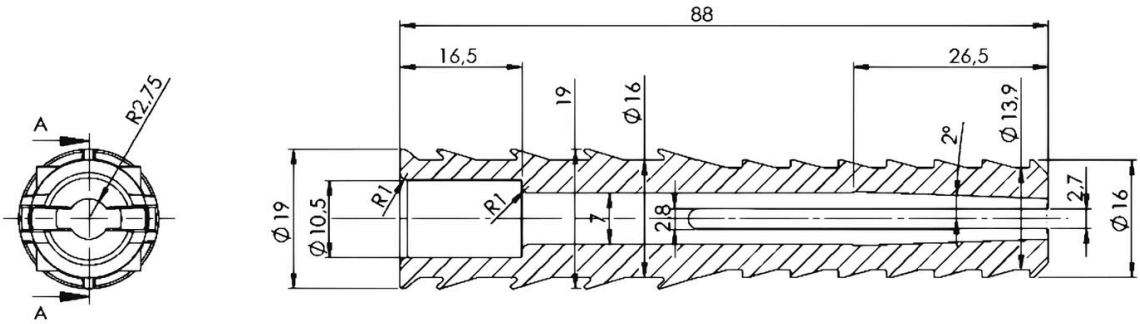

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

ATZ 50250 fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel