Set of 10 Flexible TPU Delineator Posts, 45 cm, Orange



AT A GLANCE

- 10 ATZ 8045 delineator posts, orange TPU.
- 45 cm, Ø8 cm post, Ø20 cm base.
- 2 metallised reflective bands per post.
- 3 plugs and 3 screws for each post.

Product code	**ATS 8045**
Category	**Signalling Sets**
Weight	**9.5 kg**

This product on attotrafic.ro
https://attotrafic.ro/en_US/products/set-10-stalpi-de-delimitare-flexibili-din-tpu-45-cm-portocaliu

Technical specifications

Material	TPU
Size (Post)	Ø8 cm
Size (Base)	Ø20 cm
Base Shape	Round
Reflective	Metalized

Description

A single delineator post separates nothing; a cycle lane or the edge of a car park needs a whole row. The ATS 8045-10 set holds 10 ATZ 8045 posts, enough for a 9 m line with a post every metre or a 45 m line with a post every 5 m.

The post

- TPU (thermoplastic polyurethane), orange RAL 2009, UV-protected;
- 45 cm tall, Ø8 cm post, Ø20 cm round base;
- 2 metallised reflective bands.

Flexible

When a car drives over it, the TPU post bends and springs back, so neither the post nor the car is damaged. At 45 cm, it can be seen from the car but does not block the view.

Installation

Each post comes with 3 Ø16 × 90 mm plugs and 3 Ø10 × 110 mm screws: 30 plugs and 30 screws in the whole set. Drill 3 holes in the asphalt, fit the plugs and tighten the base down.

Where it is used

On cycle lanes, to separate lanes, on access corridors, around pedestrian areas and as anti-parking posts. Taller: the ATS 8075 (75 cm) and the ATS 80100 (100 cm). The budget PE version, with 14 posts, is the ATS 8045E-14.

Drawings and details


Sistem de prindere: șurub ATZ 80A + diblu ATZ 90A

Fixing system: ATZ 80A screw + ATZ 90A dowel

ATZ 80A – Șurub Ø10 x 110 mm (DIN 571), cap hexagonal cu flanșă

ATZ 80A – Ø10 x 110 mm screw (DIN 571), hexagon flange head




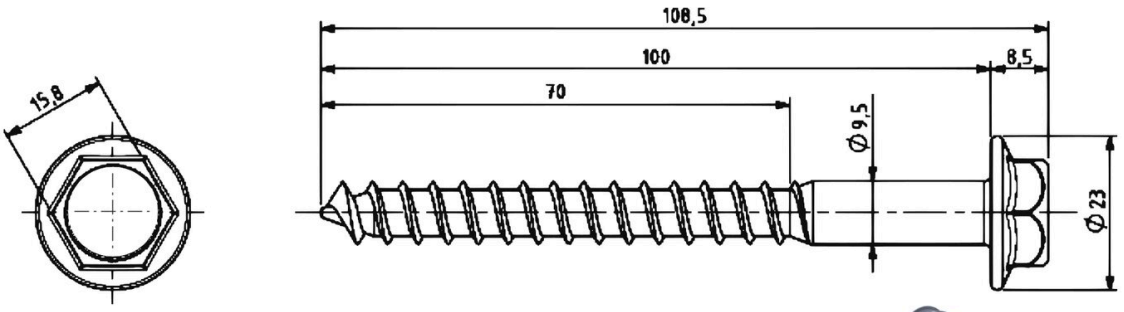



ATZ 90A – Diblu Ø16 x 90 mm (secțiune A-A)

ATZ 90A – Ø16 x 90 mm dowel (section A-A)

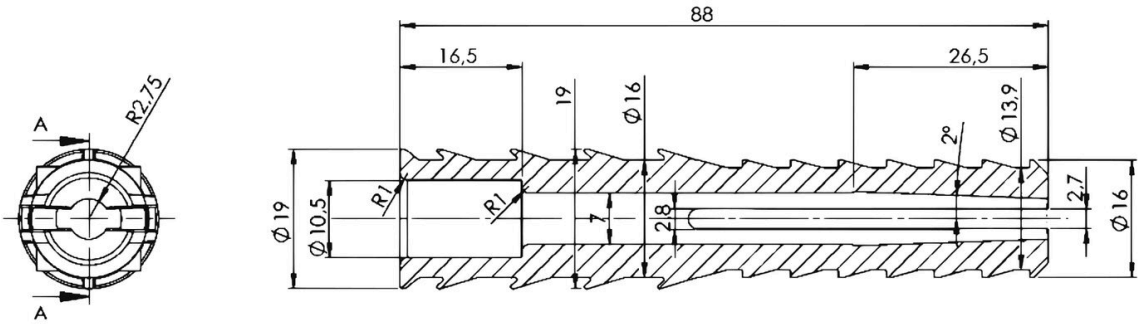

Dimensiuni în mm. Gaura pentru diblu: Ø16 mm. Șurubul are 100 mm sub cap și 108,5 mm în total; diblul are 88 mm.

Dimensions in mm. Hole for the dowel: Ø16 mm. The screw is 100 mm under the head, 108.5 mm overall; the dowel is 88 mm long.

Câte un diblu și un șurub pentru fiecare punct de prindere al produsului.

One dowel and one screw for each fixing point of the product.

ATS 8045 fixing system: ATZ 80A Ø10 × 110 mm screw and ATZ 90A Ø16 × 90 mm dowel